



Standard Power Supplies

From The World's No.1 Power Supply Company

October 2015

Table of Contents

■ Company Profile	02
■ Latest Products	03
■ Typical Applications	04 - 05
■ Selection Guide	06 - 15
■ DIN Rail Power Supply & Modules	16 - 45
CliQ DIN Rail Power Supply	18
CliQ II DIN Rail Power Supply	22
CliQ M DIN Rail Power Supply	30
Lyte DIN Rail Power Supply	32
Chrome DIN Rail Power Supply	36
Sync DIN Rail Power Supply	40
CliQ II DIN Rail Modules	42
■ Panel Mount Power Supply	46 - 75
PMC Panel Mount Power Supply	48
PMF Panel Mount Power Supply	57
PMH Panel Mount Power Supply	60
PMR Panel Mount Power Supply	62
PMT Panel Mount Power Supply	66
■ Open Frame Power Supply	76 - 95
PJ Open Frame Power Supply	78
PJB Open Frame Power Supply	86
PJT Open Frame Power Supply	88
■ Accessories	96 - 97
■ Standards & Approvals	98 - 102
■ LED Driver	103
■ Notes	104
■ More Information	105

Company Profile

Delta Electronics Group

World's No.1* Power Supply Company

Delta Electronics Group is the world's largest provider of switching power supplies and a major source for power management and renewable energy solutions. Established in 1971, Delta has sales offices and R&D facilities worldwide with manufacturing plants located in Taiwan, Thailand, China, Mexico, India and Europe.

As a global leader in power electronics, Delta has long been adopting Green manufacturing processes, recycling initiatives, waste management programs and environmentally-friendly green buildings. In 2014, Delta Electronics was selected for the prestigious Dow Jones Sustainability Index (DJSI) World for the fourth consecutive year. Amongst many other national and international awards, since 2010, Delta has also received more than 49 internationally recognized technology and design awards.

1 Standard Power Supplies



Since 2008, Delta's Industrial Power Supply (IPS) team had been launching many new products in Delta's global distribution channels nearly on a monthly basis. These products which include DIN Rail, Panel Mount, Open Frame and LED Driver types offer customers the same industrial leading technology and quality that Delta's ODM partners are familiar with. Delta standard power supplies are able to cater to nearly all industrial applications including cash management and automation solutions and many more. With the wide range of reliable products and world class customer support, the IPS team had seen more than 90% CAGR between 2008 to 2014. Please visit our standard product homepage at www.DeltaPSU.com for more product information.

2 Modified Standard Power Supplies



Many top tier electronics companies on the Fortune® 500 list have long regarded Delta as a trusted ODM partner. These companies expect nothing less than the best technology and quality. With decades of industrial leading manufacturing and design experiences in ODM power management products, IPS team can also offers our customers modified standard products by leveraging from the wide range of standard products in our catalog. Modified standard products enable our customers to optimize their costs and product development time. For further query, please contact your local Delta distributor or simply send your query to info@deltapsu.com.

*Based on global sales revenue from the Micro-Tech Consultants March 2015 report

Latest Products

Delta Standard Power Supplies

CliQ M

Slim Design with Advanced Power Boost (APB)



CliQ^M

80W–240W

PAGES 30-31

- Universal AC input voltage range
- High power density in corrosion resistant aluminium casing
- Power Boost of 150% for 5s
- Conformal coating on PCBAs to protect against common dust and chemical pollutants

Lyte

Competitively Priced for General Applications



LYTE

24V 120W/ 48V 120W

PAGES 32-35

- Universal AC input voltage range
- Built-in constant current circuit
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Built-in DC OK contact (for DRL-24V120W1AR and DRL-48V120W1AR)

Sync

Ultra Compact Size with NEC Class 2



sync

5V 15W/ 24V 30W

PAGES 40-41

- Universal AC input voltage range and full power up to 55°C
- Power will not de-rate for the entire input voltage range
- NEC Class 2 / Limited Power Source (LPS) certified
- High MTBF > 500,000 hrs per Telcordia SR-332

PMH

Household and ITE Safety Approvals



PMH

150W–200W

PAGES 60-61

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- High MTBF > 700,000 hrs per Telcordia SR-332
- Also available: IP20, Front Face and Harness connectors

Typical Applications

Delta Standard Power Supplies



LED

LED Signage/ Display

Applicable Series

PMC, PMT, PMF, PMR



Oil & Gas

Oil & Gas

- Petrol station
- Oil refinery

Applicable Series

CliQ, CliQ II, CliQ M



LED

LED Lighting

Applicable Series

LNE



Industry

Factory

- Automation process
- Automation engineering

Applicable Series

CliQ, CliQ II, CliQ M, Lyte, Chrome, Sync, PMC, PMT, PMF



Marine


Maritime

- Offshore

Applicable Series

CliQ M



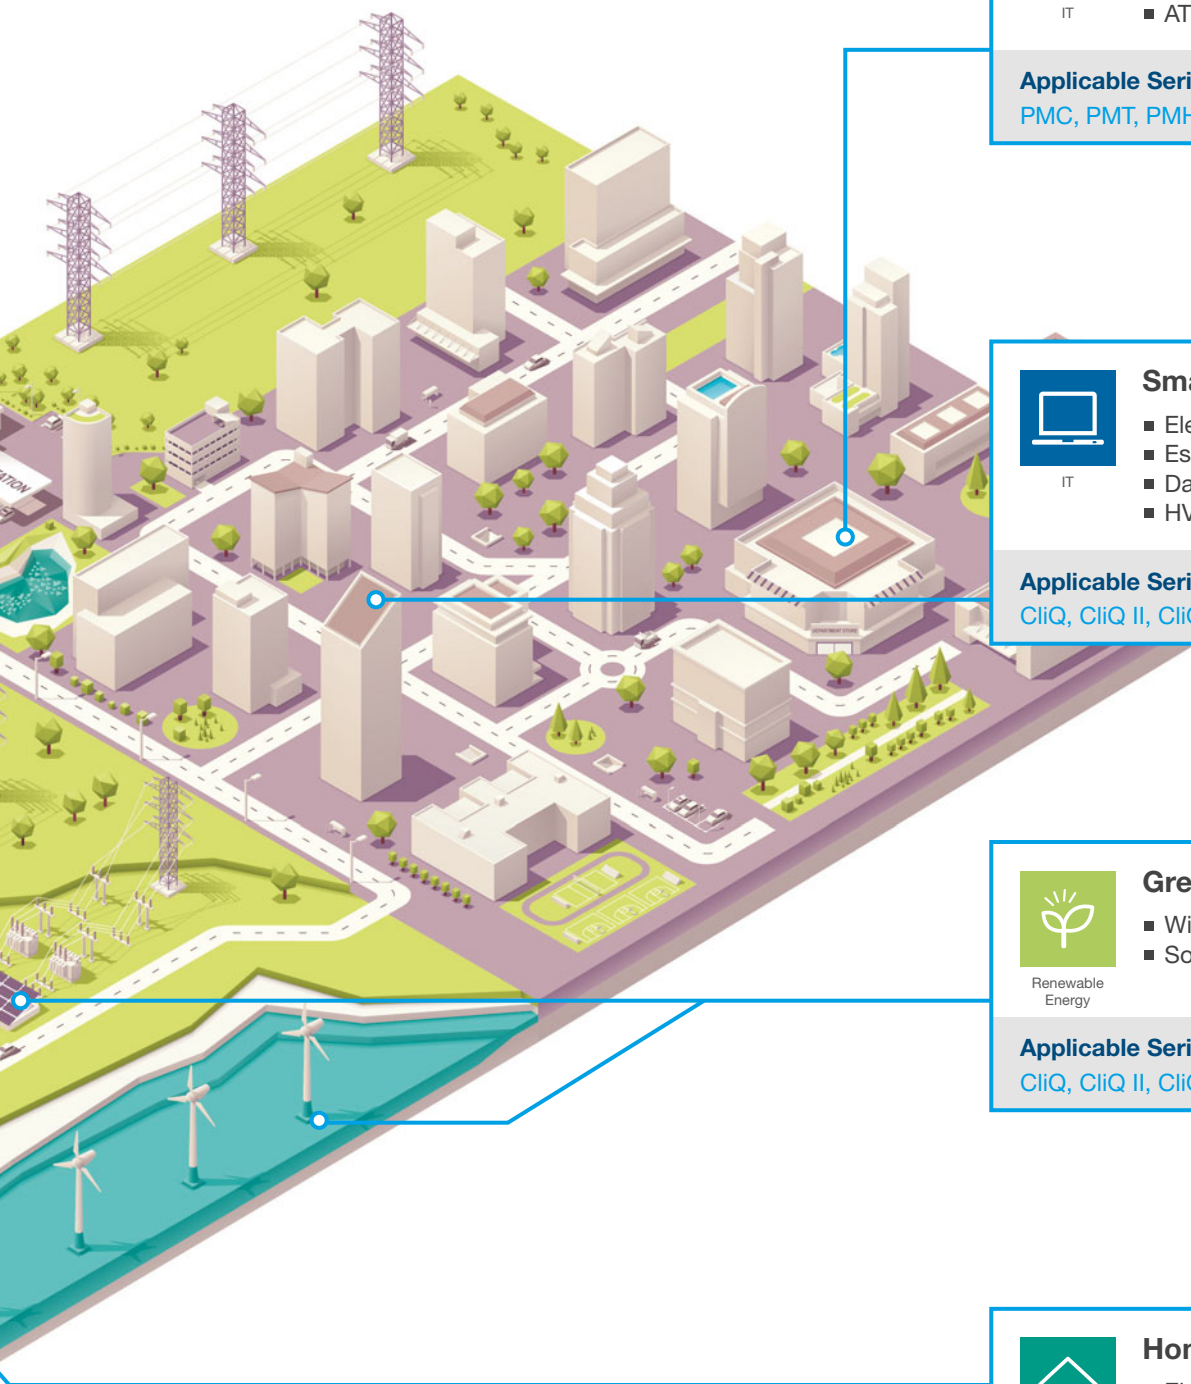

IT

Department Store

- Automatic door
- Vending machine
- ATM

Applicable Series

PMC, PMT, PMH, PMF, PJ, PJB, PJT



IT

Smart Building

- Elevator
- Escalator
- Data center
- HVAC

Applicable Series

CliQ, CliQ II, CliQ M, Lyte, Chrome, Sync



Renewable
Energy

Green Energy

- Wind turbine
- Solar farm

Applicable Series

CliQ, CliQ II, CliQ M, Lyte



Household

Home

- Electrical appliances
- Home automation controller

Applicable Series

CliQ II, Chrome, PMC, PMH

Selection Guide

Delta Standard Power Supplies

New products are frequently introduced. Please visit www.DeltaPSU.com for latest product updates.

Product Type	Series	Model Name	Phase			PFC	Output Voltage	Output Current			
			1	2	3				15W	30W	48W
DIN Rail Power Supply	CliQ	DRP012V015W1A□	●				12V	1.25A	●		
		DRP012V030W1A□	●					2.50A		●	
		DRP012V060W1AA	●					5.00A			
		DRP012V100W1AA	●					8.33A			
		DRP-24V48W1AZ	●				24V	2.00A			●
		DRP024V060W1AZ	●					2.50A			
		DRP024V060W1AA	●					2.50A			
		DRP024V120W1AA	●			●		5.00A			
		DRP024V240W1AA	●			●		10.0A			
		DRP024V480W1AA	●			●		20.0A			
	CliQ II	DRP024V060W1B□	●				24V	2.50A			
		DRP024V120W1B□	●					5.00A			
		DRP024V240W1B□	●			●		10.0A			
		DRP024V480W1B□	●			●		20.0A			
		DRP024V060W1N□	●					2.50A			
		DRP-24V100W1NN	●			●		3.80A			
		DRP-24V120W2BN	●	●				5.00A			
		DRP-24V240W2BN	●	●		●		10.0A			
		DRP024V060W3B□		●	●			2.50A			
		DRP024V120W3B□		●	●			5.00A			
		DRP024V240W3B□		●	●			10.0A			
		DRP024V480W3B□		●	●	●		20.0A			
		DRP024V960W3BN		●	●	●		40.0A			
		DRP048V060W1B□	●				48V	1.25A			
		DRP048V120W1B□	●			●		2.50A			
		DRP048V240W1B□	●			●		5.00A			
		DRP048V480W1B□	●			●		10.0A			

CliQ DIN Rail Power Supply Model Numbering

DR	P	XXXV	XXXW	□	□	□
DIN Rail	Product Type P - Power Supply	Output Voltage	Output Power	Phase Input 1 - Single Phase	A - CliQ Series	A - Metal Case, with Class I, Div 2 Y - Plastic Case, with Class I, Div 2 Z - Plastic Case, without Class I, Div 2

Output Power						Input Voltage Range	Safety Standards	Page
60W	100W	120W	240W	480W	960W			
						85-264Vac (DC input range 120-375Vdc)*		18-19
						85-264Vac (DC input range 120-375Vdc)*		20-21
						85-264Vac (DC input range 120-375Vdc)*		22-23
						85-264Vac (DC input range 120-375Vdc)*		24-25
	91.2W					2 x 180-550Vac or 180-305Vac (Single Phase) (DC input range 254-780Vdc)*		26-27
						3 x 320-600Vac or 2 x 360-600Vac (DC input range 450-800Vdc)*		
						For 960W: 3 x 320-600Vac or 2 x 380-600Vac (DC input range 450-800Vdc)*		28-29
						85-264Vac (DC input range 120-375Vdc)*		

*DC input is certified for selected models.

CliQ II DIN Rail Power Supply Model Numbering

DR	P	XXXV	XXXW	□	□	□
DIN Rail	Product Type P - Power Supply	Output Voltage	Output Power	Phase Input 1 - Single Phase 2 - Two Phase 3 - Three Phase	B - CliQ II Series N - NEC Class 2	A - Metal Case, with Class I, Div 2 N - Metal Case, without Class I, Div 2 Y - Plastic Case, with Class I, Div 2 Z - Plastic Case, without Class I, Div 2

Selection Guide

Delta Standard Power Supplies

New products are frequently introduced. Please visit www.DeltaPSU.com for latest product updates.

Product Type	Series	Model Name	Phase		PFC	Output Voltage	Output Current			
			1	3				10W	15W	30W
DIN Rail Power Supply	CliQ M - Slim design - Advanced Power Boost	DRM-24V80W1PN	●		●	24V	3.40A			
		DRM-24V120W1PN	●		●		5.00A			
		DRM-24V240W1PN	●		●		10.0A			
	Lyte - Competitively priced - Built-in DC OK contact (for selected models)	DRL-24V120W1AN	●			24V	5.00A			
		DRL-24V120W1AR	●				5.00A			
		DRL-48V120W1AN	●			48V	2.50A			
		DRL-48V120W1AR	●				2.50A			
	Chrome - Compact - Class II double isolation - NEC Class 2	DRC-5V10W1AZ	●			5V	1.50A	7.5W		
		DRC-12V10W1AZ	●			12V	0.83A	●		
		DRC-12V30W1AZ	●				2.10A			25.2W
		DRC-12V60W1AZ	●				4.50A			
		DRC-24V10W1AZ	●			24V	0.42A	●		
		DRC-24V30W1AZ	●				1.25A			●
		DRC-24V60W1AZ	●				2.50A			
		DRC-24V100W1AZ	●				3.80A			
	Sync - Compact - Competitively priced	DRS-5V30W1NZ	●			5V	3.00A		●	
		DRS-24V30W1AZ	●			24V	1.25A			●
		DRS-24V30W1NZ	●				1.25A			●

Product Type	Series	Model Name	Output Voltage	Output Current	
Redundancy Module	CliQ II	DRR-20□	22-60V	20.0A	(1+1 Redundancy) = Nominal 2
		DRR-40□		40.0A	(1+1 Redundancy) = Nominal 2
DC-UPS Module		DRU-24V40ABN	24V	40.0A	Charging Mode: 2.0A ± 1.0A
Buffer Module		DRB-24V020AB□	24V	20.0A	Charging Mode: < 0.6A
		DRB-24V040ABN		40.0A	Charging Mode: < 0.6A

CliQ M DIN Rail Power Supply Model Numbering

DR	M –	XXV	XXXW	1	P	N
DIN Rail	Product Series M - CliQ M Series	Output Voltage	Output Power	Phase Input 1 - Single Phase	Advanced Power Boost (APB)	N - Metal Case, without Class I, Div 2

Lyte DIN Rail Power Supply Model Numbering

DR	L –	XXV	XXXW	1	A	□
DIN Rail	Product Series L - Lyte Series	Output Voltage	Output Power	Phase Input 1 - Single Phase	No PFC	N - Without DC OK Contact R - With DC OK Contact

Chrome DIN Rail Power Supply Model Numbering

DR	C –	XXV	XXXW	1	A	□
DIN Rail	Product Type C - Isolation Class II Power Supply	Output Voltage	Output Power	Phase Input 1 - Single Phase	No PFC	Z - Black Case G - Grey Case

Output Power					Input Voltage Range	Safety Standards							Page
60W	80W	100W	120W	240W									
	●				85-276Vac (DC input range 88-375Vdc)*	CE		 US	 US			30-31	
			●		85-264Vac (DC input range 88-375Vdc)*	CE		 US	 US		 		
				●	85-276Vac (DC input range 88-375Vdc)*	CE		 US	 US				
			●		85-264Vac	CE		 US	 US			32-33	
			●			CE		 US	 US				
			●				CE		 US	 US			34-35
			●			CE		 US	 US				
					90-264Vac	CE		 US	 US			36-37	
						CE		 US	 US		EAC		
						CE		 US	 US		EAC		
54W						CE		 US	 US		EAC		
					90-264Vac	CE		 US	 US		EAC	38-39	
						CE		 US	 US		EAC		
●						CE		 US	 US		EAC		
	91.2W					CE		 US	 US		EAC		
					85-264Vac (DC input range 120-375Vdc)*	CE		 US	 US			40-41	
					85-264Vac	CE		 US	 US		EAC 		
					85-264Vac (DC input range 120-375Vdc)*	CE		 US	 US				

*DC input is certified for selected models.

Input Current		Input Voltage Range	Safety Standards								Page
x 12.5A	(N+1 Redundancy) = Nominal 2 x 10A	22-60Vdc	 					EAC			
x 25A	(N+1 Redundancy) = Nominal 2 x 20A										
		23-28Vdc	 						EAC		
		22.8-28.8Vdc	 						EAC		

Sync DIN Rail Power Supply Model Numbering

DR	S –	XXV	XXXW	1	□	Z
DIN Rail	Product Series S - Sync Series	Output Voltage	Output Power	Phase Input 1 - Single Phase	A - No PFC N - NEC Class 2	Delta Standard

Redundancy Module Model Numbering

DR	R –	XX	□
DIN Rail	Product Type R - Redundancy Module	Output Current 20 - 20A 40 - 40A	A - Metal Case, with Class I, Div 2 N - Metal Case, without Class I, Div 2

DC-UPS Module and Buffer Module Model Numbering

DR	□ –	24V	XXXXA	B	□
DIN Rail	Product Type U - DC-UPS Module B - Buffer Module	Output Voltage	Output Current	CliQ II Series	A - Metal Case, with Class I, Div 2 N - Metal Case, without Class I, Div 2

Selection Guide

Delta Standard Power Supplies

New products are frequently introduced. Please visit www.DeltaPSU.com for latest product updates.

Product Type	Series	Model Name	Phase		PFC	Output Voltage	Output Current				
			1	3				15W	35W	50W	60W
Panel Mount Power Supply	PMC	- Aluminium casing - Universal AC input voltage	PMC-05V015W1AA	●			5V	3.00A	●		
			PMC-05V035W1A□	●				7.00A		●	
			PMC-05V050W1AA	●				10.0A			●
			PMC-12V035W1A□	●			12V	3.00A		●	
			PMC-12V050W1A□	●				4.17A			●
			PMC-12V060W1NA	●				5.00A			●
			PMC-12V100W1AA	●				8.33A			
			PMC-12V150W1B□	●		●		12.5A			
			PMC-24V035W1A□	●			24V	1.46A		●	
			PMC-24V050W1A□	●				2.10A			●
			PMC-24V075W1A□	●				3.12A			
			PMC-24V100W1A□	●				4.17A			
			PMC-24V150W1A□	●				6.25A			
			PMC-24V150W2AA	●				6.25A			
			PMC-24V150W1B□	●		●		6.25A			
			PMC-24V300W1BA	●		●		12.5A			
			PMC-24V600W1BA	●		●		25.0A			
			PMC-DSPV100W1A	●			24V / 5V	2.70A / 7.00A			
			PMC-48V150W1B□	●		●	48V	3.125A			
	PMF	- Remote ON/OFF - Built-in PFC	PMF-4V320WC□□	●		●	4.2V	55.0A			
			PMF-5V320WC□□	●		●	5V	55.0A			
			PMF-24V200WC□□	●		●	24V	8.40A			
			PMF-24V240WC□□	●		●		10.0A			
			PMF-24V320WC□□	●		●		13.3A			
	PMH	Household and ITE safety approvals	PMH-24V50WCA□	●			24V	2.10A			●
			PMH-24V100WCA□	●				4.16A			
			PMH-24V150WCB□	●		●		6.25A			
			PMH-24V200WCB□	●		●		8.33A			

PMC Panel Mount Power Supply Model Numbering

PM	C –	XXV	XXXW	□	□	□
Panel Mount	Product Type C - Enclosed	Output Voltage	Output Power	Phase Input 1 - Single Phase, Wide Range Input Voltage 2 - Single Phase, High Line Input Voltage	A - No PFC B - With PFC N - NEC Class 2	Connector Type A - Terminal Block ³⁾ J - IP20 Connector ¹⁾ L - Front Face ²⁾

1) Options

2) Options for 150W with PFC

3) For PMC-05V015W1AA and PMC-24V600W1BA, the connector type is a Front Face connector

PM	C –	D	SPV	100W	1	A
Panel Mount	Product Type C - Enclosed	Dual Output	Output Voltage S - 24V P - 5V	Output Power	Phase Input Single Phase	Delta Standard

Output Power								Input Voltage Range	Safety Standards	Page
75W	100W	150W	200W	240W	300W	320W	600W			
								85-264Vac (DC input range 125-375Vdc)*	CE SI CULUS EAC	48-49
									CE SI CULUS EAC	
									CE SI CULUS EAC	
								85-264Vac (DC input range 125-375Vdc)*	CE A CULUS EAC	50-51
									CE A CULUS EAC	
									CE A CULUS EAC	
	●								CE A CULUS EAC	
		●							CE SI CULUS EAC	
								85-264Vac (DC input range 125-375Vdc)*	CE N CULUS EAC	52-53
									CE N CULUS EAC	
●									CE A CULUS EAC	
	●								CE N CULUS EAC	
		●							CE A CULUS EAC	
								180-264Vac (DC input range 220-375Vdc)*	CE A CULUS EAC	54-55
		●							CE SI CULUS EAC	
		●						85-264Vac (DC input range 125-375Vdc)*	CE SI CULUS EAC	
					●				CE SI CULUS EAC	
						●		85-264Vac (DC input range 120-370Vdc)*	CE SI CULUS EAC	
	●							85-264Vac (DC input range 125-375Vdc)*	CE A CULUS EAC	56-57
		●						85-264Vac (DC input range 125-375Vdc)*	CE SI CULUS EAC	
								85-264Vac	CE A CULUS EAC	
							231W	85-264Vac	CE A CULUS EAC	58-59
							275W		CE A CULUS EAC	
			●					85-264Vac	CE A CULUS EAC	
				●					CE A CULUS EAC	60-61
						●			CE A CULUS EAC	
								85-264Vac (DC input range 120-375Vdc)*	CE SI CULUS EAC	
	●								CE SI CULUS EAC	
		●							CE SI CULUS EAC	
			●						CE SI CULUS EAC	

*DC input is certified for selected models.

PMF Panel Mount Power Supply Model Numbering

PM	F –	XXV	XXXW	C	□	□
Panel Mount	Product Series F - PFC Series	Output Voltage	Output Power	Package Type C - Enclosed	Connector Type G - Front Face A - Terminal Block ¹⁾	Variable B - No Remote ON/OFF R - With Remote ON/OFF ¹⁾

1) Options

PMH Panel Mount Power Supply Model Numbering

PM	H –	XXV	XXXW	C	□	A
Panel Mount	Product Series H - Household Series	Output Voltage	Output Power	Package Type C - Enclosed	A - No PFC B - With PFC	Connector Type A - Terminal Block J - IP20 connector L - Front Face H - Harness

Selection Guide

Delta Standard Power Supplies

New products are frequently introduced. Please visit www.DeltaPSU.com for latest product updates.

Product Type	Series	Model Name	Phase		PFC	Output Voltage	Output Current			
			1	3				35W	50W	100W
Panel Mount Power Supply	PMR • Thickness < 1U • Built-in PFC	PMR-4V320WC□A	●		●	4.2V	60.0A			
		PMR-4V320WDAA	●		●		60.0A			
		PMR-4V320WDGA	●		●		60.0A			
		PMR-4V320WDBA	●		●		60.0A			
		PMR-4V320WDCA	●		●		60.0A			
		PMR-5V320WC□A	●		●	5V	60.0A			
		PMR-5V320WDAA	●		●		60.0A			
		PMR-5V320WDGA	●		●		60.0A			
		PMR-5V320WDBA	●		●		60.0A			
		PMR-5V320WDCA	●		●		60.0A			
	PMT • UL approval • Basic specs • High MTBF	PMT-4V350W1A□	●			4.2V	60.0A			
		PM□-5V35W1A□	●			5V	7.00A	●		
		PM□-5V50W1A□	●				10.0A		●	
		PMT-5V350W1A□	●				60.0A			
		PM□-12V35W1A□	●			12V	2.92A	●		
		PM□-12V50W1A□	●				4.20A		●	
		PM□-12V100W1A□	●				8.50A			●
		PM□-12V150W1A□	●				12.5A			
		PM□-15V50W1A□	●			15V	3.40A		●	
		PM□-24V35W1A□	●			24V	1.46A	●		
		PM□-24V50W1A□	●				2.09A		●	
		PM□-24V100W1A□	●				4.50A			●
		PM□-24V150W1A□	●				6.50A			
		PM□-24V200W1A□	●				8.80A			
		PMT-24V350W1AG	●				14.6A			
		PMT-24V350W1AM	●				14.6A			
		PMT-24V350W1AK	●				14.6A			
		PMT-24V350W1AR	●				14.6A			
		PMT-36V350W1A□	●			36V	9.70A			
		PM□-48V150W1A□	●			48V	3.30A			
		PMT-48V350W1A□	●				7.30A			
		PM□-D1V100W1A□	●			12V / 5V	7.00A / 3.00A			●
		PM□-D2V100W1A□	●			24V / 5V	3.50A / 3.00A			●

PMR Panel Mount Power Supply Model Numbering

PM	R –	XXV	XXXW	□	□	□
Panel Mount	Product Series R - Standard Rack Type Series (1U)	Output Voltage	Output Power	Package Type C - Enclosed with Fan D - Enclosed without Fan	Connector Type A - Terminal Block B - Terminal Block (Parallel Operation) ¹⁾ G - Front Face ²⁾ C - Front Face (Parallel Operation) ¹⁾	Variable A - Conformal coating

1) Options for Enclosed without Fan (PMR-□V320WDBA and PMR-□V320WDCA)

2) Options

Output Power					Input Voltage Range	Safety Standards	Page
150W	200W	240W	320W	350W			
			252W		88-264Vac	CE   	62-63
			252W			CE   	
			252W			CE   	
			252W			CE   	
			252W			CE   	
			300W		88-264Vac	CE   	64-65
			300W			CE   	
			300W			CE   	
			300W			CE   	
			300W			CE   	
			252W		90-132Vac, 180-264Vac (Selectable by Switch)	   EAC	66-67
					85-264Vac	CE   	
						CE   	
			300W		90-132Vac, 180-264Vac (Selectable by Switch)	   EAC	68-69
					90-264Vac	CE    EAC	
						CE    EAC	
●					90-132Vac, 180-264Vac (Selectable by Switch)	CE    EAC	
						CE    EAC	
					85-264Vac	CE   	70-71
					90-264Vac	CE    EAC	
						CE    EAC	
●					90-132Vac, 180-264Vac (Selectable by Switch)	CE    EAC	
						CE    EAC	
	●				90-132Vac, 180-264Vac (Selectable by Switch)	   EAC	72-73
				●		  	
				●		  	
				●		CE    EAC	
				●		CE   	
			349.2W			CE   	74-75
●					90-132Vac, 180-264Vac (Selectable by Switch)	CE   	
				●		CE   	
					88-132Vac, 176-264Vac (Selectable by Switch)	CE    EAC	
						CE    EAC	

PMT Panel Mount Power Supply Model Numbering

							CC Code
PM	□ –	XXV	XXXW	1	A	□	□
Panel Mount	Product Type T - Enclosed L - L Frame ¹⁾ B - Open Frame ²⁾	Output Voltage	Output Power	Phase Input Single Phase	No PFC	Connector Type <u>With UL, TUV, CE, CCC</u> A - Terminal Block G - Front Face ³⁾ H - Harness ³⁾ <u>With UL, TUV, CE</u> R - Terminal Block K - Front Face ⁴⁾ <u>With UL</u> M - Terminal Block N - Front Face G - Front Face ⁵⁾	Blank - Without connector cover A - With connector cover B - Conformal coating ⁶⁾

							CC Code
PM	□ –	XXV	XXXW	1	A	□	□
Panel Mount	Product Type T - Enclosed L - L Frame ¹⁾	Output Voltage <u>Dual Output</u> D1 - 12V / 5V D2 - 24V / 5V	Output Power	Phase Input Single Phase	No PFC	Connector Type A - Terminal Block G - Front Face ³⁾ H - Harness ³⁾	Blank - Without connector cover A - With connector cover

1) Options for 35W-200W

2) Options for 35W and 50W (except for 5V/35W, 5V/50W and 15V/50W models)

3) Options (Harness connector is not available for 5V/50W model)

4) Options for PMT-24V350W1AK, PMT-36V350W1A□ and PMT-48V350W1A□

5) For PMT-24V350W1AG only

6) For PMT-4V350W1AM and PMT-5V350W1AM

Selection Guide

Delta Standard Power Supplies

New products are frequently introduced. Please visit www.DeltaPSU.com for latest product updates.

Product Type	Series	Model Name	Phase		PFC	Output Voltage	Output Current		
			1	3				15W	30W
Open Frame Power Supply	PJ • Built-in PFC • Versatile configurations • Conformal coating	PJ-12V15W□NA	●			12V	1.30A	●	
		PJ-12V30W□NA	●				2.50A		●
		PJ-12V50W□NA	●		●		4.30A		
		PJ-12V100W□□A	●		●		8.50A		
		PJ-12V150W□□A	●		●		12.5A		
		PJ-24V30W□NA	●			24V	1.25A		●
		PJ-24V50W□NA	●		●		2.10A		
		PJ-24V100W□□A	●		●		4.30A		
		PJ-24V150W□□A	●		●		6.30A		
		PJ-5V15W□NA	●			5V	3.00A	●	
		PJ-48V50W□NA	●		●	48V	1.10A		
	PJB • Built-in PFC / Power Boost • Conformal coating	PJB-24V100W□□A	●		●	24V	4.30A		
		PJB-24V150W□□A	●		●		6.30A		
	PJT • Built-in PFC • Small footprint	PJT-12V40WBA□	●			12V	3.33A		
		PJT-12V65WBA□	●				5.00A		
		PJT-12V100WBA□	●		●		8.33A		
		PJT-12V100WBB□	●				6.67A (Convection) 8.33A (Forced Cooling)		
		PJT-15V40WBA□	●			15V	2.67A		
		PJT-15V65WBA□	●				4.20A		
		PJT-15V100WBA□	●		●		6.67A		
		PJT-15V100WBB□	●				5.33A (Convection) 6.67A (Forced Cooling)		
		PJT-18V40WBA□	●			18V	2.22A		
		PJT-18V65WBA□	●				3.61A		
		PJT-18V100WBA□	●		●		5.55A		
		PJT-18V100WBB□	●				4.44A (Convection) 5.55A (Forced Cooling)		
		PJT-24V40WBA□	●			24V	1.66A		
		PJT-24V65WBA□	●				2.71A		
		PJT-24V100WBA□	●		●		4.17A		
		PJT-24V100WBB□	●				3.33A (Convection) 4.17A (Forced Cooling)		

PJ Open Frame Power Supply Model Numbering

PJ –	XXV	XXXW	□	□	A
Open Frame	Output Voltage	Output Power	Product Type C - Enclosed L - L Frame ¹⁾ B - Open Frame ¹⁾	Remote ON/OFF Function N - No Remote ON/OFF R - With Remote ON/OFF ²⁾	Delta Standard

1) Options

2) Options for 100W and above

Output Power					Input Voltage Range	Safety Standards			Page
40W	50W	65W	100W	150W					
					85-264Vac	CE		EAC	78-80
						CE		EAC	
	•					CE		EAC	
			•			CE		EAC	
				•		CE		EAC	
					85-264Vac	CE		EAC	81-83
	•					CE		EAC	
			•			CE		EAC	
				•		CE		EAC	
					85-264Vac	CE		EAC	84-85
	•					CE		EAC	
			•		85-264Vac	CE		EAC	86-87
				•		CE		EAC	
•					90-264Vac	CE		EAC	88-89
		60W				CE		EAC	
			•			CE		EAC	
			•			CE		EAC	
•					90-264Vac	CE		EAC	90-91
		•				CE		EAC	
			•			CE		EAC	
			•			CE		EAC	
•					90-264Vac	CE		EAC	92-93
		•				CE		EAC	
			•			CE		EAC	
			•			CE		EAC	
•					90-264Vac	CE		EAC	94-95
		•				CE		EAC	
			•			CE		EAC	
			•			CE		EAC	

PJB Open Frame Power Supply Model Numbering

PJ	B –	XXV	XXXW	□	□	A
Open Frame	Product Series B - Power Boost Series	Output Voltage	Output Power	Package Type C - Enclosed L - L Frame ¹⁾ B - Open Frame ¹⁾	Remote ON/OFF Function N - No Remote ON/OFF R - With Remote ON/OFF ¹⁾	Delta Standard

1) Options

PJT Open Frame Power Supply Model Numbering

PJ	T –	XXV	XXXW	□	□	□
Open Frame	Product Series T - ITE Application Series	Output Voltage	Output Power	Package Type B - Open Frame	Family Code A-B	Connector Type A - JST connector B - Molex connector ¹⁾ C - JWT connector ¹⁾

1) Options

Standard Products


DIN Rail Power Supply & Modules

CliQ™



The CliQ DIN rail power supply series from one of the world's leading power supply companies, Delta Electronics Group, offers state-of-the-art designs made to withstand harsh industrial environments in accordance to ATEX requirements. The rugged metal or plastic case is both shock and vibration resistant according to IEC 60068-2. The CliQ power supplies include overvoltage, overload and over temperature protections for the output. Using a wide input voltage range design, Delta's CliQ DIN rail power supply series is usable worldwide and features built-in Power Boost of 150% for 3 seconds. Such feature enables reserve power to be always available for reliable startup of loads with high inrush current thus eliminating the need of a more expensive power supply at higher power rating.

Typical Applications



CliQ II



Delta's CliQ II DIN rail power supply series are made to withstand harsh industrial environments with its PCBAs applied with conformal coating. The rugged metal or plastic case is both shock and vibration resistant according to IEC 60068-2 and adhere to IP20 protection level with ATEX certification available as option. The CliQ II power supplies also provide overvoltage, overload and over temperature protections for the output. Using a wide input voltage range design, Delta's CliQ II DIN rail power supply series is usable worldwide and features built-in Power Boost of 150% for 5 seconds. Such feature enables reserve power to be always available for reliable startup of loads with high inrush current without the need of a more expensive power supply at higher power rating.

Typical Applications




CliQ M



Delta Electronics is introducing one of the slimmest DIN rail industrial power supplies in its class, the CliQ M DIN rail power supply series. The high power density product is designed according to major industrial and marine (Lloyd's Register) safety standards. In addition to having Power Boost of 150% for 5 seconds, the CliQ M series is the first in the CliQ family to provide the Advanced Power Boost (APB) feature. With multiple loads connected in a system, a large outrush current could be drawn (demanded) due to one fault load. This will be detected by APB. The APB will trip the circuit breaker (circuit breaker with appropriate rating based on the system load) on the current path of the fault load due to high current. This thus prevents the system from shutting down while the other connected current paths continue to operate without interruption.

Typical Applications



All Delta power supplies are fully compliant with RoHS Directive 2011/65/EU for environmental protection. For more information or enquiries, please do not hesitate to contact your local Delta Electronics distributor or visit www.DeltaPSU.com.

LYTE



Delta Lyte DIN rail power supply series is designed for cost sensitive users with essential features fulfilling the needs in general industrial applications without compromising on quality and reliability. The series offers overcurrent protection in constant current mode which makes the Lyte series suitable for inductive and capacitive load applications. In addition, the Lyte series comes with both panel and DIN rail mounting options to provide users with more installation flexibility. The Lyte series features universal AC input range and is certified to safety standard according to IEC/EN/UL 60950-1 for Information Technology Equipment (ITE) and UL 508 for Industrial Control Equipment (ICE).

Typical Applications




CHROME



The Chrome DIN rail power supply series is designed for use in compact cabinets which are widely adopted in home automations and the food and beverage industry. Current available specifications are with 5V, 12V and 24V output voltage for power ratings of 10W to 100W. Delta Chrome DIN rail power supply series offers double isolated input. This means that no earth connection is required thus resulting in low leakage current. The Chrome series features universal AC input range and is certified to safety standard according to IEC/EN/UL 60950-1 for Information Technology Equipment (ITE) and UL 508 for Industrial Control Equipment (ICE). NEC Class 2 and Limited Power Source (LPS) approvals are available.

Typical Applications




sync



The ultra compact and competitively priced Delta Sync DIN rail power supply series is designed for general industrial applications requiring highly reliable power supply within a tight space. The Sync series operates with universal AC input range and offers full power up to 55°C. All models in the series are certified according to IEC/EN/UL 60950-1 Information Technology Equipment (ITE) and UL 508 Industrial Control Equipment (ICE).

Typical Applications



cliQ



The DIN rail modules are designed to work seamlessly with Delta CliQ family of power supplies to increase the operational reliability of the system it is connected with. These products include Buffer module, Redundancy module and DC-UPS module which can be used in most applications that can accommodate DIN rail power supplies.

Typical Applications



CliQ DIN Rail Power Supply

12V Output



HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Power Boost of 150% for 3 seconds
- Full corrosion resistant aluminium casing for 12V/60W and 12V/100W
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Multiple wire connections to terminals allowed
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Hazardous Locations approval to ATEX and Class I, Div 2





GENERAL SPECIFICATIONS

OUTPUT	DRP012V015W1A□	DRP012V030W1A□	DRP012V060W1AA	DRP012V100W1AA
Output Voltage	12V	12V	12V	12V
Output Voltage Range	11-14V	11-14V	11-14V	11-14V
Output Current	1.25A	2.50A	5.00A	8.33A
Output Power	15W	30W	60W	100W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)			
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load)			
PARD (20MHz)	< 100mVpp			
Hold-up Time	> 22ms @ 115Vac, > 110ms @ 230Vac			
INPUT				
Phase Input	Single Phase			
Input Voltage Range	85-264Vac (DC input range 120-375Vdc) ¹⁾			
Input Frequency	47-63Hz			
Input Current	< 0.37A @ 115Vac, < 0.22A @ 230Vac	< 0.70A @ 115Vac, < 0.42A @ 230Vac	< 1.35A @ 115Vac, < 0.80A @ 230Vac	< 2.50A @ 115Vac, < 1.50A @ 230Vac
Efficiency ²⁾ at 100% Load	> 84.0% @ 115Vac, > 83.0% @ 230Vac	> 85.0% @ 115Vac & 230Vac	> 86.0% @ 115Vac & 230Vac	> 85.5% @ 115Vac, > 87.5% @ 230Vac
Max Inrush Current (Cold Start)	< 30A @ 115Vac, < 65A @ 230Vac	< 40A @ 115Vac, < 80A @ 230Vac	< 50A @ 115Vac, < 100A @ 230Vac	< 100A @ 115Vac, No Damage @ 230Vac
Power Factor	Conform to EN 61000-3-2			
Leakage Current	< 1mA @ 240Vac			
MECHANICAL				
Case Cover	Plastic		Aluminium	
Dimensions (L x W x D)	100 x 32 x 100.6 mm (3.94" x 1.26" x 3.96")	100 x 32 x 100.6 mm (3.94" x 1.26" x 3.96")	121 x 32 x 120 mm (4.76" x 1.26" x 4.72")	121 x 50 x 118.7 mm (4.76" x 1.97" x 4.67")
Unit Weight	0.18 kg (0.40 lb)	0.20 kg (0.44 lb)	0.33 kg (0.73 lb)	0.64 kg (1.41 lb)
Cooling System	Convection			
Input Terminal	5 Pins (Rated 300V/15A)		3 Pins (Rated 300V/20A)	
Output Terminal	5 Pins (Rated 300V/15A)		2 Pins (Rated 300V/20A)	
Input / Output Wire	AWG 22-14	AWG 22-14	AWG 22-14	AWG 18-14
MTBF ³⁾	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs
ENVIRONMENT				
Operating Temperature	-20°C to +80°C			
Storage Temperature	-25°C to +85°C			
Power De-rating	> 50°C (2.5% / °C); > 70°C (4% / °C)			
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 2,000 m (0 to 6,560 ft)			

Notes

- 1) All models are certified for DC Input.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

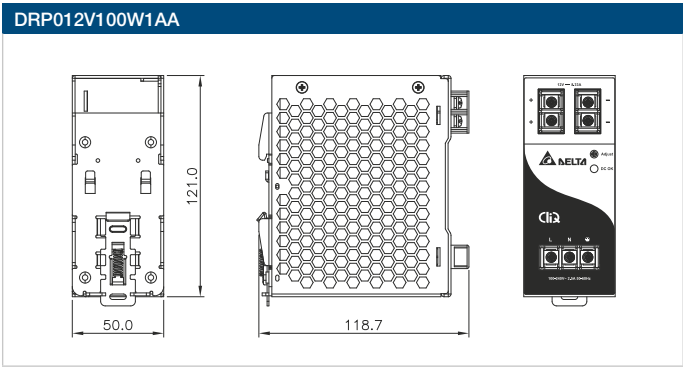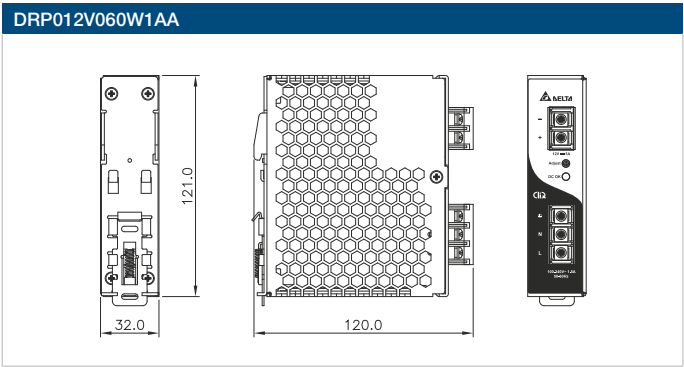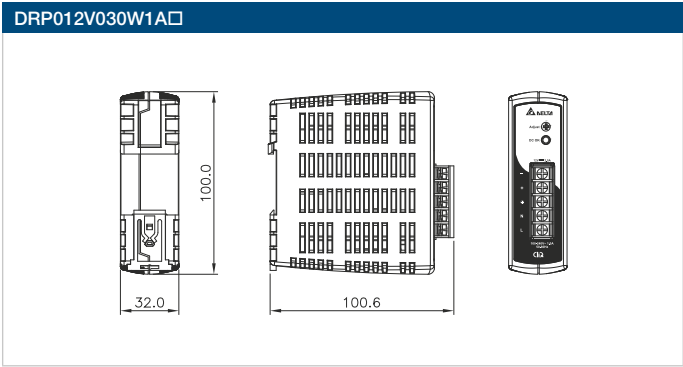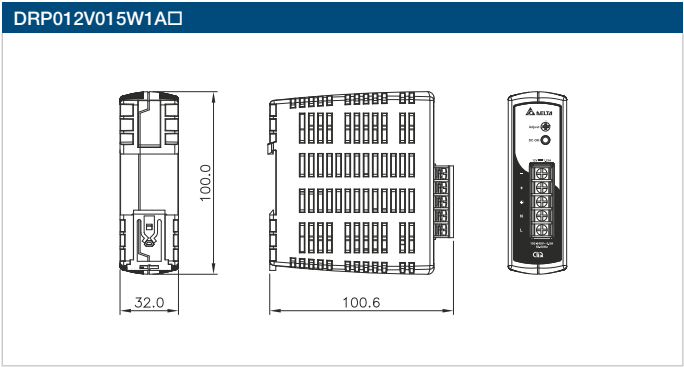

*Units in mm

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

CliQ DIN Rail Power Supply

24V Output



HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Power Boost of 150% for 3 seconds (480W: 200% for 2 seconds)
- Full corrosion resistant aluminium casing
- SEMI F47 Certified for selected models
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Conformal coating on PCBAs to protect against common dust and chemical pollutants (except DRP-24V48W1AZ and DRP024V060W1AZ)
- Hazardous Locations approval to ATEX and Class I, Div 2 (except DRP-24V48W1AZ and DRP024V060W1AZ)

GENERAL SPECIFICATIONS


OUTPUT	DRP-24V48W1AZ	DRP024V060W1AZ	DRP024V060W1AA	DRP024V120W1AA	DRP024V240W1AA	DRP024V480W1AA
Output Voltage	24V	24V	24V	24V	24V	24V
Output Voltage Range	22-26V	22-28V	22-28V	22-28V	22-28V	22-28V
Output Current	2.00A	2.50A	2.50A	5.00A	10.0A	20.0A
Output Power	48W	60W	60W	120W	240W	480W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load), <u>DRP-24V48W1AZ</u> : < 1% typ.					
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load)					
PARD (20MHz)	< 480mVpp	< 240mVpp				
Hold-up Time	> 10ms @ 115Vac, > 60ms @ 230Vac	> 20ms @ 115Vac, > 125ms @ 230Vac		> 35ms @ 115Vac, > 70ms @ 230Vac	> 20ms @ 115Vac & 230Vac	
INPUT						
Phase Input	Single Phase					
Input Voltage Range	85-264Vac (DC input range 120-375Vdc) ¹⁾					
Input Frequency	47-63Hz					
Input Current	< 1.40A @ 115Vac, < 0.70A @ 230Vac	< 1.10A @ 115Vac, < 0.70A @ 230Vac		< 1.40A @ 115Vac, < 0.80A @ 230Vac	< 2.90A @ 115Vac, < 1.50A @ 230Vac	< 5.70A @ 115Vac, < 2.80A @ 230Vac
Efficiency ²⁾ at 100% Load	> 87.0% @ 115Vac & 230Vac	> 86.0% @ 115Vac, > 87.0% @ 230Vac			> 89.0% @ 115Vac, > 91.0% @ 230Vac	> 85.0% @ 115Vac, > 88.0% @ 230Vac
Max Inrush Current (Cold Start)	< 28A @ 115Vac, < 56A @ 230Vac	< 40A @ 115Vac, < 80A @ 230Vac		< 80A @ 115Vac, < 150A @ 230Vac	< 40A @ 115Vac, < 100A @ 230Vac	< 50A @ 115Vac, < 150A @ 230Vac
Power Factor	Conform to EN 61000-3-2			> 0.98 @ 115Vac, > 0.87 @ 230Vac	> 0.96 @ 115Vac, > 0.90 @ 230Vac	> 0.97 @ 115Vac, > 0.95 @ 230Vac
Leakage Current	< 1mA @ 240Vac					< 1.25mA @ 240Vac
MECHANICAL						
Case Cover	Plastic		Aluminium			
Dimensions (L x W x D)	100 x 32 x 100.6 mm (3.94" x 1.26" x 3.96")	120.6 x 32 x 113 mm (4.75" x 1.26" x 4.45")	121 x 32 x 120 mm (4.76" x 1.26" x 4.72")	121 x 50 x 118.7 mm (4.76" x 1.97" x 4.67")	121 x 85 x 118.5 mm (4.76" x 3.35" x 4.67")	121 x 160 x 118.5 mm (4.76" x 6.30" x 4.67")
Unit Weight	0.22 kg (0.49 lb)	0.33 kg (0.73 lb)	0.37 kg (0.82 lb)	0.54 kg (1.19 lb)	1.04 kg (2.29 lb)	1.80 kg (3.97 lb)
Cooling System	Convection					
Input Terminal	5 Pins (Rated 300V/15A)	3 Pins (Rated 300V/20A)				
Output Terminal	5 Pins (Rated 300V/15A)	2 Pins (Rated 300V/20A)				4 Pins (Rated 300V/20A)
Input / Output Wire	AWG 22-14	AWG 22-14	AWG 22-14	AWG 22-14	AWG 22-14	I/P: AWG 16-14, O/P: AWG 12-10
MTBF ³⁾	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs	> 300,000 hrs	> 300,000 hrs
ENVIRONMENT						
Operating Temperature	-20°C to +70°C	-20°C to +80°C				
Storage Temperature	-25°C to +85°C					
Power De-rating	< -10°C to -20°C (1% / °C); < 0°C to -10°C (2% / °C); > 50°C (2.5% / °C)	-20°C to -10°C: 80% Load; < 0°C (2% / °C); > 50°C (2.5% / °C)	< 0°C to -20°C (1% / °C); > 50°C (2.5% / °C)	> 50°C (2.5% / °C)	> 50°C (2.5% / °C); > 70°C (4% / °C)	> 50°C (2.5% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)					
Operating Altitude	0 to 2,000 m (0 to 6,560 ft)					

Notes


- 1) All models are certified for DC Input except DRP-24V48W1AZ which still fulfills the test conditions of this range. DC input safety approval can be obtained upon request.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS


DRP-24V48W1AZ

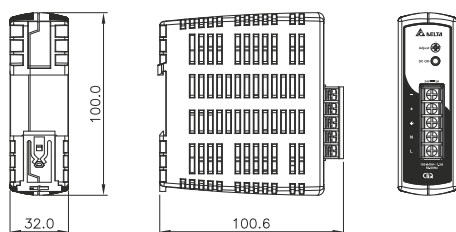


DRP024V060W1AZ

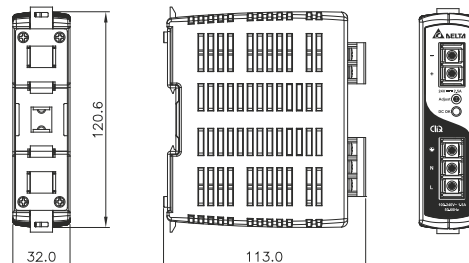


DRP024V060W1AA

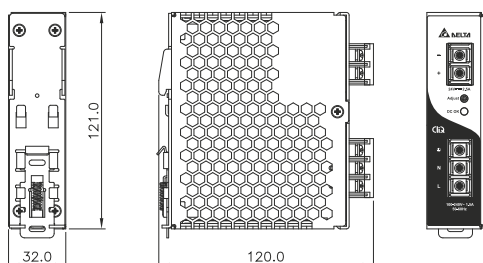


DRP024V120W1AA

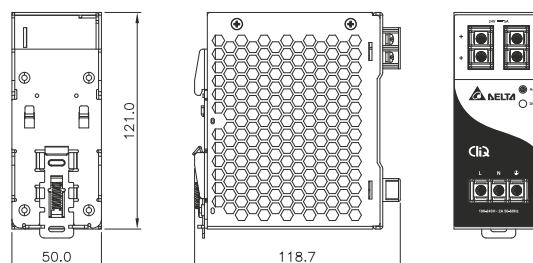

DRP024V240W1AA

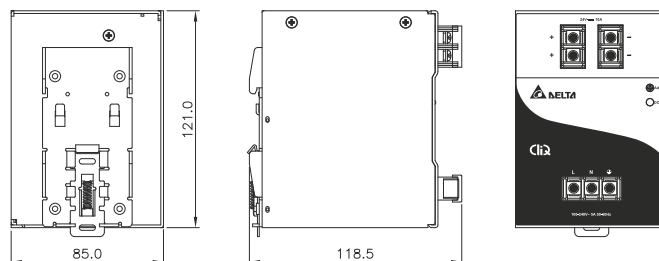

DRP024V480W1AA

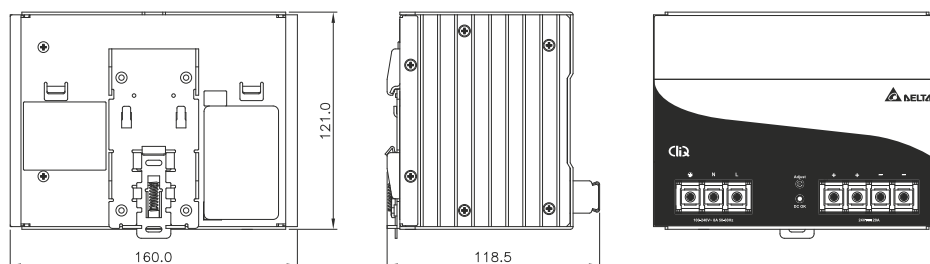

*Units in mm

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

CliQ II DIN Rail Power Supply

24V Output



HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- High Efficiency > 90.0% @ 230Vac
- Power Boost of 150% for 5 seconds (480W: 200% for 2 seconds)
- Full corrosion resistant aluminium casing
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Extreme low temperature cold start at -40°C
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Hazardous Locations approval to ATEX and Class I, Div 2





GENERAL SPECIFICATIONS

OUTPUT	DRP024V060W1B□	DRP024V120W1B□	DRP024V240W1B□	DRP024V480W1B□
Output Voltage	24V	24V	24V	24V
Output Voltage Range	24-28V	24-28V	24-28V	24-28V
Output Current	2.50A	5.00A	10.0A	20.0A
Output Power	60W	120W	240W	480W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)			
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load)			
PARD (20MHz)	< 150mVpp			
Hold-up Time	> 20ms @ 115Vac, > 125ms @ 230Vac	> 20ms @ 115Vac, > 115ms @ 230Vac	> 20ms @ 115Vac & 230Vac	
INPUT				
Phase Input	Single Phase			
Input Voltage Range	85-264Vac (DC input range 120-375Vdc) ¹⁾			
Input Frequency	47-63Hz			
Input Current	< 1.40A @ 115Vac, < 0.80A @ 230Vac	< 2.20A @ 115Vac, < 1.10A @ 230Vac	< 2.50A @ 115Vac, < 1.30A @ 230Vac	< 5.00A @ 115Vac, < 3.00A @ 230Vac
Efficiency ²⁾ at 100% Load	> 90.0% @ 115Vac & 230Vac	> 89.0% @ 115Vac, > 90.0% @ 230Vac	> 90.0% @ 115Vac, > 92.0% @ 230Vac	> 91.0% @ 115Vac, > 92.0% @ 230Vac
Max Inrush Current (Cold Start)	< 20A @ 115Vac, < 35A @ 230Vac	< 35A @ 115Vac & 230Vac		
Power Factor	Conform to EN 61000-3-2		> 0.96 @ 115Vac, > 0.90 @ 230Vac	> 0.96 @ 115Vac, > 0.95 @ 230Vac
Leakage Current	< 1mA @ 240Vac			< 3mA @ 240Vac
MECHANICAL				
Case Cover	Aluminium			
Dimensions (L x W x D)	121 x 32 x 125 mm (4.76" x 1.26" x 4.92")	121 x 50 x 123.1 mm (4.76" x 1.97" x 4.85")	121 x 85 x 124.1 mm (4.76" x 3.35" x 4.89")	121 x 144 x 118.6 mm (4.76" x 5.67" x 4.67")
Unit Weight	0.37 kg (0.82 lb)	0.72 kg (1.59 lb)	1.10 kg (2.43 lb)	1.37 kg (3.02 lb)
Cooling System	Convection			
Input Terminal	Pluggable Connector 3 Pins (Rated 300V/15A)			3 Pins (Rated 300V/30A)
Output Terminal	Pluggable Connector 2 Pins (Rated 300V/15A)	Pluggable Connector 4 Pins (Rated 300V/15A)		4 Pins (Rated 300V/30A)
Input / Output Wire	AWG 22-12	AWG 20-12	AWG 16-12	I/P: AWG 18-10, O/P: AWG 12-10
MTBF ³⁾	> 800,000 hrs	> 800,000 hrs	> 500,000 hrs	> 500,000 hrs
ENVIRONMENT				
Operating Temperature	-25°C to +80°C			-25°C to +75°C
Storage Temperature	-40°C to +85°C			
Power De-rating	> 50°C (2.5% / °C)			> 50°C (2.5% / °C); > 70°C (5% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 2,500 m (0 to 8,200 ft)			

Notes

- 1) All models fulfill the test conditions for this range. DC input safety approval can be obtained upon request. While DRP024V060W1B□ is also certified for DC Input.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

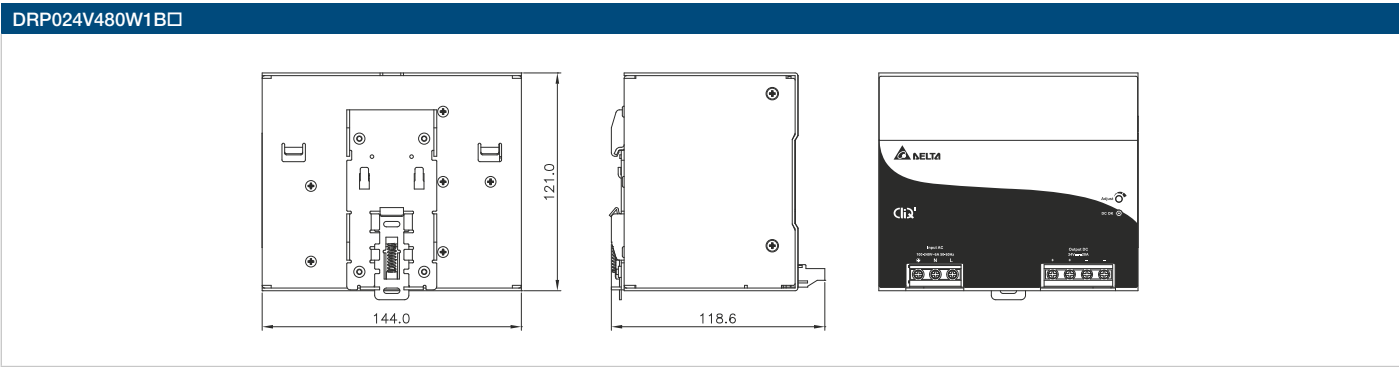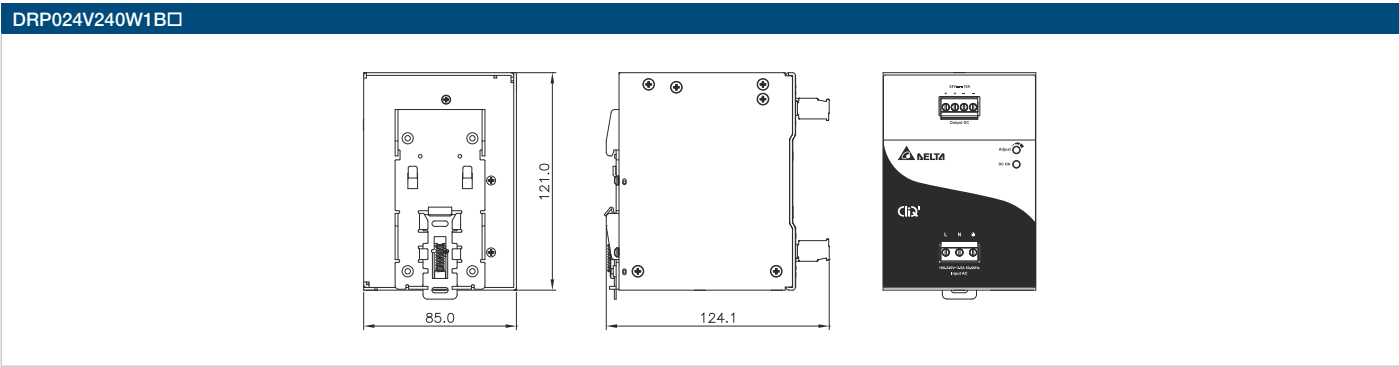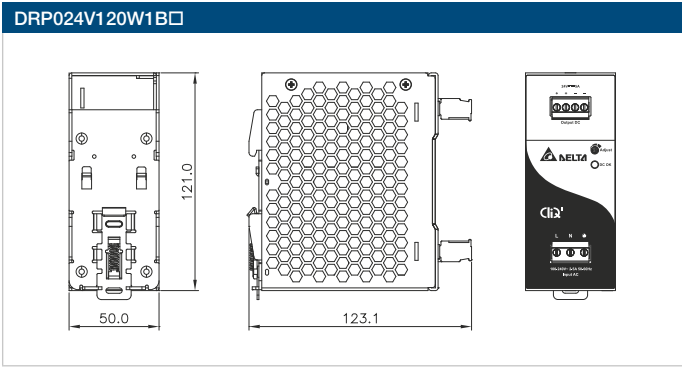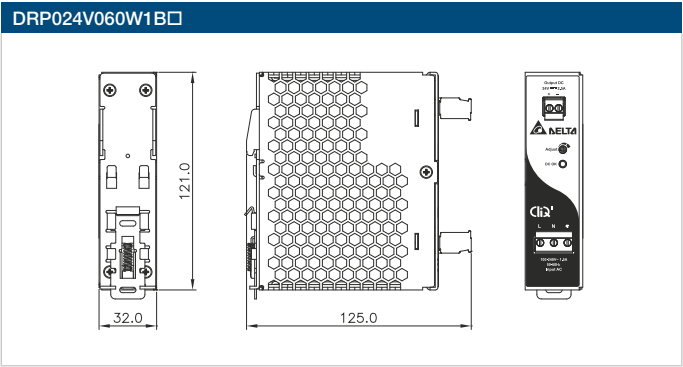

*Units in mm

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

CliQ II DIN Rail Power Supply

24V Output NEC Class 2





HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- UL 1310 safety approval
- NEC Class 2 and Limited Power Source (LPS) approvals
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Hazardous Locations approval to ATEX and Class I, Div 2 (DRP024V060W1NY)

GENERAL SPECIFICATIONS

OUTPUT	DRP024V060W1N□	DRP-24V100W1NN
Output Voltage	24V	24V
Output Voltage Range	24-28V	22-24V
Output Current	2.50A	3.80A
Output Power	60W	91.2W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)	
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load); DRP-24V100W1NN: < 1% typ. (-25°C to +25°C), < 2% typ. (+25°C to +50°C)	
PARD (20MHz)	< 240mVpp	< 150mVpp
Hold-up Time	> 20ms @ 115Vac, > 125ms @ 230Vac	> 20ms @ 115Vac, > 30ms @ 230Vac
INPUT		
Phase Input	Single Phase	
Input Voltage Range	85-264Vac (DC input range 120-375Vdc) ¹⁾	
Input Frequency	47-63Hz	
Input Current	< 1.50A @ 115Vac, < 0.80A @ 230Vac	< 1.00A @ 115Vac, < 0.53A @ 230Vac
Efficiency ²⁾ at 100% Load	> 88.0% @ 115Vac, > 89.0% @ 230Vac	
Max Inrush Current (Cold Start)	< 40A @ 115Vac, < 80A @ 230Vac	< 30A @ 115Vac, < 60A @ 230Vac
Power Factor	Conform to EN 61000-3-2 > 0.99 @ 115Vac, > 0.94 @ 230Vac	
Leakage Current	< 0.5mA @ 240Vac	
MECHANICAL		
Case Cover	Plastic	Aluminium
Dimensions (L x W x D)	120.6 x 32 x 119.3 mm (4.75" x 1.26" x 4.70")	124 x 40 x 124 mm (4.88" x 1.57" x 4.88")
Unit Weight	0.33 kg (0.73 lb)	0.60 kg (1.32 lb)
Cooling System	Convection	
Input Terminal	3 Pins (Rated 300V/30A)	3 Pins (Rated 600V/35A)
Output Terminal	2 Pins (Rated 300V/30A)	4 Pins (Rated 300V/28A)
Input / Output Wire	AWG 22-10	AWG 18-12
MTBF ³⁾	> 800,000 hrs	> 800,000 hrs
ENVIRONMENT		
Operating Temperature	-25°C to +80°C	
Storage Temperature	-40°C to +85°C	
Power De-rating	> 50°C (2.5% / °C); > 70°C (4% / °C)	
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	0 to 2,500 m (0 to 8,200 ft)	

MECHANICAL DRAWINGS

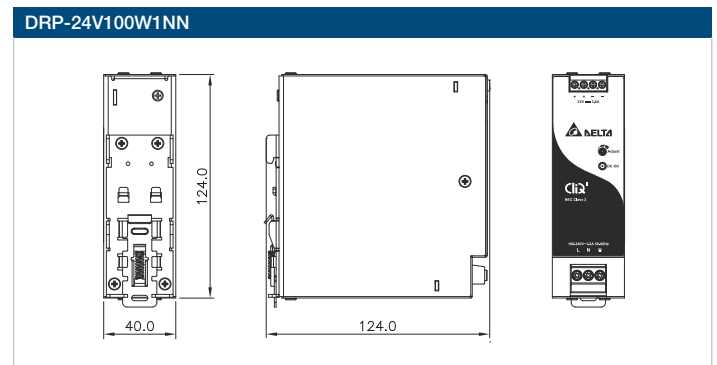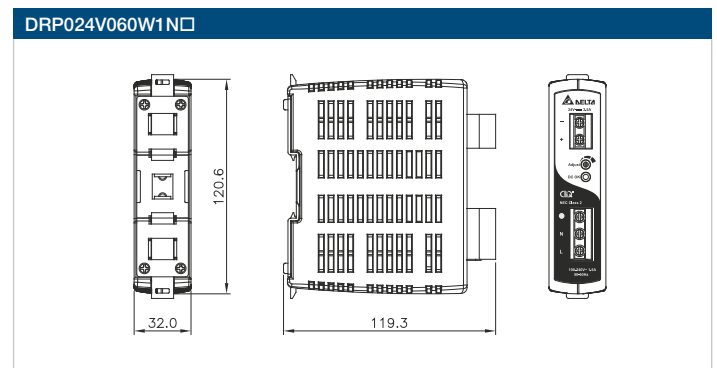

*Units in mm

Notes

- 1) All models fulfill the test conditions for DC Input. DC input safety approval can be obtained upon request.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

24V Output





HIGHLIGHTS & FEATURES

- Designed for single phase input 180-305Vac (for L-N) or 2 of 3-Phase system 2 x 180-550Vac (for L-L) or 254-780Vdc
- Compact and corrosion resistant aluminium casing
- High Efficiency > 90.0%
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Wide operating temperature range from -30°C to +70°C
- Built-in DC OK contact
- Conformal coating on PCBAs to protect against common dust and chemical pollutants

GENERAL SPECIFICATIONS

OUTPUT	DRP-24V120W2BN	DRP-24V240W2BN
Output Voltage	24V	24V
Output Voltage Range	24-28V	24-28V
Output Current	5.00A	10.0A
Output Power	120W	240W
Line Regulation	< 0.5% typ. (@ 200-550Vac input, 100% load)	
Load Regulation	< 1% typ. (@ 200-550Vac input, 0-100% load)	
PARD (20MHz)	< 150mVpp	
Hold-up Time	> 10ms @ 2 x 230Vac, > 50ms @ 2 x 400Vac	> 18ms @ 2 x 230Vac, > 30ms @ 2 x 400Vac
INPUT		
Phase Input	Single Phase or Two Phase	
Input Voltage Range	2 x 180-550Vac or 180-305Vac (Single Phase) (DC input range 254-780Vdc) ¹⁾	
Input Frequency	47-63Hz	
Input Current	< 1.20A @ 2 x 230Vac, < 0.65A @ 2 x 400Vac	< 2.00A @ 2 x 230Vac, < 1.00A @ 2 x 400Vac
Efficiency ²⁾ at 100% Load	> 90.0% @ 2 x 400Vac	
Max Inrush Current (Cold Start)	< 50A @ 2 x 200Vac & 500Vac	
Power Factor	Conform to EN 61000-3-2	> 0.84 @ 2 x 230Vac & 400Vac
Leakage Current	< 3.5mA @ 500Vac	
MECHANICAL		
Case Cover	Aluminium	
Dimensions (L x W x D)	124 x 40 x 117 mm (4.88" x 1.57" x 4.61")	124 x 60 x 117 mm (4.88" x 2.36" x 4.61")
Unit Weight	0.62 kg (1.37 lb)	0.81 kg (1.79 lb)
Cooling System	Convection	
Input Terminal	3 Pins (Rated 600V/35A)	
Output Terminal	4 Pins (Rated 300V/28A)	6 Pins (Rated 300V/28A)
Input / Output Wire	I/P: AWG 18-8, O/P: AWG 18-12	I/P: AWG 18-8, O/P: AWG 16-12
MTBF ³⁾	> 800,000 hrs	> 500,000 hrs
ENVIRONMENT		
Operating Temperature	-30°C to +70°C	
Storage Temperature	-40°C to +85°C	
Power De-rating	> 60°C (4% / °C)	> 50°C (2.25% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	Industrial Application: 0 to 2,000 m (0 to 6,560 ft); ITE Application: 0 to 2,500 m (0 to 8,200 ft)	

MECHANICAL DRAWINGS

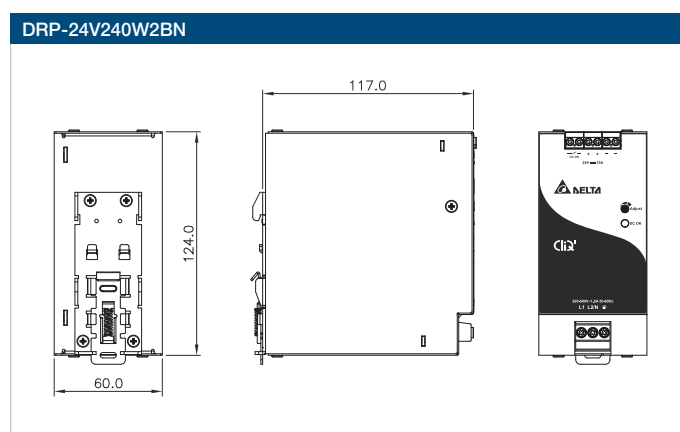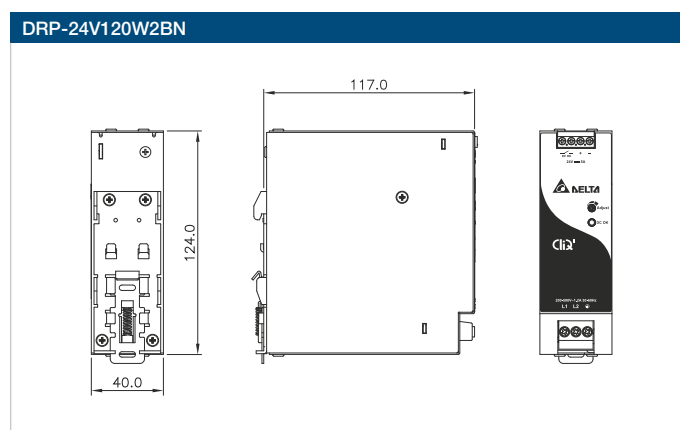

*Units in mm

Notes

- 1) All models are certified for DC Input.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

CliQ II DIN Rail Power Supply

24V Output



HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Power Boost of 150% for 5 seconds (480W: 200% for 2 seconds)
- Full corrosion resistant aluminium casing
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Extreme low temperature cold start at -40°C
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Hazardous Locations approval to ATEX and Class I, Div 2 (except DRP024V960W3BN)






GENERAL SPECIFICATIONS

OUTPUT	DRP024V060W3B□	DRP024V120W3B□	DRP024V240W3B□	DRP024V480W3B□	DRP024V960W3BN
Output Voltage	24V	24V	24V	24V	24V
Output Voltage Range	24-28V	24-28V	24-28V	24-28V	24-28V
Output Current	2.50A	5.00A	10.0A	20.0A	40.0A
Output Power	60W	120W	240W	480W	960W
Line Regulation	< 0.5% typ. (@ 320-600Vac input, 100% load)				
Load Regulation	< 1% typ. (@ 320-600Vac input, 0-100% load)				
PARD (20MHz)	< 150mVpp				< 240mVpp
Hold-up Time	> 20ms @ 3 x 400Vac, > 40ms @ 3 x 500Vac			> 20ms @ 3 x 400Vac & 500Vac	
INPUT					
Phase Input	Two Phase or Three Phase				
Input Voltage Range (Does not exceed 600Vac)	3 x 320-600Vac or 2 x 360-600Vac (DC input range 450-800Vdc) ¹⁾				3 x 320-600Vac or 2 x 380-600Vac (DC input range 450-800Vdc) ¹⁾
Input Frequency	47-63Hz				
Input Current	< 0.30A/Phase @ 400Vac, < 0.25A/Phase @ 500Vac	< 0.50A/Phase @ 400Vac, < 0.40A/Phase @ 500Vac	< 0.75A/Phase @ 400Vac, < 0.65A/Phase @ 500Vac	< 1.00A/Phase @ 400Vac, < 0.75A/Phase @ 500Vac	< 1.70A/Phase @ 400Vac, < 1.40A/Phase @ 500Vac
Efficiency ²⁾ at 100% Load	> 86.0% @ 3 x 400Vac & 500Vac	> 88.0% @ 3 x 400Vac & 500Vac	> 92.0% @ 3 x 400Vac & 500Vac	> 91.0% @ 3 x 400Vac & 500Vac	> 92.0% @ 3 x 400Vac & 500Vac
Max Inrush Current (Cold Start) ³⁾	< 30A @ 3 x 400Vac & 500Vac	< 30A @ 3 x 400Vac & 500Vac	< 40A @ 3 x 400Vac & 500Vac	< 50A @ 3 x 400Vac & 500Vac	< 60A @ 3 x 400Vac & 500Vac
Power Factor		Conform to EN 61000-3-2		> 0.95 @ 3 x 400Vac, > 0.94 @ 3 x 500Vac	
Leakage Current	< 3.5mA @ 500Vac				
MECHANICAL					
Case Cover	Aluminium				
Dimensions (L x W x D)	121 x 50 x 117.3 mm (4.76" x 1.97" x 4.62")	121 x 50 x 117.3 mm (4.76" x 1.97" x 4.62")	121 x 70 x 117.3 mm (4.76" x 2.76" x 4.62")	121 x 140 x 117.3 mm (4.76" x 5.51" x 4.62")	121 x 255 x 117.3 mm (4.76" x 10.0" x 4.62")
Unit Weight	0.66 kg (1.46 lb)	0.66 kg (1.46 lb)	0.89 kg (1.96 lb)	1.35 kg (2.98 lb)	2.60 kg (5.73 lb)
Cooling System	Convection				
Input Terminal	4 Pins (Rated 600V/35A)				
Output Terminal	4 Pins (Rated 300V/28A)			4 Pins (Rated 300V/30A)	6 Pins (Rated 300V/30A)
Input / Output Wire	AWG 18-12	AWG 18-12	I/P: AWG 18-12, O/P: AWG 16-12	I/P: AWG 18-8, O/P: AWG 12-10	I/P: AWG 18-8, O/P: AWG 12-10
MTBF ⁴⁾	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs	> 300,000 hrs
ENVIRONMENT					
Operating Temperature	-25°C to +80°C				-25°C to +65°C
Storage Temperature	-40°C to +85°C				
Power De-rating	> 50°C (2.5% / °C); > 70°C (5% / °C)				> 50°C (2.5% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	Industrial Application: 0 to 2,000 m (0 to 6,560 ft); ITE Application: 0 to 2,500 m (0 to 8,200 ft)				

Notes

- 1) All models fulfill the test conditions for this range. DC input safety approval can be obtained upon request. While DRP024V480W3B□ and DRP024V960W3B□ are also certified for DC Input.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) AC Source capability up to 3kVA.
- 4) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 400Vac, O/P: 100% load) for vertical mounting orientation.
- 5) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

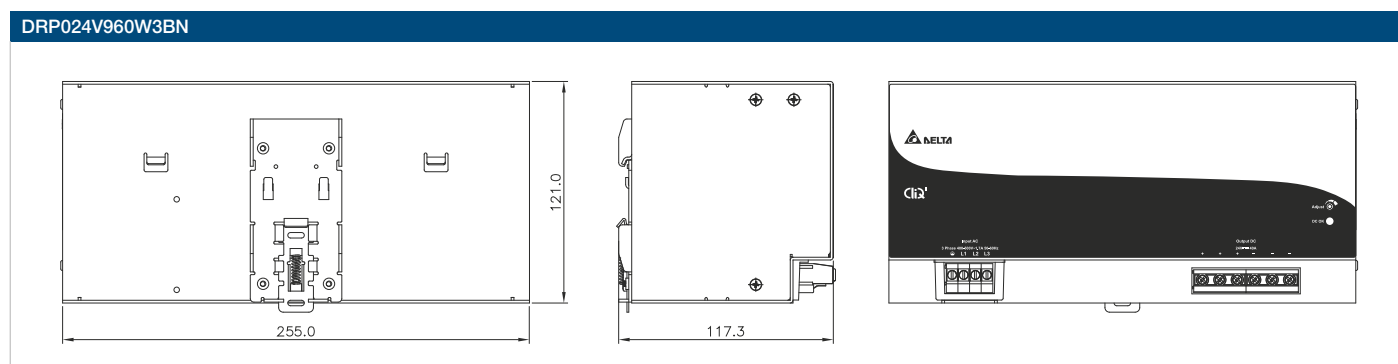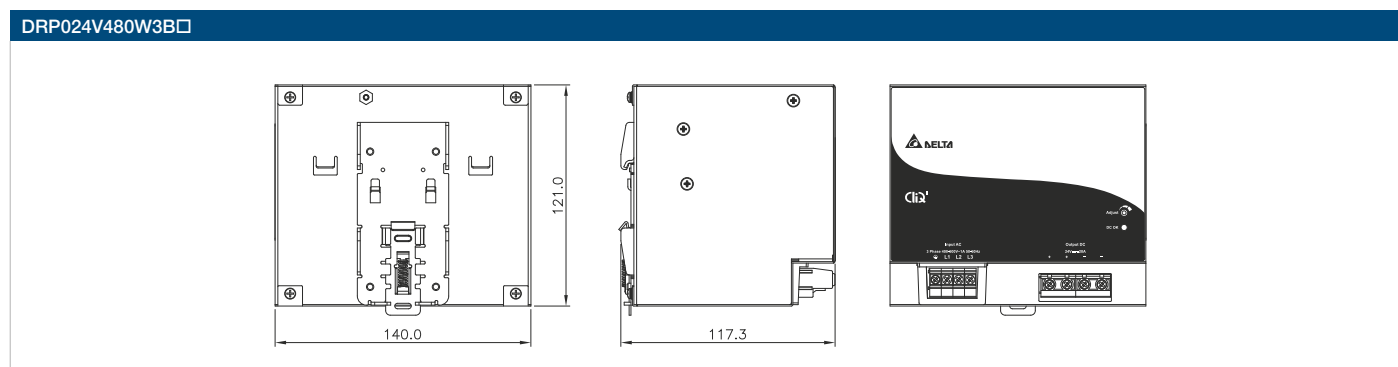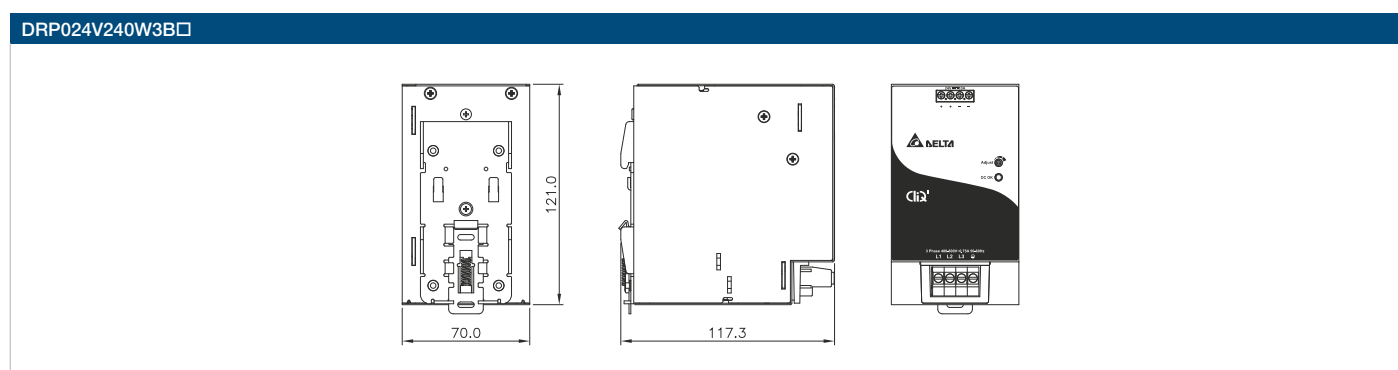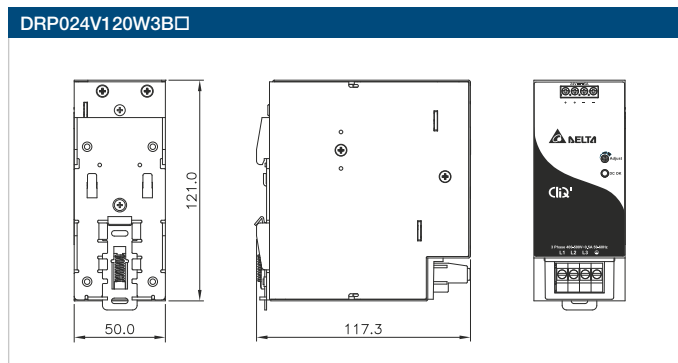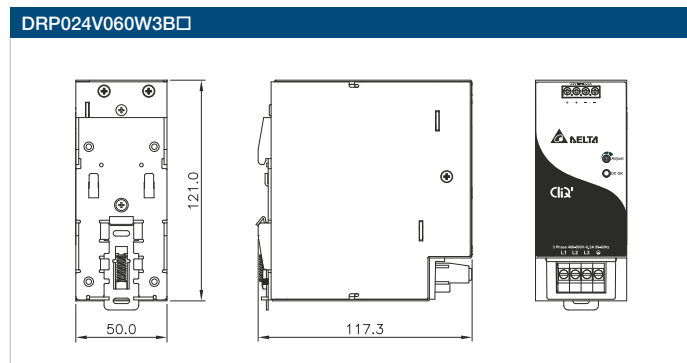

*Units in mm

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

CliQ II DIN Rail Power Supply

48V Output



HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- High Efficiency > 91.0% @ 230Vac
- Power Boost of 150% for 5 seconds
- Full corrosion resistant aluminium casing
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Extreme low temperature cold start at -40°C
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Hazardous Locations approval to ATEX and Class I, Div 2





GENERAL SPECIFICATIONS

OUTPUT	DRP048V060W1B□	DRP048V120W1B□	DRP048V240W1B□	DRP048V480W1B□
Output Voltage	48V	48V	48V	48V
Output Voltage Range	48-56V	48-56V	48-56V	48-56V
Output Current	1.25A	2.50A	5.00A	10.0A
Output Power	60W	120W	240W	480W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)			
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load)			
PARD (20MHz)	< 200mVpp			
Hold-up Time	> 20ms @ 115Vac, > 125ms @ 230Vac	> 20ms @ 115Vac, > 50ms @ 230Vac	> 20ms @ 115Vac & 230Vac	
INPUT				
Phase Input	Single Phase			
Input Voltage Range	85-264Vac (DC input range 120-375Vdc) ¹⁾			
Input Frequency	47-63Hz			
Input Current	< 1.40A @ 115Vac, < 0.80A @ 230Vac	< 2.20A @ 115Vac, < 1.10A @ 230Vac	< 2.50A @ 115Vac, < 1.30A @ 230Vac	< 5.00A @ 115Vac, < 3.00A @ 230Vac
Efficiency ²⁾ at 100% Load	> 91.0% @ 115Vac, > 92.0% @ 230Vac	> 90.0% @ 115Vac, > 91.0% @ 230Vac	> 90.0% @ 115Vac, > 92.0% @ 230Vac	> 91.0% @ 115Vac, > 93.0% @ 230Vac
Max Inrush Current (Cold Start)	< 20A @ 115Vac, < 35A @ 230Vac	< 35A @ 115Vac & 230Vac		
Power Factor	Conform to EN 61000-3-2	> 0.99 @ 115Vac, > 0.93 @ 230Vac	> 0.96 @ 115Vac, > 0.90 @ 230Vac	
Leakage Current	< 1mA @ 240Vac			< 3mA @ 240Vac
MECHANICAL				
Case Cover	Aluminium			
Dimensions (L x W x D)	121 x 32 x 125 mm (4.76" x 1.26" x 4.92")	121 x 50 x 123.1 mm (4.76" x 1.97" x 4.85")	121 x 85 x 124.1 mm (4.76" x 3.35" x 4.86")	121 x 144 x 118.6 mm (4.76" x 5.67" x 4.67")
Unit Weight	0.38 kg (0.84 lb)	0.72 kg (1.59 lb)	0.96 kg (2.12 lb)	1.37 kg (3.02 lb)
Cooling System	Convection			
Input Terminal	Pluggable Connector 3 Pins (Rated 300V/15A)			3 Pins (Rated 300V/30A)
Output Terminal	Pluggable Connector 2 Pins (Rated 300V/15A)	Pluggable Connector 4 Pins (Rated 300V/15A)		4 Pins (Rated 300V/30A)
Input / Output Wire	AWG 22-12	AWG 20-12	AWG 20-12	I/P: AWG 18-10, O/P: AWG 16-10
MTBF ³⁾	> 800,000 hrs	> 800,000 hrs	> 500,000 hrs	> 500,000 hrs
ENVIRONMENT				
Operating Temperature	-25°C to +80°C			-25°C to +75°C
Storage Temperature	-40°C to +85°C			
Power De-rating	> 50°C (2.5% / °C)			> 50°C (2.5% / °C); > 70°C (5% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 2,500 m (0 to 8,200 ft)			

Notes

- 1) All models fulfill the test conditions for DC Input. DC input safety approval can be obtained upon request.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

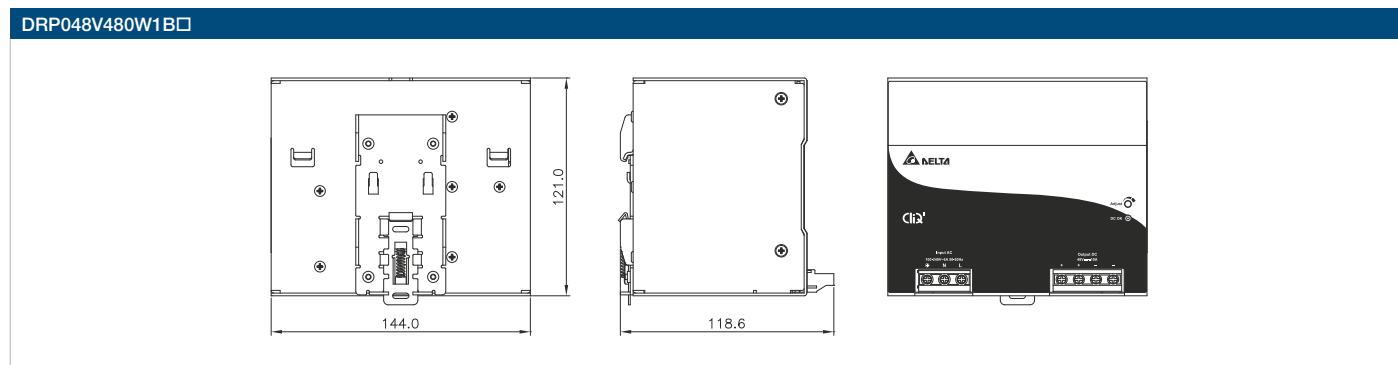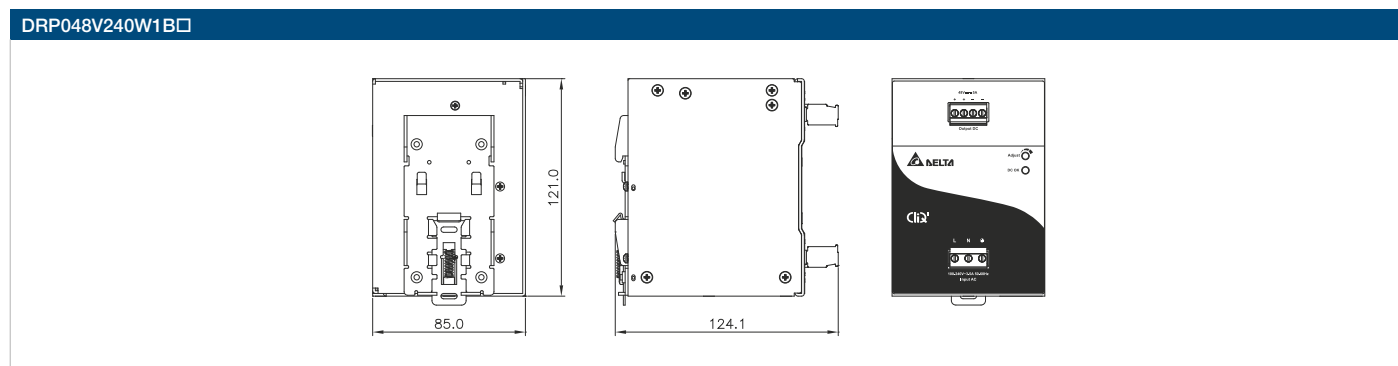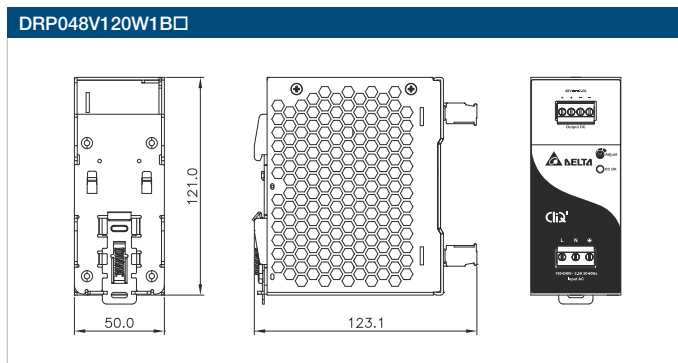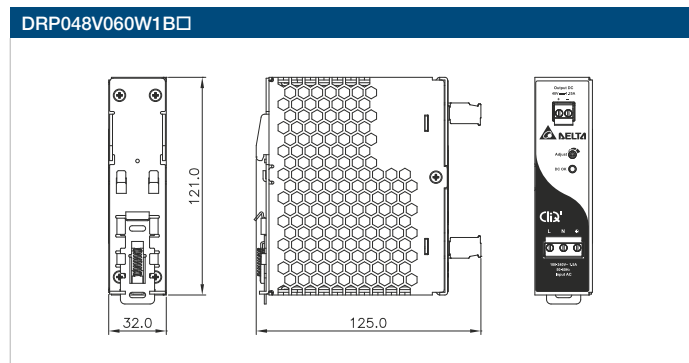

*Units in mm

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

CliQ M DIN Rail Power Supply

24V Output



HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- High power density in corrosion resistant aluminium casing
- Power Boost of 150% for 5 seconds
- Advanced Power Boost (APB) – large reserve output current for fuse tripping
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Built-in DC OK contact and LED indicator for DC OK/ Over Load
- Conformal coating on PCBAs to protect against common dust and chemical pollutants




GENERAL SPECIFICATIONS

COMING SOON		COMING SOON	
OUTPUT	DRM-24V80W1PN	DRM-24V120W1PN	DRM-24V240W1PN
Output Voltage	24V	24V	24V
Output Voltage Range	24-28V	24-28V	24-28V
Output Current	3.40-3.00A	5.00-4.50A	10.0-9.00A
Output Power	81.6W	120W	240W
Line Regulation	10mV (@ 85-264Vac input, 100% load)	20mV (@ 85-264Vac input, 100% load)	10mV (@ 85-264Vac input, 100% load)
Load Regulation	100mV (@ 85-264Vac input, 0-100% load)		
PARD (20MHz)	< 50mVpp		
Hold-up Time	> 35ms @ 120Vac, > 70ms @ 230Vac	> 34ms @ 120Vac, > 65ms @ 230Vac	> 27ms @ 120Vac, > 28ms @ 230Vac
INPUT			
Phase Input	Single Phase		
Input Voltage Range	85-276Vac (DC input range 88-375Vdc) ¹⁾	85-264Vac (DC input range 88-375Vdc) ¹⁾	85-276Vac (DC input range 88-375Vdc) ¹⁾
Input Frequency	47-63Hz		
Input Current	< 0.90A @ 120Vac, < 0.60A @ 230Vac	< 1.12A @ 120Vac, < 0.62A @ 230Vac	< 2.22A @ 120Vac, < 1.22A @ 230Vac
Efficiency ²⁾ at 100% Load	> 88.7% @ 120Vac, > 90.0% @ 230Vac	> 91.6% @ 120Vac, > 92.7% @ 230Vac	> 92.6% @ 120Vac, > 93.5% @ 230Vac
Max Inrush Current (Cold Start)	< 6A @ 120Vac & 230Vac	< 15A @ 120Vac & 230Vac	< 10A @ 120Vac & 230Vac
Power Factor	> 0.95 @ 120Vac, > 0.80 @ 230Vac	> 0.99 @ 120Vac, > 0.93 @ 230Vac	> 0.98 @ 120Vac, > 0.92 @ 230Vac
Leakage Current (264Vac, 50Hz)	TT/TN < 0.35mA IT < 0.80mA	< 0.45mA < 1.08mA	< 0.74mA < 1.29mA
MECHANICAL			
Case Cover	Aluminium		
Dimensions (L x W x D)	124 x 32 x 102 mm (4.88" x 1.26" x 4.02")	124 x 40 x 117 mm (4.88" x 1.57" x 4.61")	124 x 60 x 117 mm (4.88" x 2.36" x 4.61")
Unit Weight	0.49 kg (1.08 lb)	0.63 kg (1.39 lb)	0.95 kg (2.09 lb)
Cooling System	Convection		
Input / Output Terminal	I/P: 3 Pins (Rated 300V/35A), O/P: 6 Pins (Rated 300V/8A)	I/P: 3 Pins (Rated 300V/35A), O/P: 6 Pins (Rated 300V/28A)	
Input / Output Wire	I/P: AWG 20-8, O/P: AWG 22-16	I/P: AWG 18-8, O/P: AWG 22-12	I/P: AWG 18-8, O/P: AWG 16-12
MTBF ³⁾	> 2,061,000 hrs	> 1,831,000 hrs	> 1,476,000 hrs
ENVIRONMENT			
Operating Temperature	-25°C to +70°C		
Storage Temperature	-40°C to +85°C		
Power De-rating	> 60°C (2.5% / °C)		
Operating Humidity	5 to 95% RH (Non-Condensing)		
Operating Altitude	0 to 2,500 m (0 to 8,200 ft)		

Notes

- 1) All models are certified for DC Input.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

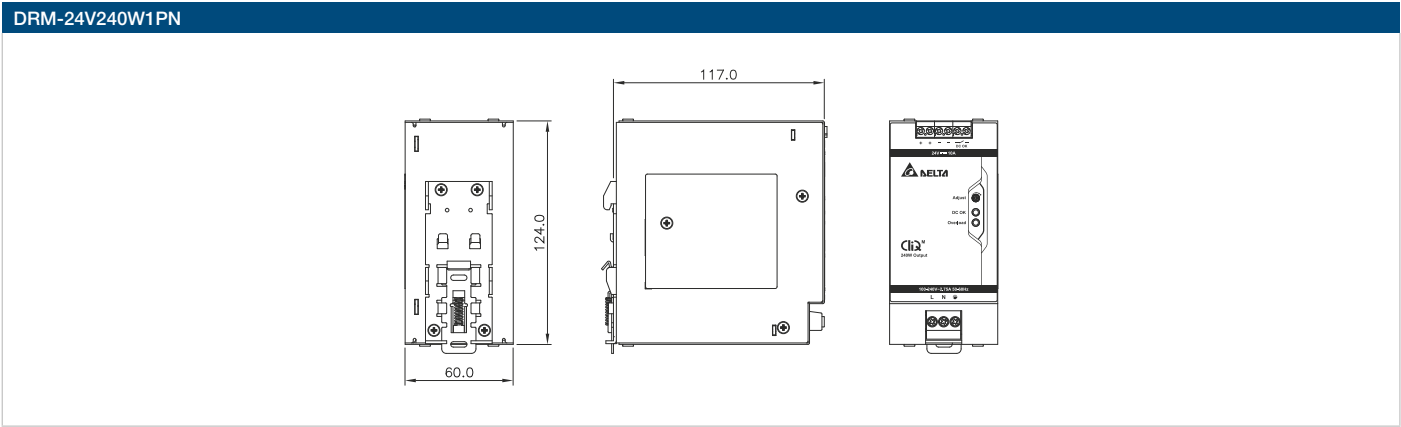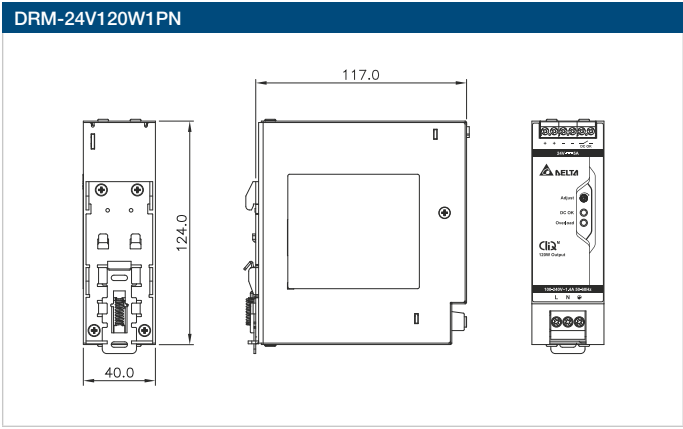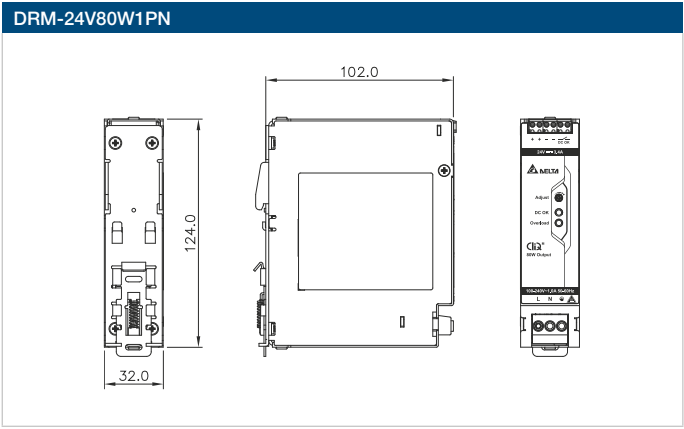

*Units in mm

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

Lyte DIN Rail Power Supply

24V Output



LYTE

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Built-in constant current circuit
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Built-in DC OK contact (for DRL-24V120W1AR)
- Overvoltage / Overcurrent / Over Temperature / Short Circuit Protections
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and UL 508 (Industrial standard)



GENERAL SPECIFICATIONS

	COMING SOON	COMING SOON
OUTPUT	DRL-24V120W1AN	DRL-24V120W1AR
Output Voltage	24V	24V
Output Voltage Range	22-28V	22-28V
Output Current	5.00A	5.00A
Output Power	120W	120W
Line Regulation	± 0.5%	
Load Regulation	± 1%	
PARD (20MHz)	< 120mVpp	
Hold-up Time	20ms typ. @ 115Vac, 90ms typ. @ 230Vac	
INPUT		
Phase Input	Single Phase	
Input Voltage Range	85-264Vac	
Input Frequency	47-63Hz	
Input Current	< 2.20A @ 115Vac, < 1.20A @ 230Vac	
Efficiency ¹⁾ at 100% Load	> 88.0% @ 115Vac, > 90.0% @ 230Vac	
Max Inrush Current (Cold Start)	20A typ. @ 115Vac, 40A typ. @ 230Vac	
Power Factor	Conform to EN 61000-3-2	
Leakage Current	< 0.25mA @ 240Vac	
MECHANICAL		
Case Cover / Chassis	SGCC / Aluminium	
Dimensions (L x W x D)	123.6 x 40 x 117.6 mm (4.87" x 1.57" x 4.63")	123.6 x 40 x 117.6 mm (4.87" x 1.57" x 4.63")
Unit Weight	0.54 kg (1.19 lb)	0.54 kg (1.19 lb)
Cooling System	Convection	
Input Terminal	3 Pins (Rated 300V/28A)	
Output Terminal	4 Pins (Rated 300V/28A)	6 Pins (Rated 300V/28A)
Input / Output Wire	I/P: AWG 18-8, O/P: AWG 24-12	I/P: AWG 18-8, O/P: AWG 24-12
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT		
Operating Temperature	-20°C to +70°C	
Storage Temperature	-40°C to +85°C	
Power De-rating	< -10°C (2% / °C), > 50°C (2.5% / °C) @ 230Vac < -10°C (2% / °C), > 40°C (1.67% / °C) @ 115Vac	
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	Industrial Application: 0 to 2,000 m (0 to 6,560 ft) ITE Application: 0 to 5,000 m (0 to 16,400 ft)	

Notes

- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

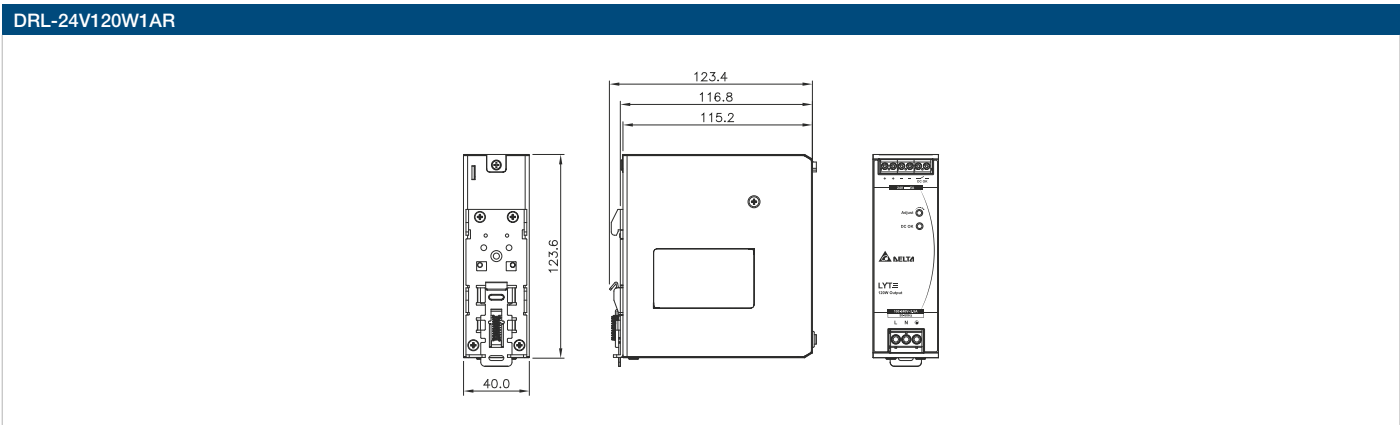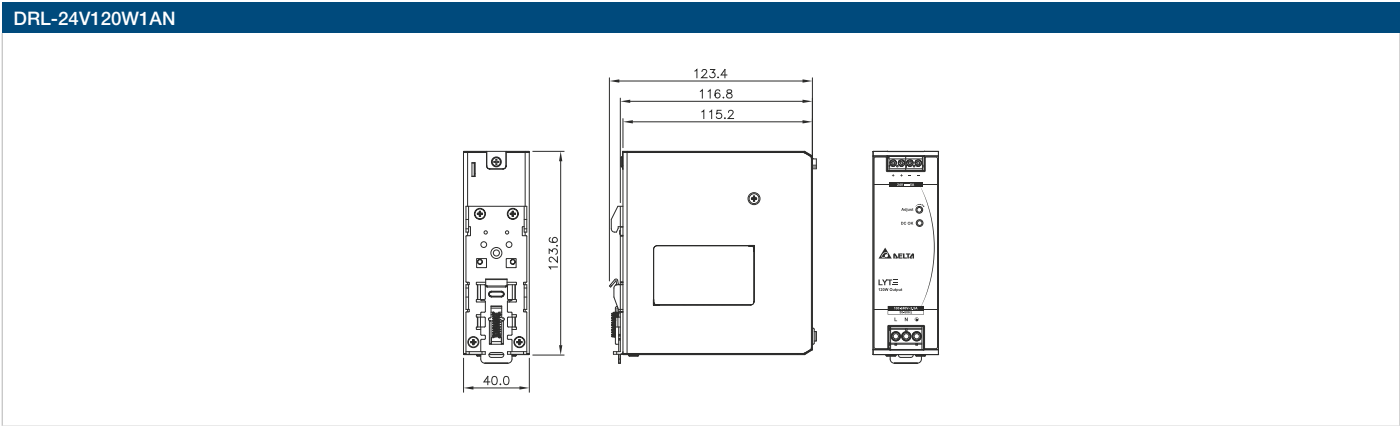

*Units in mm

Lyte DIN Rail Power Supply

48V Output



LYTE

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Built-in constant current circuit
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Built-in DC OK contact (for DRL-48V120W1AR)
- Overvoltage / Overcurrent / Over Temperature / Short Circuit Protections
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and UL 508 (Industrial standard)



GENERAL SPECIFICATIONS

	COMING SOON	
OUTPUT	DRL-48V120W1AN	DRL-48V120W1AR
Output Voltage	48V	48V
Output Voltage Range	44-56V	44-56V
Output Current	2.50A	2.50A
Output Power	120W	120W
Line Regulation	± 0.5%	
Load Regulation	± 1%	
PARD (20MHz)	< 150mVpp	
Hold-up Time	20ms typ. @ 115Vac, 90ms typ. @ 230Vac	
INPUT		
Phase Input	Single Phase	
Input Voltage Range	85-264Vac	
Input Frequency	47-63Hz	
Input Current	< 2.20A @ 115Vac, < 1.20A @ 230Vac	
Efficiency ¹⁾ at 100% Load	> 89.0% @ 115Vac, > 90.0% @ 230Vac	
Max Inrush Current (Cold Start)	20A typ. @ 115Vac, 40A typ. @ 230Vac	
Power Factor	Conform to EN 61000-3-2	
Leakage Current	< 0.25mA @ 240Vac	
MECHANICAL		
Case Cover / Chassis	SGCC / Aluminium	
Dimensions (L x W x D)	123.6 x 40 x 117.6 mm (4.87" x 1.57" x 4.63")	123.6 x 40 x 117.6 mm (4.87" x 1.57" x 4.63")
Unit Weight	0.54 kg (1.19 lb)	0.54 kg (1.19 lb)
Cooling System	Convection	
Input Terminal	3 Pins (Rated 300V/28A)	
Output Terminal	4 Pins (Rated 300V/28A)	6 Pins (Rated 300V/28A)
Input / Output Wire	I/P: AWG 18-8, O/P: AWG 24-12	I/P: AWG 18-8, O/P: AWG 24-12
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT		
Operating Temperature	-20°C to +70°C	
Storage Temperature	-40°C to +85°C	
Power De-rating	< -10°C (2% / °C), > 50°C (2.5% / °C) @ 230Vac < -10°C (2% / °C), > 40°C (1.67% / °C) @ 115Vac	
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	Industrial Application: 0 to 2,000 m (0 to 6,560 ft) ITE Application: 0 to 5,000 m (0 to 16,400 ft)	

Notes

- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

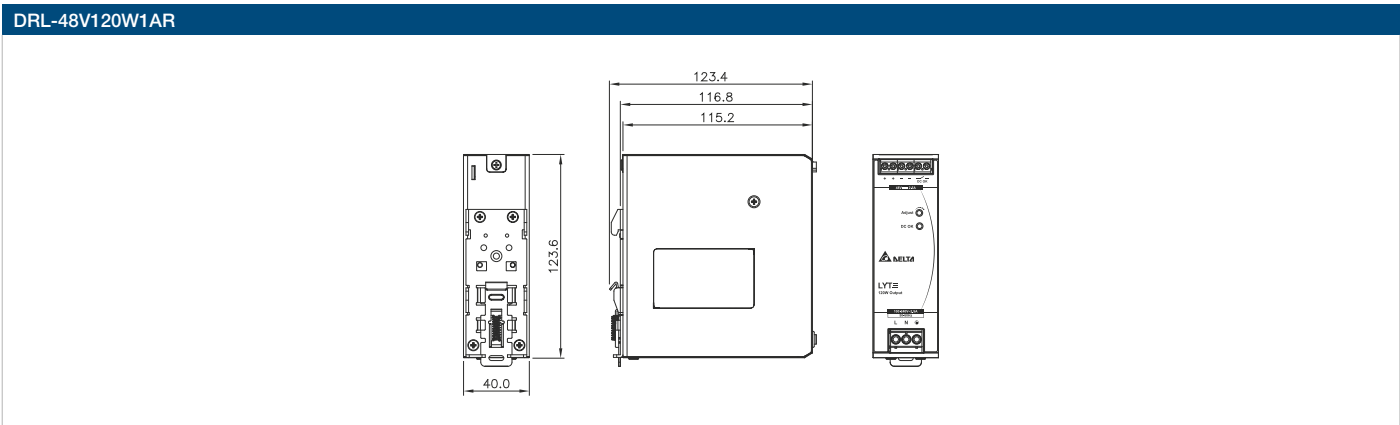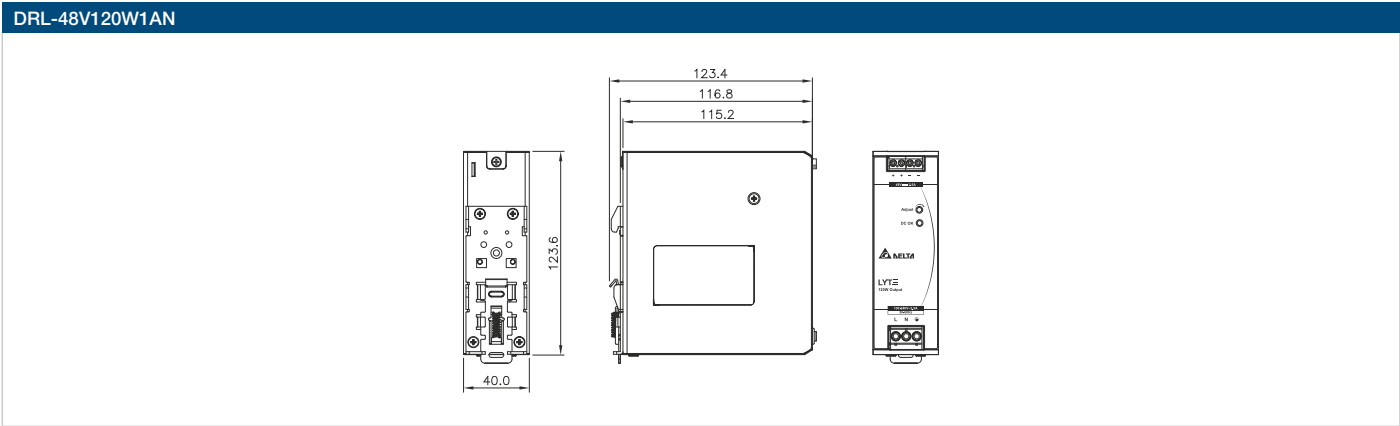

*Units in mm

Chrome DIN Rail Power Supply

5V, 12V Output



CHROME

HIGHLIGHTS & FEATURES

- Class II Double Isolation (No earth connection is required)
- Universal AC input voltage range and full power up to 55°C
- Power will not de-rate for the entire input voltage range
- Can be installed in compact cabinets
- NEC Class 2 and Limited Power Source (LPS) approvals
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and UL 508 (Industrial standard)

GENERAL SPECIFICATIONS

OUTPUT	DRC-5V10W1AZ	DRC-12V10W1AZ	DRC-12V30W1AZ	DRC-12V60W1AZ
Output Voltage	5V	12V	12V	12V
Output Voltage Range	5V	12V	11.5-14.5V	11.5-14.0V
Output Current	1.50A	0.83A	2.10A	4.50A
Output Power	7.5W	10W	25.2W	54W
Line Regulation	< 1% typ. (@ 90-264Vac, 100% load)			
Load Regulation	< 2% typ. (@ 90-264Vac, 100% load)			
PARD (20MHz)	< 150mVpp			
Hold-up Time	> 10ms @ 115Vac, > 30ms @ 230Vac	> 10ms @ 115Vac, > 30ms @ 230Vac	> 25ms @ 115Vac, > 30ms @ 230Vac	> 16ms @ 115Vac, > 30ms @ 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	90-264Vac			
Input Frequency	47-63Hz			
Input Current	< 0.30A @ 115Vac, < 0.20A @ 230Vac	< 0.30A @ 115Vac, < 0.20A @ 230Vac	< 0.80A @ 115Vac, < 0.60A @ 230Vac	< 1.50A @ 115Vac, < 0.80A @ 230Vac
Efficiency ¹⁾ at 100% Load	> 78.0% @ 115Vac, > 77.0% @ 230Vac	> 82.0% @ 115Vac & 230Vac	> 85.0% @ 115Vac & 230Vac	> 86.0% @ 115Vac & 230Vac
Max Inrush Current (Cold Start)	< 15A @ 115Vac, < 30A @ 230Vac		< 25A @ 115Vac, < 50A @ 230Vac	< 30A @ 115Vac, < 60A @ 230Vac
Power Factor	Conform to EN 61000-3-2			
Leakage Current	< 0.25mA @ 240Vac			
MECHANICAL				
Case Cover	Plastic			
Dimensions (L x W x D)	91 x 18 x 55.6 mm (3.58" x 0.71" x 2.19")	91 x 18 x 55.6 mm (3.58" x 0.71" x 2.19")	91 x 53 x 55.6 mm (3.58" x 2.09" x 2.19")	91 x 71 x 55.6 mm (3.58" x 2.80" x 2.19")
Unit Weight	0.06 kg (0.13 lb)	0.06 kg (0.13 lb)	0.14 kg (0.31 lb)	0.24 kg (0.53 lb)
Cooling System	Convection			
Input Terminal	2 Pins (Rated 300V/16A)		2 Pins (Rated 300V/25A)	
Output Terminal	2 Pins (Rated 300V/16A)		4 Pins (Rated 300V/25A)	
Input / Output Wire	AWG 26-12	AWG 26-12	AWG 24-12	AWG 22-12
MTBF ²⁾	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs
ENVIRONMENT				
Operating Temperature	-25°C to +71°C			
Storage Temperature	-25°C to +85°C			
Power De-rating	> 55°C (2.5% / °C)			
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 2,000 m (0 to 6,560 ft)			

Notes


1) At 25°C ambient temperature by vertical mounting orientation.

2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C) for vertical mounting orientation.


3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS


DRC-5V10W1AZ

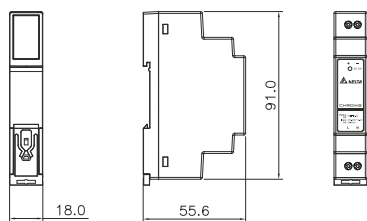


DRC-12V10W1AZ

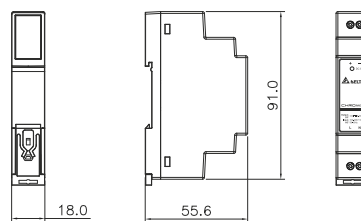

DRC-12V30W1AZ

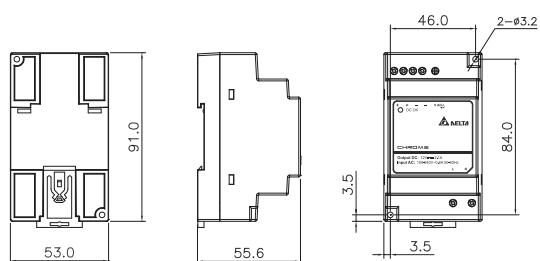

DRC-12V60W1AZ

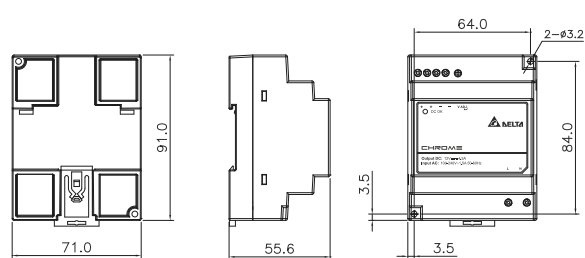

*Units in mm

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

Chrome DIN Rail Power Supply

24V Output



CHROME

HIGHLIGHTS & FEATURES

- Class II Double Isolation (No earth connection is required)
- Universal AC input voltage range and full power up to 55°C
- Power will not de-rate for the entire input voltage range
- Can be installed in compact cabinets
- NEC Class 2 and Limited Power Source (LPS) approvals
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and UL 508 (Industrial standard)





GENERAL SPECIFICATIONS

OUTPUT	DRC-24V10W1AZ	DRC-24V30W1AZ	DRC-24V60W1AZ	DRC-24V100W1AZ
Output Voltage	24V	24V	24V	24V
Output Voltage Range	24V	24-28V	24-28V	20-24.48V
Output Current	0.42A	1.25A	2.50A	3.80A
Output Power	10W	30W	60W	91.2W
Line Regulation	< 1% typ. (@ 90-264Vac, 100% load)			
Load Regulation	< 2% typ. (@ 90-264Vac, 100% load)			
PARD (20MHz)	< 150mVpp			
Hold-up Time	> 10ms @ 115Vac, > 30ms @ 230Vac	> 25ms @ 115Vac, > 30ms @ 230Vac	> 16ms @ 115Vac, > 30ms @ 230Vac	> 10ms @ 115Vac, > 30ms @ 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	90-264Vac			
Input Frequency	47-63Hz			
Input Current	< 0.30A @ 115Vac, < 0.20A @ 230Vac	< 0.80A @ 115Vac, < 0.60A @ 230Vac	< 1.50A @ 115Vac, < 1.00A @ 230Vac	< 2.20A @ 115Vac, < 1.00A @ 230Vac
Efficiency ¹⁾ at 100% Load	> 80.0% @ 115Vac & 230Vac	> 83.0% @ 115Vac & 230Vac	> 86.0% @ 115Vac & 230Vac	> 85.0% @ 115Vac, > 87.0% @ 230Vac
Max Inrush Current (Cold Start)	< 15A @ 115Vac, < 30A @ 230Vac	< 25A @ 115Vac, < 50A @ 230Vac	< 30A @ 115Vac, < 60A @ 230Vac	
Power Factor	Conform to EN 61000-3-2			
Leakage Current	< 0.25mA @ 240Vac			
MECHANICAL				
Case Cover	Plastic			
Dimensions (L x W x D)	91 x 18 x 55.6 mm (3.58" x 0.71" x 2.19")	91 x 53 x 55.6 mm (3.58" x 2.09" x 2.19")	91 x 71 x 55.6 mm (3.58" x 2.80" x 2.19")	91 x 89.9 x 55.6 mm (3.58" x 3.54" x 2.19")
Unit Weight	0.065 kg (0.14 lb)	0.14 kg (0.31 lb)	0.22 kg (0.49 lb)	0.35 kg (0.77 lb)
Cooling System	Convection			
Input Terminal	2 Pins (Rated 300V/16A)	2 Pins (Rated 300V/25A)	2 Pins (Rated 300V/25A)	2 Pins (Rated 300V/25A)
Output Terminal	2 Pins (Rated 300V/16A)	4 Pins (Rated 300V/25A)	4 Pins (Rated 300V/25A)	4 Pins (Rated 300V/25A)
Input / Output Wire	AWG 26-12	AWG 24-12	AWG 22-12	AWG 24-12
MTBF ²⁾	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs	> 500,000 hrs
ENVIRONMENT				
Operating Temperature	-25°C to +71°C			
Storage Temperature	-25°C to +85°C			
Power De-rating	> 55°C (2.5% / °C)			
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 2,000 m (0 to 6,560 ft)			

Notes

- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C) for vertical mounting orientation.
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

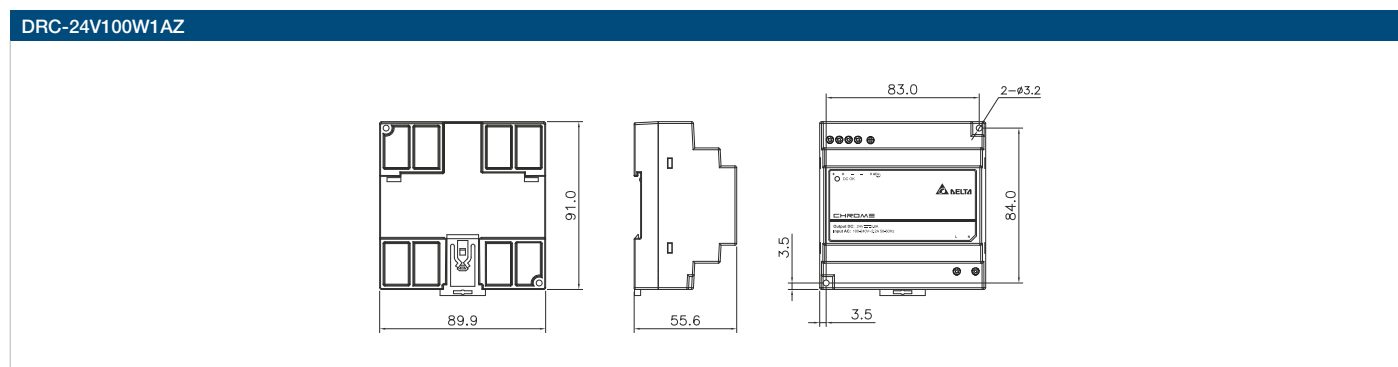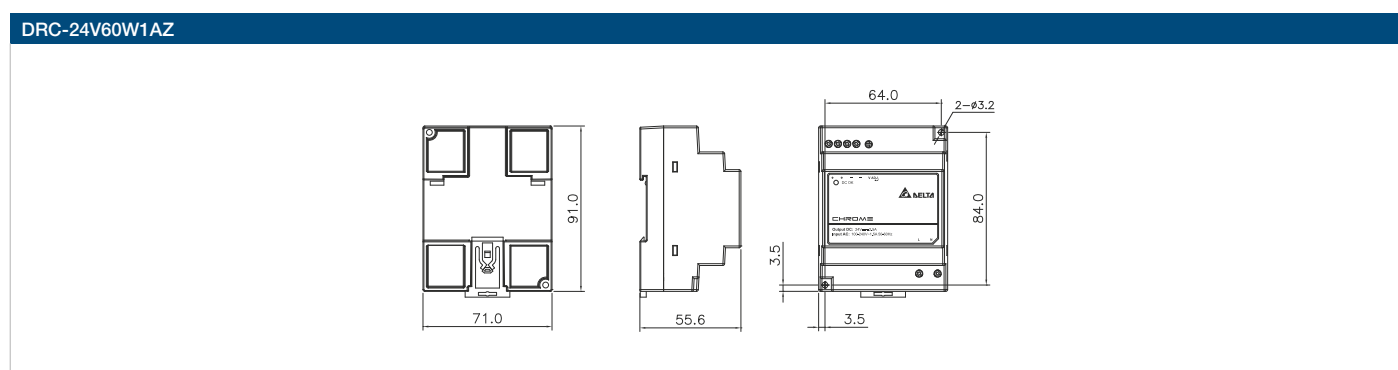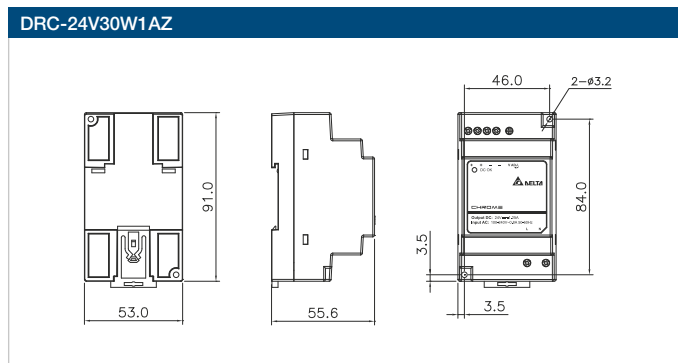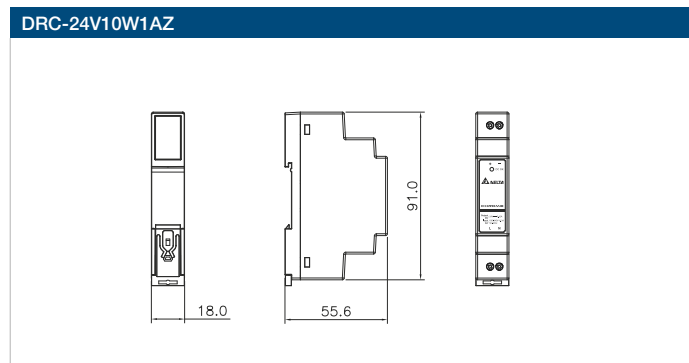

*Units in mm

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

Sync DIN Rail Power Supply

5V, 24V Output

sync



HIGHLIGHTS & FEATURES

- Ultra compact size
- Universal AC input voltage range and full power up to 55°C
- Power will not de-rate for the entire input voltage range
- Up to 88.0% efficiency
- NEC Class 2 / Limited Power Source (LPS) certified
- Overvoltage / Overcurrent / Over Temperature Protections

GENERAL SPECIFICATIONS


	COMING SOON		COMING SOON
OUTPUT	DRS-5V30W1NZ	DRS-24V30W1AZ	DRS-24V30W1NZ
Output Voltage	5V	24V	24V
Output Voltage Range	5-5.5V	21.6-26.4V	24-28V
Output Current	3.00A	1.25A	1.25A
Output Power	15W	30W	30W
Line Regulation	< 0.5% typ.	< 1%	< 0.5% typ.
Load Regulation	< 1% typ.	< 1%	< 1% typ.
PARD (20MHz)	< 75mVpp	< 150mVpp	< 75mVpp
Hold-up Time	20ms typ. @ 115Vac, 100ms typ. @ 230Vac	> 20ms @ 230Vac	20ms typ. @ 115Vac, 100ms typ. @ 230Vac
INPUT			
Phase Input	Single Phase		
Input Voltage Range	85-264Vac (DC input range 120-375Vdc) ¹⁾	85-264Vac	85-264Vac (DC input range 120-375Vdc) ¹⁾
Input Frequency	47-63Hz		
Input Current	< 0.50A @ 115Vac, < 0.30A @ 230Vac	< 0.80A @ 115Vac, < 0.40A @ 230Vac	< 0.80A @ 115Vac, < 0.40A @ 230Vac
Efficiency ²⁾ at 100% Load	78.0% typ. @ 115Vac, 79.0% typ. @ 230Vac	88.0% typ. @ 230Vac	87.0% typ. @ 115Vac, 88.0% typ. @ 230Vac
Max Inrush Current (Cold Start)	< 35A @ 115Vac, < 65A @ 230Vac	< 60A @ 230Vac	< 35A @ 115Vac, < 60A @ 230Vac
Power Factor	Conform to EN 61000-3-2		
Leakage Current	< 1mA @ 240Vac	< 0.5mA @ 240Vac	< 1mA @ 240Vac
MECHANICAL			
Case Cover	Plastic		
Dimensions (L x W x D)	75 x 21 x 89.5 mm (2.95" x 0.83" x 3.52")	75 x 21 x 89.5 mm (2.95" x 0.83" x 3.52")	75 x 21 x 89.5 mm (2.95" x 0.83" x 3.52")
Unit Weight	0.11 kg (0.24 lb)	0.10 kg (0.22 lb)	0.11 kg (0.24 lb)
Cooling System	Convection		
Input Terminal	3 Pins (Rated 300V/16A)		
Output Terminal	2 Pins (Rated 300V/16A)		
Input / Output Wire	I/P: AWG 22-12, O/P: AWG 20-12	AWG 26-12	I/P: AWG 22-12, O/P: AWG 20-12
MTBF ³⁾	> 500,000 hrs	> 700,000 hrs	> 500,000 hrs
ENVIRONMENT			
Operating Temperature	-20°C to +70°C		
Storage Temperature	-40°C to +85°C		
Power De-rating	< -10°C (2% / °C), > 55°C (3.33% / °C)	< -10°C (5% / °C), > 55°C (3.33% / °C)	< -10°C (2% / °C), > 55°C (3.33% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)		
Operating Altitude	0 to 2,000 m (0 to 6,560 ft)		

Notes


- 1) All models fulfill the test conditions for DC Input. DC input safety approval can be obtained upon request.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS


DRS-5V30W1NZ

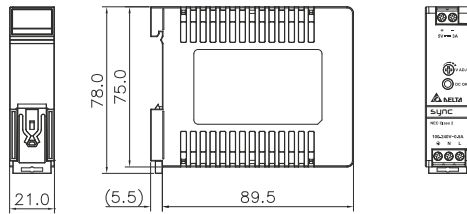

DRS-24V30W1AZ

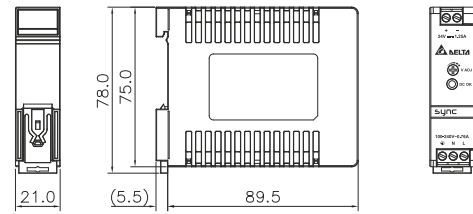

DRS-24V30W1NZ

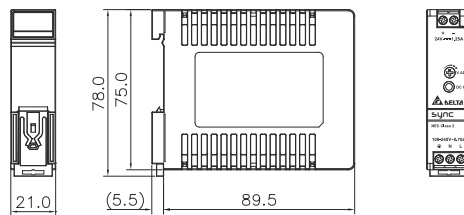

*Units in mm

CliQ II DIN Rail Modules

Redundancy Modules





HIGHLIGHTS & FEATURES

- Wide input and output range of 22-60Vdc
- Very wide operating temperature from -40°C to +80°C
- Built-in 2 channel DC OK signal and alarm relay contact
- Support N+1 Redundancy connection
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Hazardous Locations approval to ATEX and Class I, Div 2
- IP20 Certified

GENERAL SPECIFICATIONS

OUTPUT	DRR-20□	DRR-40□
Output Current	Normal mode = 0-20Amps; Short Circuit or Overload = 25Amps max	Normal mode = 0-40Amps; Short Circuit or Overload = 50Amps max
Voltage Drop (V _{in} - V _{out})	Typical 0.65V	
INPUT		
Input Voltage Range	22-60Vdc	
Input Current	(1+1 Redundancy) = Nom. 2 x 12.5Amps (N+1 Redundancy) = Nom. 2 x 10Amps (Single use) = Nom. 20Amps	(1+1 Redundancy) = Nom. 2 x 25Amps (N+1 Redundancy) = Nom. 2 x 20Amps (Single use) = Nom. 40Amps
MECHANICAL		
Case Cover	Aluminium	
Dimensions (L x W x D)	121 x 50 x 122.1 mm (4.76" x 1.97" x 4.81")	121 x 50 x 122.1 mm (4.76" x 1.97" x 4.81")
Unit Weight	0.38 kg (0.84 lb)	0.52 kg (1.15 lb)
Cooling System	Convection	
LED Indicators	Green LED DC OK: V _{in1} and V _{in2}	
MTBF ¹⁾	> 800,000 hrs	> 800,000 hrs
ENVIRONMENT		
Operating Temperature	-40°C to +80°C	
Storage Temperature	-40°C to +85°C	
Power De-rating	> 50°C (2.5% / °C)	
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	0 to 2,500 m (0 to 8,200 ft)	

MECHANICAL DRAWINGS

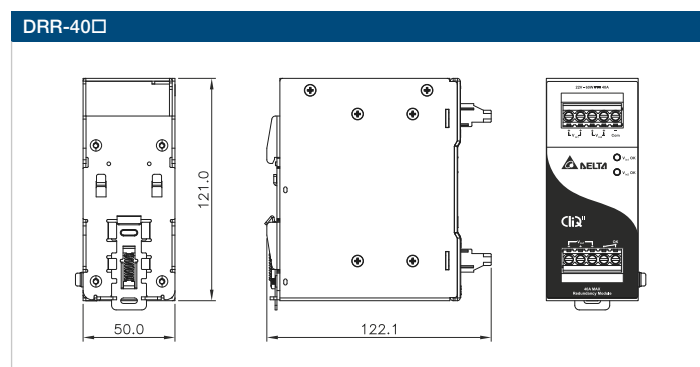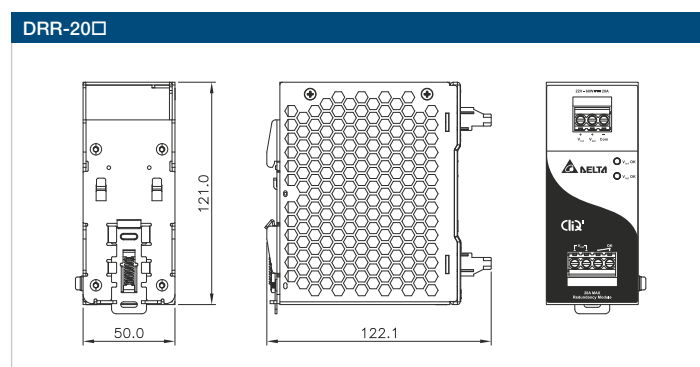

*Units in mm

Notes

- 1) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 24Vdc, O/P: 100% load) for vertical mounting orientation.
- 2) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

DC-UPS Module




HIGHLIGHTS & FEATURES

- Full corrosion resistant aluminium chassis
- Suitable for 24V system up to 40A
- Built-in diagnostic monitoring for DC OK, Discharge and Battery Fail by relay contacts
- LED indicator for DC OK, Battery Fail, DC Input, Battery Reverse Polarity and Battery Discharge
- High MTBF > 500,000 hrs per Telcordia SR-332
- Conformal coating option on PCBAs to protect against common dust and chemical pollutants

GENERAL SPECIFICATIONS

OUTPUT	DRU-24V40ABN
Output Voltage Range	23-28Vdc
Output Current	40.0A Max
Output Power	960W Max
INPUT	
Input Voltage Range	24-28Vdc
Input Current	Charging Mode: 2.0A ± 1.0A
Charging Time	< 3hr ± 1 hr (for battery 24V/15AH)
Efficiency	Charging Mode: > 70.0% Buffering Mode: > 99.0%
MECHANICAL	
Case Cover	Aluminium
Dimensions (L x W x D)	121 x 50 x 117.3 mm (4.76" x 1.97" x 4.62")
Unit Weight	0.60 kg (1.32 lb)
Cooling System	Convection
LED Indicators	Green LED ON = Battery is fully charged Green LED Flashing = Battery is charging Orange LED ON = Battery 24V or DC 24V reverse polarity Orange LED Flashing = Battery is discharging Red LED ON = Battery fail (no battery is connected)
Input / Output Terminal	4 Pins (Rated 600V/60A)
Signal Terminal	6 Pins (Rated 300V/27A)
Input / Output Wire	AWG 12-6 (Load: 0-20A) AWG 8-6 (Load: 20-40A)
Signal Wire	AWG 24-12
MTBF ¹⁾	> 500,000 hrs
ENVIRONMENT	
Operating Temperature	-20°C to +60°C
Storage Temperature	-40°C to +85°C
Operating Humidity	5 to 95% RH (Non-Condensing)
Operating Altitude	0 to 3,000 m (0 to 9,840 ft)

MECHANICAL DRAWINGS

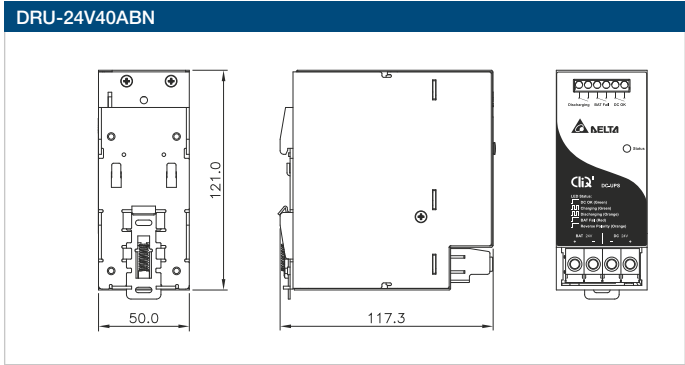

*Units in mm

Notes
1) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 24Vdc, O/P: 100% load) for vertical mounting orientation.
2) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

CliQ II DIN Rail Modules

Buffer Modules



HIGHLIGHTS & FEATURES

- Minimum buffering time of:
 - 250ms @ 24V/20A for DRB-24V020AB
 - 200ms @ 24V/40A for DRB-24V040AB
- Flexible operating buffering voltage modes:
 - Fixed mode at 22Vdc
 - Dynamic mode for $V_{in} - 1V$
- Support parallel connection to extend buffering time
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Hazardous Locations approval to ATEX and Class I, Div 2 (DRB-24V020ABA)

GENERAL SPECIFICATIONS


OUTPUT	DRB-24V020AB	DRB-24V040ABN
Output Voltage	24Vdc typ. (Depends on V_{in})	24Vdc typ. (Depends on V_{in})
Output Voltage Range	22-28V (Switch = "Fix 22V" buffering starts if terminal voltage falls below 22V) (Switch = " $V_{in} - 1V$ " buffering starts if terminal voltage is decreased by more than 1V)	
Output Current	20.0A	40.0A
PARD (20MHz)	< 200mVpp, Buffering Mode	< 350mVpp, Buffering Mode
Buffer Time	> 250ms @ 24V/20A load, > 5s @ 24V/1A load	> 200ms @ 24V/40A load, > 8s @ 24V/1A load
INPUT		
Input Voltage Range	22.8-28.8Vdc	
Input Current	Charging Mode: < 0.6A	Charging Mode: < 0.6A
Input Power	2.5W average (Standby Mode)	
Charging Time	< 30s	< 40s
Polarity Protection	Yes	Yes
MECHANICAL		
Case Cover	Aluminium	Aluminium
Dimensions (L x W x D)	121 x 70 x 120.1 mm (4.76" x 2.76" x 4.73")	121 x 70 x 120.1 mm (4.76" x 2.76" x 4.73")
Unit Weight	0.76 kg (1.68 lb)	0.90 kg (1.98 lb)
Cooling System	Convection	
LED Indicators	Green LED Off = Unit is discharged or $V_{in} < 22Vdc$ Green LED On = Unit is fully charged (Ready) Green LED Flashing Slowly (1Hz) = Unit is charging Green LED Flashing Quickly (10Hz) = Unit is discharging (Buffering)	
Input / Output Terminal	2 Pins (Rated 300V/30A)	4 Pins (Rated 300V/30A)
Signal Terminal	5 Pins (Rated 300V/30A)	
Input / Output Wire	AWG 12-10	AWG 12-10
Signal Wire	AWG 24-10	AWG 24-10
MTBF ¹⁾	> 800,000 hrs	> 800,000 hrs
SAFETY / ENVIRONMENT		
Operating Temperature	-25°C to +75°C	
Storage Temperature	-25°C to +85°C	
Power De-rating	> 70°C (5% / °C)	
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	0 to 2,500 m (0 to 8,200 ft)	

Notes


- 1) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 24Vdc, O/P: 100% load) for vertical mounting orientation.
- 2) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

DRB-24V020AB□

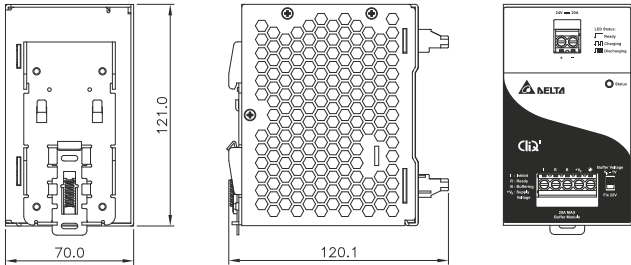

DRB-24V040ABN

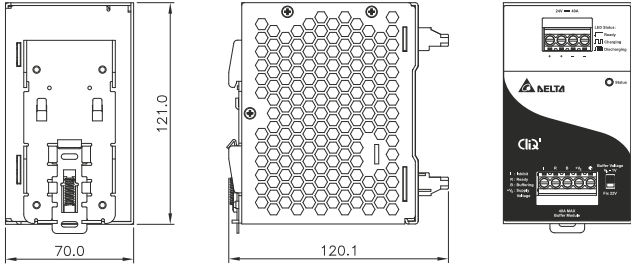

*Units in mm

Standard Products

Panel Mount Power Supply

PMC



The PMC panel mount power supply series offers nominal output voltages of 5V, 12V, 24V, 48V and dual output of 24V/5V. These single phase power supplies have wide operating temperature range of -10°C to +70°C and a highly dependable minimum hold-up time. The lightweight design is able to withstand harsh industrial environments and is encased in a full corrosion resistant aluminium casing except for the 5V/15W and 24V/600W models. In addition to overvoltage, over temperature and overcurrent protections, the highly reliable PMC series come with universal AC input and the power will not de-rate for the entire input voltage range. Most PMC power supplies conform to IEC/EN 61000-3-2 standards.

Typical Applications




PMH



Delta PMH panel mount power supply series is designed for use in household application and has wide operating temperature range of -30°C to +70°C. The product comes with universal AC input encased in a full corrosion resistant and lightweight aluminium body that can fit into compact household equipment enclosures. The PMH series complies with EN 60335-1 (Safety for household and similar electrical appliances); EN 61558-1 (Safety of power transformers, power supplies, reactors and similar products); EN 55014 (Emission for household appliances, electric tools and similar apparatus) and IEC/EN/UL 60950-1 (Safety for information technology equipment).

Typical Applications




PMF



The PMF panel mount power supply series currently offers nominal output voltages of 24V with power rating at 200W, 240W and 320W; 4.2V at 231W and 5V at 275W. The products come with universal AC input from 85Vac to 264Vac and wide operating temperature of -10°C to +70°C. The built-in PFC provides high power factor which is greater than 0.93 and conforms to harmonic current IEC/EN 61000-3-2, Class A and Class D. In addition to features like overvoltage and overcurrent protections, the PMF series can meet the price demand of cost competitive markets without compromising the quality of the components. This versatile series has two different connector options (Terminal Block and Front Face) to satisfy different application needs. Remote ON/OFF feature is also available for this series.

Typical Applications




PMT



The PMT panel mount power supply series offers nominal output voltages of 4.2V, 5V, 12V, 15V, 24V, 36V, 48V and dual output of 12V/5V and 24V/5V with a wide operating temperature range from -10°C to +70°C and can withstand shock and vibration according to IEC 60068-2. In addition to features like overvoltage and overcurrent protections, Delta's PMT series of panel mount power supplies can meet the price demand of cost competitive markets without compromising the quality of the components and product specifications. This versatile series has three different connector options (Terminal Block, Front Face and Harness) and can also be converted into L Frame (PML) or Open Frame (PMB) platform to satisfy different application needs.

Typical Applications



PMR



The PMR panel mount power supply series offers nominal output voltage of 4.2V and 5V with a wide operating temperature range from -10°C to +70°C and can withstand shock and vibration according to IEC 60068-2. The product comes with universal AC input voltage range at 88Vac to 264Vac. At only 30mm height and encased in a full corrosion resistant aluminium casing, the PMR series is made for installation in narrow space while its built-in active PFC circuit provides high power factor values and conforms to harmonic current emission according to IEC/EN 61000-3-2.

Typical Applications



Connector Options



1. Terminal Block connector
2. IP20 connector
3. Front Face connector
4. Harness connector

*Please refer the Model Numbering on pages 10-13.

All Delta power supplies are fully compliant with RoHS Directive 2011/65/EU for environmental protection. For more information or enquiries, please do not hesitate to contact your local Delta Electronics distributor or visit www.DeltaPSU.com.

PMC Panel Mount Power Supply

5V Output



PMC

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Full corrosion resistant aluminium casing (except PMC-05V015W1AA)
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs per Telcordia SR-332
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and EMI to EN 55022, Class B




GENERAL SPECIFICATIONS

OUTPUT	PMC-05V015W1AA	PMC-05V035W1A□	PMC-05V050W1AA
Output Voltage	5V	5V	5V
Output Voltage Range	4.75-5.50V	4.75-5.50V	4.75-5.50V
Output Current	3.00A	7.00A	10.0A
Output Power	15W	35W	50W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)		
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load)		
PARD (20MHz)	< 70mVpp		
Hold-up Time	> 15ms @ 115Vac, > 80ms @ 230Vac		
INPUT			
Phase Input	Single Phase		
Input Voltage Range	85-264Vac (DC input range 125-375Vdc) ¹⁾		
Input Frequency	47-63Hz		
Input Current	< 0.32A @ 115Vac, < 0.22A @ 230Vac	< 0.90A @ 115Vac, < 0.80A @ 230Vac	< 1.10A @ 115Vac, < 0.70A @ 230Vac
Efficiency ²⁾ at 100% Load	> 79.0% @ 115Vac & 230Vac	> 78.0% @ 115Vac, > 79.0% @ 230Vac	> 79.0% @ 115Vac & 230Vac
Max Inrush Current (Cold Start)	< 30A @ 115Vac, < 65A @ 230Vac	< 30A @ 115Vac, < 60A @ 230Vac	< 30A @ 115Vac, < 65A @ 230Vac
Power Factor	Conform to EN 61000-3-2		
Leakage Current	< 1mA @ 240Vac		
MECHANICAL			
Case Cover / Chassis	SECC Steel	Aluminium	
Dimensions (L x W x D)	77 x 51 x 28 mm (3.03" x 2.01" x 1.10")	98 x 97 x 38 mm (3.86" x 3.82" x 1.50")	128 x 97 x 38 mm (5.04" x 3.82" x 1.50")
Unit Weight	0.16 kg (0.35 lb)	0.18 kg (0.40 lb)	0.26 kg (0.57 lb)
Cooling System	Convection		
MTBF ³⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT			
Operating Temperature	-10°C to +70°C		
Storage Temperature	-25°C to +85°C		
Power De-rating	> 60°C (2.5% / °C)	> 50°C (2.5% / °C)	
Operating Humidity	5 to 95% RH (Non-Condensing)		
Operating Altitude	0 to 3,000 m (0 to 9,840 ft)		

Notes

- 1) All models are certified for DC Input except PMC-05V015W1AA which still fulfills the test conditions of this range. DC input safety approval can be obtained upon request.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

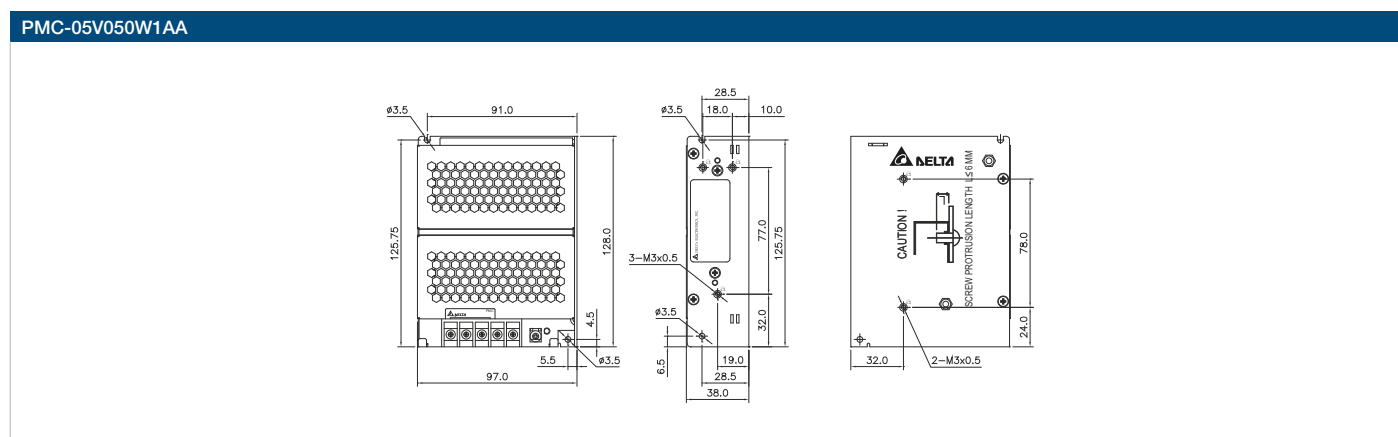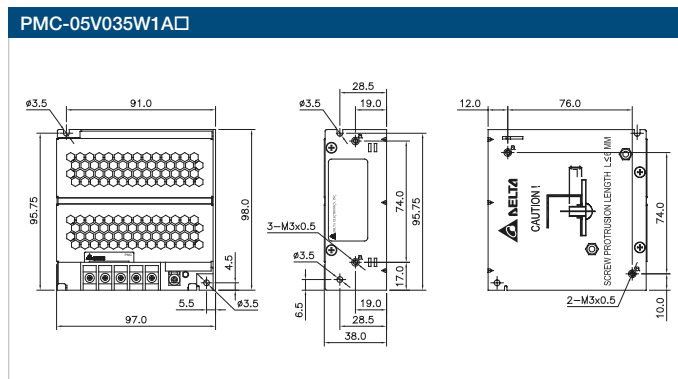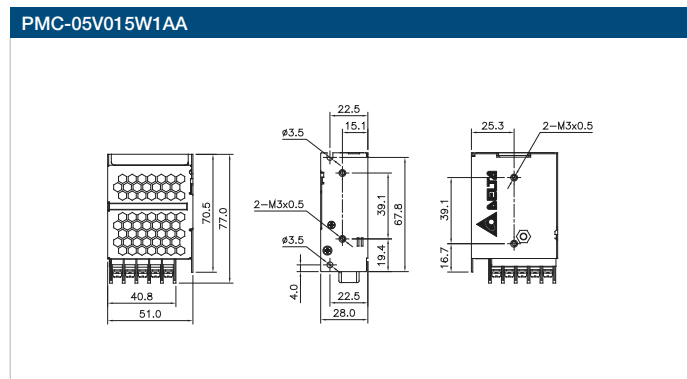

*Units in mm

	PMC-05V015W1AA	PMC-05V035W1A□	PMC-05V050W1AA
Input / Output Terminal	M3.5 x 5 Pins (Rated 300V/15A)	- PMC-05V035W1AA: M3.5 x 5 Pins (Rated 300V/15A) - PMC-05V035W1AJ: M3.5 x 5 Pins (Rated 300V/20A)	M3.5 x 5 Pins (Rated 300V/15A)
Input / Output Wire	AWG 22-16	- PMC-05V035W1AA: AWG 18-14 - PMC-05V035W1AJ: AWG 18-12	I/P: AWG 18-14 O/P: AWG 16-14

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

PMC Panel Mount Power Supply

12V Output



PMC

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Full corrosion resistant aluminium casing
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs per Telcordia SR-332
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and EMI to EN 55022, Class B
- Also available: IP20 connector





GENERAL SPECIFICATIONS

OUTPUT	PMC-12V035W1A□	PMC-12V050W1A□	PMC-12V060W1NA	PMC-12V100W1AA	PMC-12V150W1B□
Output Voltage	12V	12V	12V	12V	12V
Output Voltage Range	11-14V	11-14V	12-14V	11-14V	11-14V
Output Current	3.00A	4.17A	5.00A	8.33A	12.5A
Output Power	35W	50W	60W	100W	150W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)				
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load)				
PARD (20MHz)	< 100mVpp				
Hold-up Time	> 15ms @ 115Vac, > 80ms @ 230Vac				> 30ms @ 115Vac & 230Vac
INPUT					
Phase Input	Single Phase				
Input Voltage Range	85-264Vac (DC input range 125-375Vdc) ¹⁾				
Input Frequency	47-63Hz				
Input Current	< 0.75A @ 115Vac, < 0.50A @ 230Vac	< 1.10A @ 115Vac, < 0.70A @ 230Vac	< 1.35A @ 115Vac, < 0.90A @ 230Vac	< 2.00A @ 115Vac, < 1.10A @ 230Vac	< 1.70A @ 115Vac, < 1.00A @ 230Vac
Efficiency ²⁾ at 100% Load	> 85.0% @ 115Vac, > 86.0% @ 230Vac	> 84.0% @ 115Vac & 230Vac	> 86.0% @ 115Vac, > 87.0% @ 230Vac	> 84.0% @ 115Vac, > 86.0% @ 230Vac	> 87.0% @ 115Vac, > 88.0% @ 230Vac
Max Inrush Current (Cold Start)	< 30A @ 115Vac, < 60A @ 230Vac	< 30A @ 115Vac, < 65A @ 230Vac	< 50A @ 115Vac, < 100A @ 230Vac	< 60A @ 115Vac, < 130A @ 230Vac	< 60A @ 115Vac, < 120A @ 230Vac
Power Factor	Conform to EN 61000-3-2			Conform to EN 61000-3-2	> 0.99 @ 115Vac, > 0.90 @ 230Vac
Leakage Current	< 1mA @ 240Vac				
MECHANICAL					
Case Cover / Chassis	Aluminium				
Dimensions (L x W x D)	98 x 97 x 38 mm (3.86" x 3.82" x 1.50")	128 x 97 x 38 mm (5.04" x 3.82" x 1.50")	128 x 97 x 38 mm (5.04" x 3.82" x 1.50")	158 x 97 x 38 mm (6.22" x 3.82" x 1.50")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")
Unit Weight	0.21 kg (0.46 lb)	0.26 kg (0.57 lb)	0.28 kg (0.62 lb)	0.45 kg (0.99 lb)	0.54 kg (1.19 lb)
Cooling System	Convection				
MTBF ³⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +70°C		-20°C to +70°C	-10°C to +70°C	
Storage Temperature	-25°C to +85°C				
Power De-rating	> 50°C (2.5% / °C)		< -10°C (2% / °C); > 50°C (2.5% / °C)	> 50°C (2.5% / °C)	
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 3,000 m (0 to 9,840 ft)				

Notes

- 1) All models are certified for DC Input except PMC-12V150W1B□ which still fulfills the test conditions of this range. DC input safety approval can be obtained upon request.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

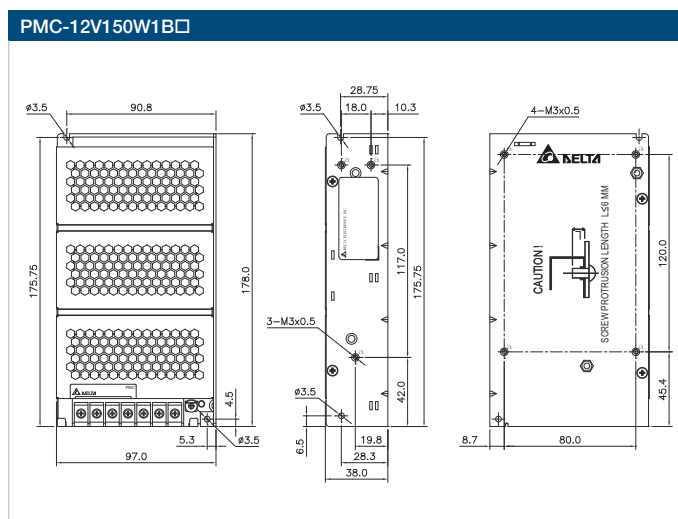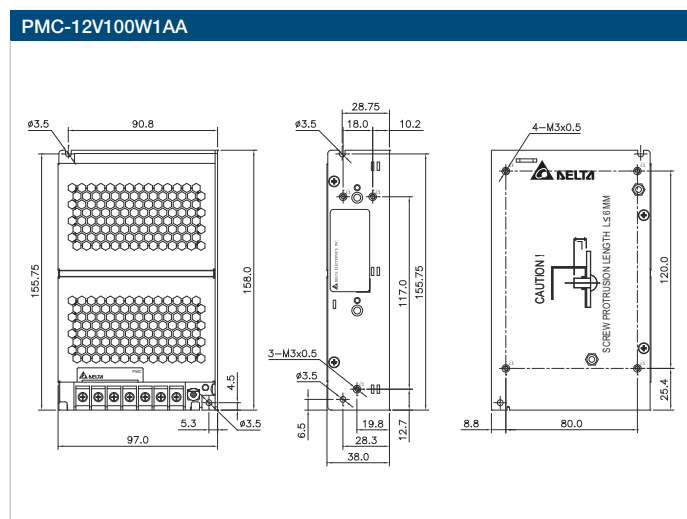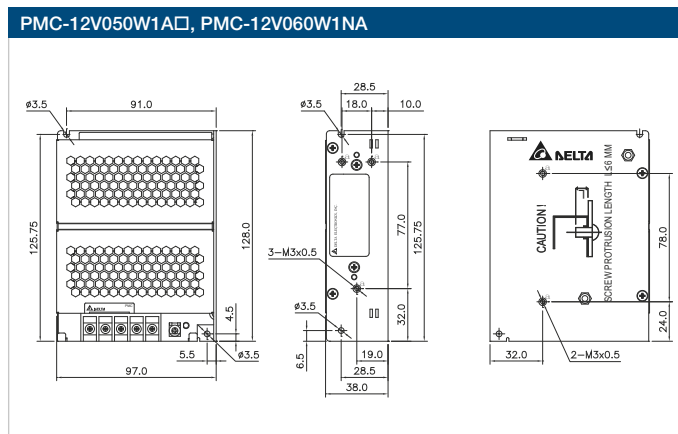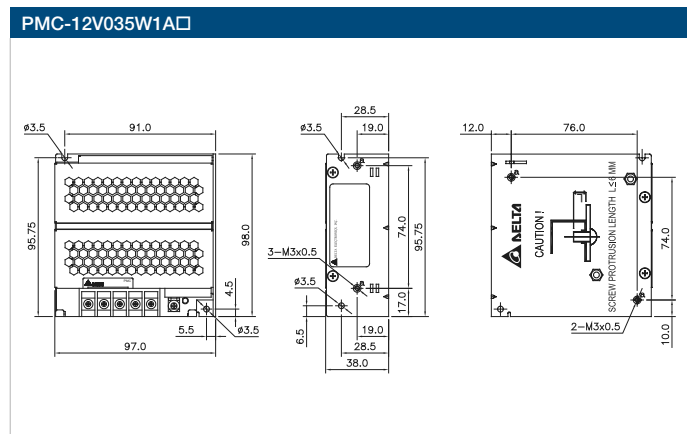

*Units in mm

	PMC-12V035W1A□	PMC-12V050W1A□	PMC-12V060W1NA	PMC-12V100W1AA	PMC-12V150W1B□
Input / Output Terminal	- PMC-12V035W1AA: M3.5 x 5 Pins (Rated 300V/15A) - PMC-12V035W1AJ: M3.5 x 5 Pins (Rated 300V/20A)	- PMC-12V050W1AA: M3.5 x 5 Pins (Rated 300V/15A) - PMC-12V050W1AJ: M3.5 x 5 Pins (Rated 300V/20A)	M3.5 x 5 Pins (Rated 300V/15A)	M3.5 x 7 Pins (Rated 300V/15A)	- PMC-12V150W1BA: M3.5 x 7 Pins (Rated 300V/15A) - PMC-12V150W1BJ: M3.5 x 7 Pins (Rated 300V/20A) - PMC-12V150W1BL: M3.5 x 7 Pins (Rated 300V/15A)
Input / Output Wire	- PMC-12V035W1AA: AWG 22-14 - PMC-12V035W1AJ: AWG 22-12	- PMC-12V050W1AA: AWG 22-14 - PMC-12V050W1AJ: AWG 22-12	AWG 22-14	AWG 22-14	- PMC-12V150W1BA: AWG 18-14 - PMC-12V150W1BJ: AWG 18-12 - PMC-12V150W1BL: AWG 18-14

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

PMC Panel Mount Power Supply

24V Output



PMC

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Full corrosion resistant aluminium casing
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs per Telcordia SR-332
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and EMI to EN 55022, Class B
- Also available: IP20 connector




GENERAL SPECIFICATIONS

OUTPUT	PMC-24V035W1A□	PMC-24V050W1A□	PMC-24V075W1A□	PMC-24V100W1A□	PMC-24V150W1A□
Output Voltage	24V	24V	24V	24V	24V
Output Voltage Range	22-28V	22-28V	22-28V	22-28V	22-28V
Output Current	1.46A	2.10A	3.12A	4.17A	6.25A
Output Power	35W	50W	75W	100W	150W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)				
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load)				
PARD (20MHz)	< 150mVpp		< 100mVpp	< 150mVpp	< 100mVpp
Hold-up Time	> 15ms @ 115Vac, > 80ms @ 230Vac	> 15ms @ 115Vac, > 90ms @ 230Vac			> 15ms @ 115Vac, > 80ms @ 230Vac
INPUT					
Phase Input	Single Phase				
Input Voltage Range	85-264Vac (DC input range 125-375Vdc) ¹⁾				
Input Frequency	47-63Hz				
Input Current	< 0.75A @ 115Vac, < 0.50A @ 230Vac	< 1.10A @ 115Vac, < 0.70A @ 230Vac	< 1.50A @ 115Vac, < 1.00A @ 230Vac	< 2.00A @ 115Vac, < 1.10A @ 230Vac	< 3.10A @ 115Vac, < 2.00A @ 230Vac
Efficiency ²⁾ at 100% Load	> 85.0% @ 115Vac & 230Vac	> 86.0% @ 115Vac & 230Vac			> 87.0% @ 115Vac, > 88.0% @ 230Vac
Max Inrush Current (Cold Start)	< 30A @ 115Vac, < 60A @ 230Vac		< 40A @ 115Vac, < 80A @ 230Vac	< 50A @ 115Vac, < 100A @ 230Vac	< 60A @ 115Vac, < 120A @ 230Vac
Power Factor	Conform to EN 61000-3-2				NA
Leakage Current	< 1mA @ 240Vac				
MECHANICAL					
Case Cover / Chassis	Aluminium				
Dimensions (L x W x D)	128 x 97 x 38 mm (5.04" x 3.82" x 1.50")	128 x 97 x 38 mm (5.04" x 3.82" x 1.50")	128 x 97 x 38 mm (5.04" x 3.82" x 1.50")	158 x 97 x 38 mm (6.22" x 3.82" x 1.50")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")
Unit Weight	0.24 kg (0.53 lb)	0.26 kg (0.57 lb)	0.30 kg (0.66 lb)	0.41 kg (0.90 lb)	0.48 kg (1.06 lb)
Cooling System	Convection				
MTBF ³⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +70°C				
Storage Temperature	-25°C to +85°C				
Power De-rating	> 50°C (2.5% / °C)				
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 3,000 m (0 to 9,840 ft)				0 to 5,000 m (0 to 16,400 ft)

Notes

- 1) All models are certified for DC Input.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

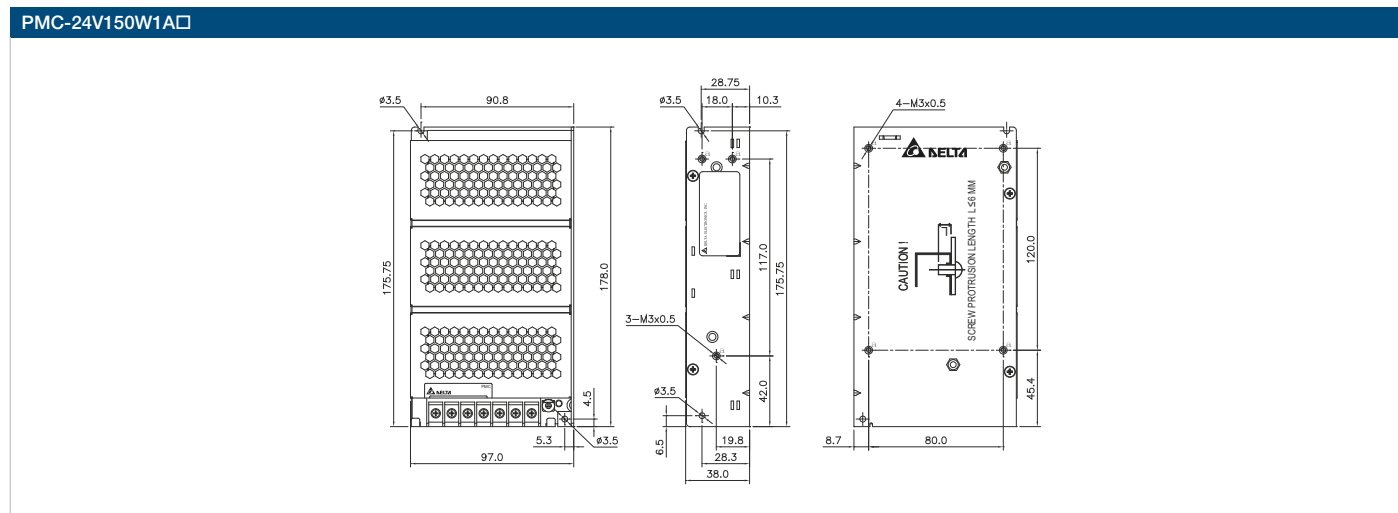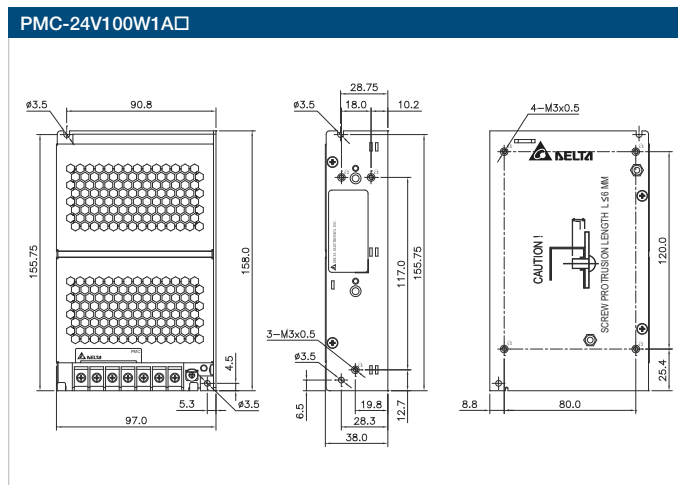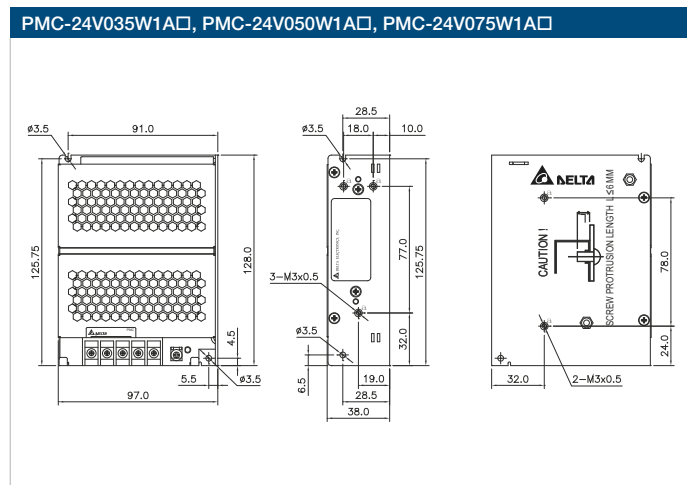

*Units in mm

	PMC-24V035W1A□	PMC-24V050W1A□	PMC-24V075W1A□	PMC-24V100W1A□	PMC-24V150W1A□
Input / Output Terminal	- PMC-24V035W1AA: M3.5 x 5 Pins (Rated 300V/15A) - PMC-24V035W1AJ: M3.5 x 5 Pins (Rated 300V/20A)	- PMC-24V050W1AA: M3.5 x 5 Pins (Rated 300V/15A) - PMC-24V050W1AJ: M3.5 x 5 Pins (Rated 300V/20A)	- PMC-24V075W1AA: M3.5 x 5 Pins (Rated 300V/15A) - PMC-24V075W1AJ: M3.5 x 5 Pins (Rated 300V/20A)	- PMC-24V100W1AA: M3.5 x 7 Pins (Rated 300V/15A) - PMC-24V100W1AJ: M3.5 x 7 Pins (Rated 300V/20A)	- PMC-24V150W1AA: M3.5 x 7 Pins (Rated 300V/15A) - PMC-24V150W1AJ: M3.5 x 7 Pins (Rated 300V/20A)
Input / Output Wire	- PMC-24V035W1AA: AWG 22-14 - PMC-24V035W1AJ: AWG 22-12	- PMC-24V050W1AA: AWG 22-14 - PMC-24V050W1AJ: AWG 22-12	- PMC-24V075W1AA: AWG 22-14 - PMC-24V075W1AJ: AWG 22-12	- PMC-24V100W1AA: AWG 22-14 - PMC-24V100W1AJ: AWG 22-12	- PMC-24V150W1AA: AWG 22-14 - PMC-24V150W1AJ: AWG 22-12

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

PMC Panel Mount Power Supply

24V Output



PMC

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Full corrosion resistant aluminium casing (except PMC-24V600W1BA)
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs per Telcordia SR-332
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and EMI to EN 55022, Class B
- Also available: IP20 and Front Face connectors




GENERAL SPECIFICATIONS

OUTPUT	PMC-24V150W2AA	PMC-24V150W1B□	PMC-24V300W1BA	PMC-24V600W1BA	PMC-DSPV100W1A
Output Voltage	24V	24V	V1: 24V, V2 SB: 12V	24V	V1: 24V, V2: 5V
Output Voltage Range	22-28V	22-28V	V1: 22-28V	21.6-26.4V	V1: 22.8-26.4V
Output Current	6.25A	6.25A	V1: 12.5A, V2 SB: 0.50A	25.0A (50.0A for 5s)	V1: 2.70A, V2: 7.00A
Output Power	150W	150W	300W	600W (1,200W for 5s)	100W
Line Regulation	< 0.5% typ. (@ 170-264Vac input, 100% load)	< 0.5% typ. (@ 85-264Vac input, 100% load)	< 0.5% typ. (@ 85-264Vac input, 100% load)		
Load Regulation	< 1% typ. (@ 170-264Vac input, 0-100% load)	< 1% typ. (@ 85-264Vac input, 0-100% load)	< 1% typ. (@ 85-264Vac input, 0-100% load)		
PARD (20MHz)	< 100mVpp		V1: < 100mVpp, V2: < 200mVpp	< 180mVpp	V1: < 200mVpp, V2: < 80mVpp
Hold-up Time	> 20ms @ 230Vac	> 30ms @ 115Vac & 230Vac	> 15ms @ nominal input, 100% load	> 20ms @ 115Vac & 230Vac	> 15ms @ 115Vac, > 80ms @ 230Vac
INPUT					
Phase Input	Single Phase				
Input Voltage Range	180-264Vac (DC input range 220-375Vdc) ¹⁾	85-264Vac (DC input range 125-375Vdc) ¹⁾		85-264Vac (DC input range 120-370Vdc) ¹⁾	85-264Vac (DC input range 125-375Vdc) ¹⁾
Input Frequency	47-63Hz				
Input Current	< 1.60A @ 230Vac	< 1.70A @ 115Vac, < 1.00A @ 230Vac	< 4.00A @ 115Vac, < 2.00A @ 230Vac	< 6.50A @ 115Vac, < 3.20A @ 230Vac	< 2.00A @ 115Vac, < 1.10A @ 230Vac
Efficiency ²⁾ at 100% Load	> 87.0% @ 230Vac	> 89.0% @ 115Vac, > 91.0% @ 230Vac	> 86.0% @ 115Vac, > 88.0% @ 230Vac	> 86.0% @ 115Vac, > 89.0% @ 230Vac	> 84.0% @ 115Vac, > 86.0% @ 230Vac
Max Inrush Current (Cold Start)	< 120A @ 230Vac	< 60A @ 115Vac, < 120A @ 230Vac	< 35A @ 115Vac, < 70A @ 230Vac	< 20A @ 115Vac, < 40A @ 230Vac	< 50A @ 115Vac, < 100A @ 230Vac
Power Factor	Conform to EN 61000-3-2	> 0.99 @ 115Vac, > 0.90 @ 230Vac	> 0.99 @ 115Vac, > 0.97 @ 230Vac	> 0.99 @ 115Vac, > 0.94 @ 230Vac	Conform to EN 61000-3-2
Leakage Current	< 1mA @ 240Vac			< 1.5mA @ 240Vac	< 1mA @ 240Vac
MECHANICAL					
Case Cover / Chassis	Aluminium			SECC Steel	Aluminium
Dimensions (L x W x D)	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")	199 x 105 x 41 mm (7.83" x 4.13" x 1.61")	215 x 120 x 61 mm (8.46" x 4.72" x 2.40")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")
Unit Weight	0.50 kg (1.10 lb)	0.54 kg (1.19 lb)	0.82 kg (1.81 lb)	1.60 kg (3.53 lb)	0.52 kg (1.15 lb)
Cooling System	Convection		Forced Cooling		Convection
MTBF ³⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 300,000 hrs	> 700,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +70°C			-20°C to +70°C	-10°C to +70°C
Storage Temperature	-25°C to +85°C			-20°C to +75°C	-25°C to +85°C
Power De-rating	> 50°C (2.5% / °C)				
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 3,000 m (0 to 9,840 ft)	0 to 5,000 m (0 to 16,400 ft)	0 to 3,000 m (0 to 9,840 ft)		

Notes

- 1) All models fulfill the test conditions for this range. DC input safety approval can be obtained upon request. While PMC-24V150W2AA and PMC-DSPV100W1A are also certified for DC Input.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation. For PMC-24V300W1BA and PMC-24V600W1BA models, MTBF calculations do not include fan life time.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

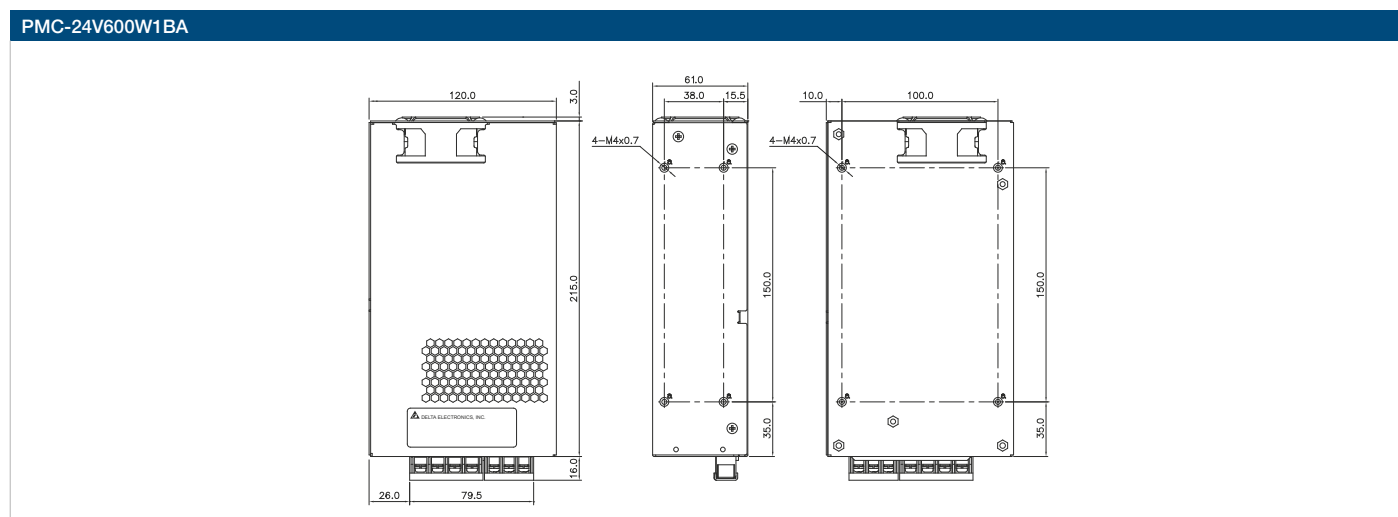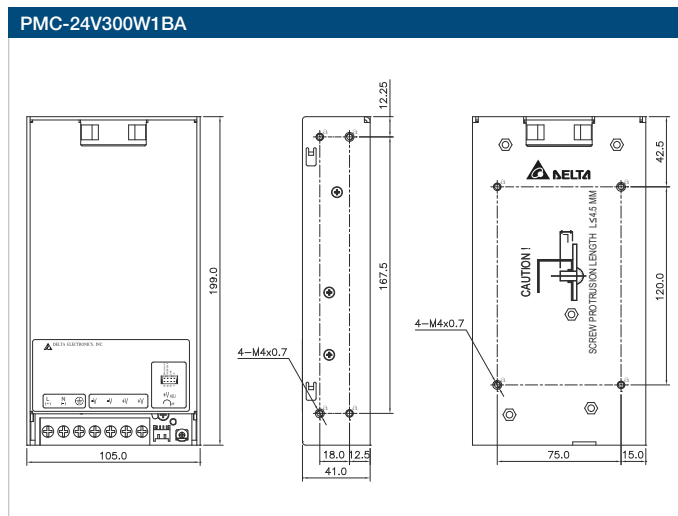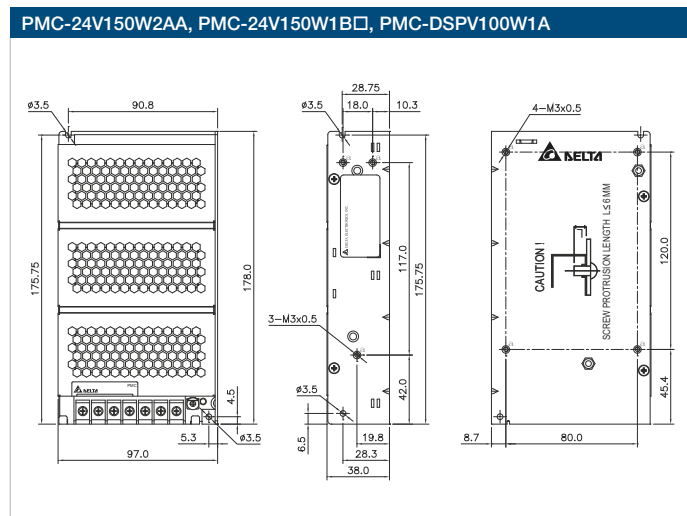

*Units in mm

	PMC-24V150W2AA	PMC-24V150W1B□	PMC-24V300W1BA	PMC-24V600W1BA	PMC-DSPV100W1A
Input / Output Terminal	M3.5 x 7 Pins (Rated 300V/15A)	- PMC-24V150W1BA: M3.5 x 7 Pins (Rated 300V/15A) - PMC-24V150W1BJ: M3.5 x 7 Pins (Rated 300V/20A) - PMC-24V150W1BL: M3.5 x 7 Pins (Rated 300V/15A)	M3.5 x 7 Pins (Rated 300V/20A)	I/P: M4 x 3 Pins (Rated 300V/20A) O/P: M4 x 4 Pins (Rated 300V/25A)	M3.5 x 7 Pins (Rated 300V/15A)
Input / Output Wire	AWG 22-14	- PMC-24V150W1BA: AWG 22-14 - PMC-24V150W1BJ: AWG 22-12 - PMC-24V150W1BL: AWG 22-12	AWG 20-12	AWG 14-12	AWG 22-14

PMC Panel Mount Power Supply

48V Output



PMC


HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Full corrosion resistant aluminium casing
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs per Telcordia SR-332
- Safety approval according to IEC/EN/UL 60950-1 (ITE standard) and EMI to EN 55022, Class B
- Also available: IP20 and Front Face connectors

GENERAL SPECIFICATIONS

OUTPUT	PMC-48V150W1B□
Output Voltage	48V
Output Voltage Range	44-53V
Output Current	3.125A
Output Power	150W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)
Load Regulation	< 1% typ. (@ 85-264Vac input, 0-100% load)
PARD (20MHz)	< 200mVpp
Hold-up Time	> 30ms @ 115Vac & 230Vac
INPUT	
Phase Input	Single Phase
Input Voltage Range	85-264Vac (DC input range 125-375Vdc) ¹⁾
Input Frequency	47-63Hz
Input Current	< 1.70A @ 115Vac, < 1.00A @ 230Vac
Efficiency ²⁾ at 100% Load	> 89.0% @ 115Vac, > 91.0% @ 230Vac
Max Inrush Current (Cold Start)	< 20A @ 115Vac, < 40A @ 230Vac
Power Factor	> 0.99 @ 115Vac, > 0.92 @ 230Vac
Leakage Current	< 1.5mA @ 240Vac
MECHANICAL	
Case Cover / Chassis	Aluminium
Dimensions (L x W x D)	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")
Unit Weight	0.53 kg (1.17 lb)
Cooling System	Convection
MTBF ³⁾	> 700,000 hrs
ENVIRONMENT	
Operating Temperature	-10°C to +70°C
Storage Temperature	-25°C to +85°C
Power De-rating	> 50°C (2.5% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)

MECHANICAL DRAWINGS

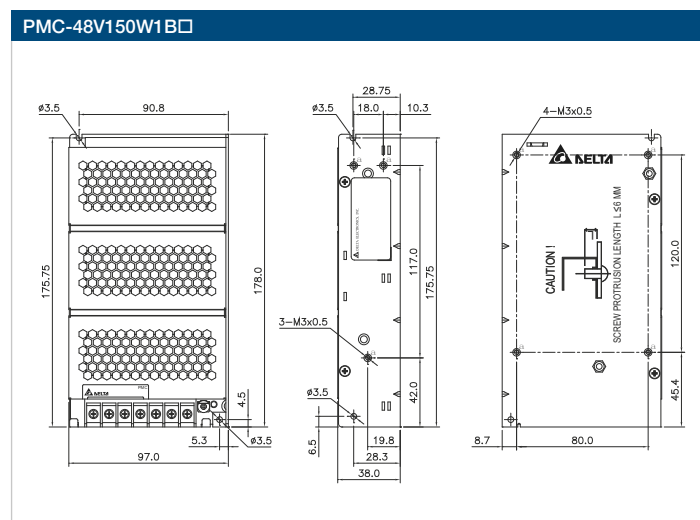

*Units in mm

	PMC-48V150W1B□
Input / Output Terminal	• PMC-48V150W1BA: M3.5 x 7 Pins (Rated 300V/15A) • PMC-48V150W1BJ: M3.5 x 7 Pins (Rated 300V/20A) • PMC-48V150W1BL: M3.5 x 7 Pins (Rated 300V/15A)
Input / Output Wire	• PMC-48V150W1BA: AWG 22-14 • PMC-48V150W1BJ: AWG 22-12 • PMC-48V150W1BL: AWG 22-12

Notes

- 1) All models fulfill the test conditions for DC Input. DC input safety approval can be obtained upon request.
- 2) At 25°C ambient temperature by vertical mounting orientation.
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

PMF Panel Mount Power Supply

4.2V, 5V Output



PMF


HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Built-in active PFC and automatic fan speed control
- Full corrosion resistant aluminium casing
- Conforms to harmonic current IEC/EN 61000-3-2, Class D
- Remote ON/OFF is available as an option
- Short Circuit / Overvoltage / Overcurrent / Over Temperature Protections

GENERAL SPECIFICATIONS

OUTPUT	PMF-4V320WC□□	PMF-5V320WC□□
Output Voltage	4.2V	5V
Output Voltage Range	3.78-4.62V	4.50-5.50V
Output Current	55.0A	55.0A
Output Power	231W	275W
Line Regulation	< 0.5%	
Load Regulation	< 1.5%	< 1%
PARD (20MHz)	< 150mVpp	
Hold-up Time	16ms typ. @ 115Vac & 230Vac	
INPUT		
Phase Input	Single Phase	
Input Voltage Range	85-264Vac	
Input Frequency	47-63Hz	
Input Current	5.00A typ. @ 115Vac, 2.50A typ. @ 230Vac	5.00A typ. @ 115Vac, 2.50A typ. @ 230Vac
Efficiency ¹⁾ at 100% Load	76.5% typ. @ 230Vac	78.5% typ. @ 230Vac
Max Inrush Current (Cold Start)	20A typ. @ 115Vac, 40A typ. @ 230Vac	
Power Factor	0.97 typ. @ 115Vac, 0.94 typ. @ 230Vac	0.98 typ. @ 115Vac, 0.95 typ. @ 230Vac
Leakage Current	< 1mA @ 240Vac	
MECHANICAL		
Case Cover / Chassis	Aluminium	
Dimensions (L x W x D)	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")
Unit Weight	0.86 kg (1.90 lb)	0.86 kg (1.90 lb)
Cooling System	Forced Cooling	
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT		
Operating Temperature	-10°C to +70°C	
Storage Temperature	-25°C to +85°C	
Power De-rating	> 55°C (3.33% / °C)	
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)	

MECHANICAL DRAWINGS

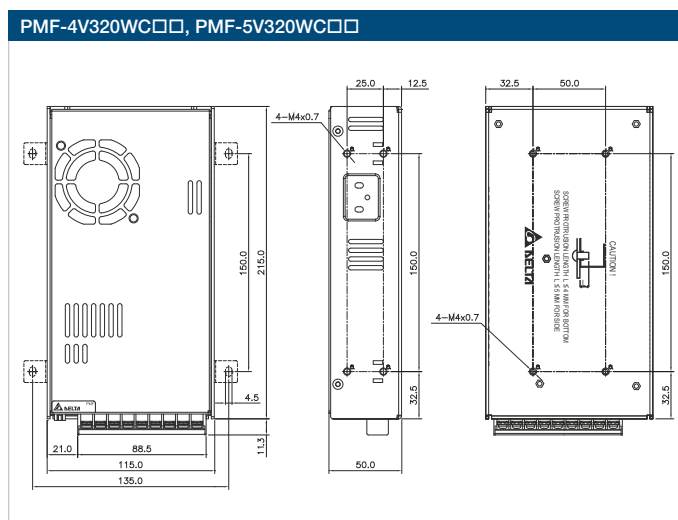

*Units in mm

	PMF-4V320WC□□	PMF-5V320WC□□
Input / Output Terminal	• PMF-4V320WCA□□: M3.5 x 9 Pins (Rated 300V/15A) • PMF-4V320WCG□□: M3.5 x 9 Pins (Rated 300V/20A)	• PMF-5V320WCA□□: M3.5 x 9 Pins (Rated 300V/15A) • PMF-5V320WCG□□: M3.5 x 9 Pins (Rated 300V/20A)
Input / Output Wire	AWG 14-12**	AWG 14-12**

**Only use wire that can withstand operating temperature of more than 125°C.

Notes

- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C). MTBF calculations do not include fan life time.
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

PMF Panel Mount Power Supply

24V Output



PMF

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Built-in active PFC and automatic fan speed control
- Full corrosion resistant aluminium casing
- Conforms to harmonic current IEC/EN 61000-3-2, Class D
- Remote ON/OFF is available as an option
- Short Circuit / Overvoltage / Overcurrent / Over Temperature Protections

GENERAL SPECIFICATIONS


OUTPUT	PMF-24V200WC□□	PMF-24V240WC□□	PMF-24V320WC□□
Output Voltage	24V	24V	24V
Output Voltage Range	21.6-26.4V	21.6-26.4V	21.6-26.4V
Output Current	8.40A	10.0A	13.3A
Output Power	201.6W	240W	320W
Line Regulation	< 0.5%		
Load Regulation	< 0.5%		< 1%
PARD (20MHz)	150mVpp		
Hold-up Time	20ms typ. @ 115Vac & 230Vac		
INPUT			
Phase Input	Single Phase		
Input Voltage Range	85-264Vac		
Input Frequency	47-63Hz		
Input Current	3.50A typ. @ 115Vac, 1.70A typ. @ 230Vac	3.60A typ. @ 115Vac, 1.80A typ. @ 230Vac	5.00A typ. @ 115Vac, 2.50A typ. @ 230Vac
Efficiency ¹⁾ at 100% Load	87.0% typ. @ 230Vac		
Max Inrush Current (Cold Start)	30A typ. @ 115Vac, 50A typ. @ 230Vac	30A typ. @ 115Vac, 60A typ. @ 230Vac	20A typ. @ 115Vac, 40A typ. @ 230Vac
Power Factor	0.98 typ. @ 115Vac, 0.95 typ. @ 230Vac	0.99 typ. @ 115Vac, 0.95 typ. @ 230Vac	0.98 typ. @ 115Vac, 0.95 typ. @ 230Vac
Leakage Current	< 0.5mA @ 240Vac		< 1mA @ 240Vac
MECHANICAL			
Case Cover / Chassis	Aluminium		
Dimensions (L x W x D)	190 x 93 x 50 mm (7.48" x 3.66" x 1.97")	190 x 93 x 50 mm (7.48" x 3.66" x 1.97")	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")
Unit Weight	0.66 kg (1.46 lb)	0.66 kg (1.46 lb)	0.84 kg (1.85 lb)
Cooling System	Forced Cooling		
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT			
Operating Temperature	-10°C to +70°C		
Storage Temperature	-20°C to +85°C		
Power De-rating	> 50°C (2.5% / °C)		
Operating Humidity	5 to 95% RH (Non-Condensing)		
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)		

Notes


- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C). MTBF calculations do not include fan life time.
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

PMF-24V200WC□□, PMF-24V240WC□□

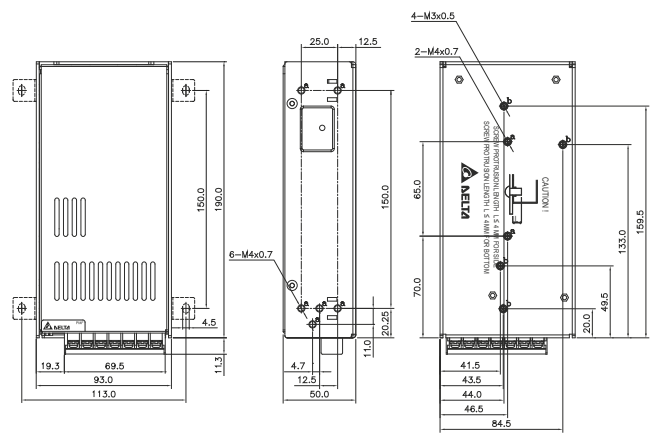

PMF-24V320WC□□

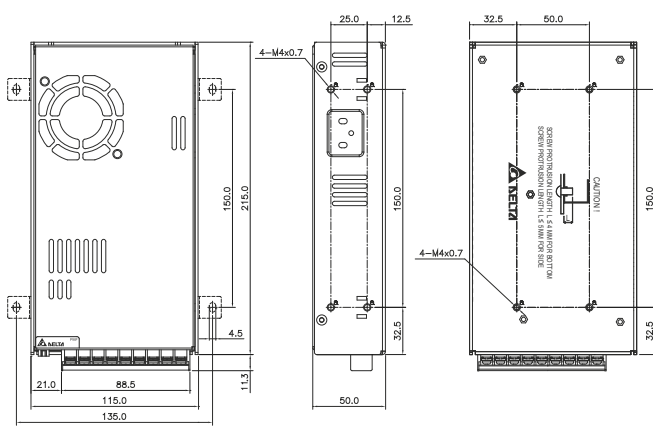

*Units in mm

	PMF-24V200WC□□	PMF-24V240WC□□	PMF-24V320WC□□
Input / Output Terminal	- PMF-24V200WCA□□: M3.5 x 7 Pins (Rated 300V/15A) - PMF-24V200WCG□□: M3.5 x 7 Pins (Rated 300V/20A)	- PMF-24V240WCA□□: M3.5 x 7 Pins (Rated 300V/15A) - PMF-24V240WCG□□: M3.5 x 7 Pins (Rated 300V/20A)	- PMF-24V320WCA□□: M3.5 x 9 Pins (Rated 300V/15A) - PMF-24V320WCG□□: M3.5 x 9 Pins (Rated 300V/20A)
Input / Output Wire	AWG 20-12	AWG 20-12	AWG 20-12

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

PMH Panel Mount Power Supply

24V Output



PMH

HIGHLIGHTS & FEATURES

- Household appliance approvals IEC/EN 60335-1, IEC/EN 61558-1 and IEC/EN 61558-2-16
- Universal AC input voltage range
- Power will not de-rate for the entire input voltage range
- Full corrosion resistant aluminium casing
- High MTBF > 700,000 hrs per Telcordia SR-332
- Also available: IP20, Front Face and Harness connectors





GENERAL SPECIFICATIONS

			COMING SOON	NEW
OUTPUT	PMH-24V50WCA□	PMH-24V100WCA□	PMH-24V150WCB□	PMH-24V200WCB□
Output Voltage	24V	24V	24V	24V
Output Voltage Range	22-28V	22-28V	22-28V	22-28V
Output Current	2.10A	4.16A	6.25A	8.33A
Output Power	50W	100W	150W	200W
Line Regulation	< 0.5% typ. (@ 85-264Vac input, 100% load)			
Load Regulation	< 0.5% typ. (@ 85-264Vac input, 0-100% load)			
PARD (20MHz)	< 150mVpp	< 100mVpp	< 100mVpp	
Hold-up Time	> 15ms @ 115Vac, > 90ms @ 230Vac	> 15ms @ 115Vac, > 100ms @ 230Vac	> 45ms @ 115Vac & 230Vac	> 20ms @ 115Vac & 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	85-264Vac (DC input range 120-375Vdc) ¹⁾			
Input Frequency	47-63Hz			
Input Current	< 0.93A @ 115Vac, < 0.59A @ 230Vac	< 2.00A @ 115Vac, < 1.10A @ 230Vac	< 1.60A @ 115Vac, < 0.90A @ 230Vac	< 2.50A @ 115Vac, < 1.75A @ 230Vac
Efficiency ¹⁾ at 100% Load	> 87.0% @ 115Vac, > 88.0% @ 230Vac	> 87.0% @ 115Vac, > 89.0% @ 230Vac	> 89.0% @ 115Vac, > 91.0% @ 230Vac	> 89.5% @ 115Vac, > 91.0% @ 230Vac
Max Inrush Current (Cold Start)	< 35A @ 115Vac, < 70A @ 230Vac	< 60A @ 115Vac, < 120A @ 230Vac	< 30A @ 115Vac, < 60A @ 230Vac	< 45A @ 115Vac, < 60A @ 230Vac
Power Factor	Conform to EN 61000-3-2		> 0.98 @ 115Vac, > 0.89 @ 230Vac	> 0.98 @ 115Vac, > 0.92 @ 230Vac
Leakage Current	< 0.5mA @ 264Vac		< 0.9mA @ 264Vac	
MECHANICAL				
Case Cover / Chassis	Aluminium			
Dimensions (L x W x D)	98 x 97 x 38 mm (3.86" x 3.82" x 1.50")	158 x 97 x 38 mm (6.22" x 3.82" x 1.50")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")	190 x 97 x 38 mm (7.48" x 3.82" x 1.50")
Unit Weight	0.21 kg (0.46 lb)	0.43 kg (0.95 lb)	0.56 kg (1.23 lb)	0.61 kg (1.34 lb)
Cooling System	Convection			
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT				
Operating Temperature	-30°C to +70°C			
Storage Temperature	-30°C to +85°C			
Power De-rating	< -20°C (2% / °C), > 50°C (2.5% / °C)			< -20°C (2% / °C), > 45°C (2% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)			

Notes

- 1) PMH-24V50WCA□ and PMH-24V100WCA□ are certified for DC Input. While PMH-24V150WCB□ and PMH-24V200WCB□ still fulfills the test conditions of this range. DC input safety approval can be obtained upon request.
- 2) At 25°C ambient temperature by vertical mounting orientation
- 3) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 115Vac, O/P: 100% load) for vertical mounting orientation
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated

MECHANICAL DRAWINGS

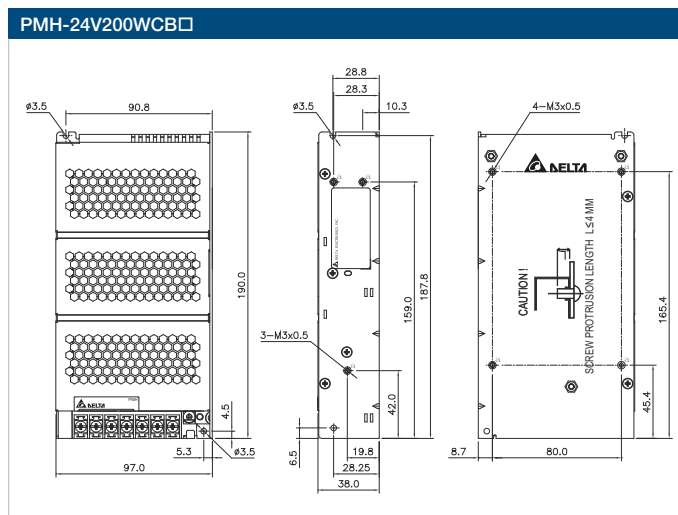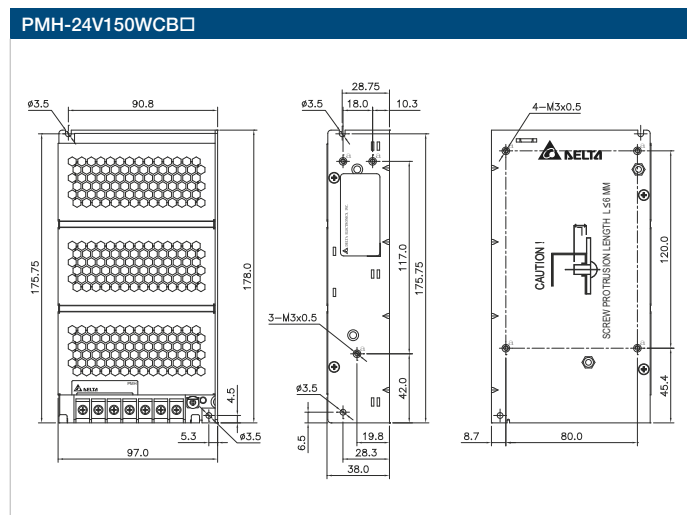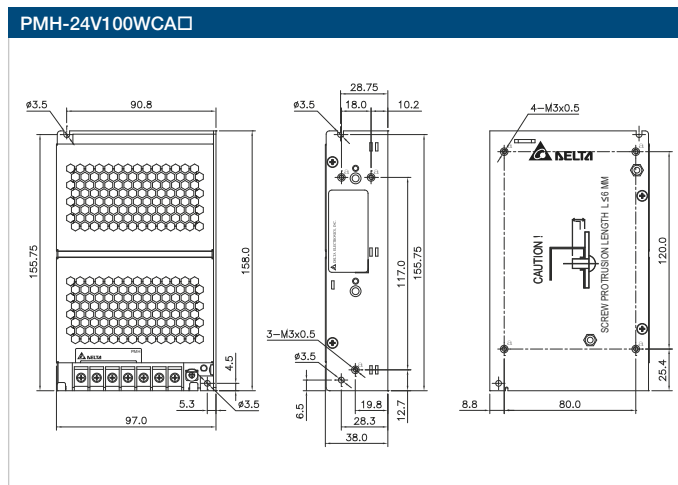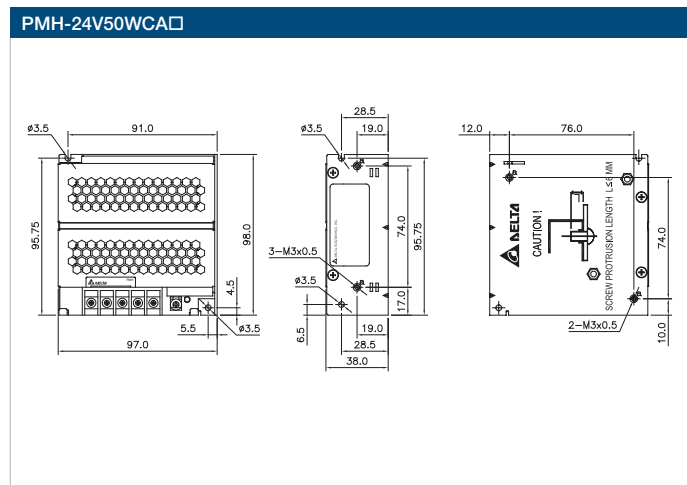

*Units in mm

	PMH-24V50WCA□	PMH-24V100WCA□	PMH-24V150WCB□	PMH-24V200WCB□
Input / Output Terminal	- PMH-24V50WCAA: M3.5 x 5 Pins (Rated 300V/15A) - PMH-24V50WCAJ: M3.5 x 5 Pins (Rated 300V/20A) - PMH-24V50WCAL: M3.5 x 5 Pins (Rated 300V/20A) - PMH-24V50WCAH: - I/P (JST): B3P(6-2.3.5)-VH(LF)(SN), - O/P (JST): B2P3-VH(LF)(SN)	- PMH-24V100WCAA: M3.5 x 7 Pins (Rated 300V/15A) - PMH-24V100WCAJ: M3.5 x 7 Pins (Rated 300V/20A) - PMH-24V100WCAL: M3.5 x 7 Pins (Rated 300V/20A) - PMH-24V100WCAH: - I/P (JST): B3P(6-2.3.5)-VH(LF)(SN), - O/P (JST): B4P7-VH(LF)(SN)	- PMH-24V150WCB A: M3.5 x 7 Pins (Rated 300V/15A) - PMH-24V150WCB J: M3.5 x 7 Pins (Rated 300V/20A) - PMH-24V150WCB L: M3.5 x 7 Pins (Rated 300V/20A) - PMH-24V150WCB H: - I/P (JST): B3P(6-2.3.5)-VH(LF)(SN), - O/P (JST): B4P7-VH(LF)(SN)	- PMH-24V200WCB A: M3.5 x 7 Pins (Rated 300V/15A) - PMH-24V200WCB J: M3.5 x 7 Pins (Rated 300V/20A) - PMH-24V200WCB L: M3.5 x 7 Pins (Rated 300V/20A) - PMH-24V200WCB H: - I/P (JST): B3P(6-2.3.5)-VH(LF)(SN), - O/P (JST): B4P7-VH(LF)(SN)
Input / Output Wire	- PMH-24V50WCAA: AWG 20-14 - PMH-24V50WCAJ: AWG 20-12 - PMH-24V50WCAL: AWG 20-12	- PMH-24V100WCAA: AWG 20-14 - PMH-24V100WCAJ: AWG 20-12 - PMH-24V100WCAL: AWG 20-12	- PMH-24V150WCB A: AWG 20-14 - PMH-24V150WCB J: AWG 20-12 - PMH-24V150WCB L: AWG 20-12	- PMH-24V200WCB A: AWG 20-14 - PMH-24V200WCB J: AWG 20-12 - PMH-24V200WCB L: AWG 20-12

PMR Panel Mount Power Supply

4.2V Output



PMR

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Full corrosion resistant aluminium casing
- Built-in active PFC and conforms to harmonic current IEC/EN 61000-3-2, Class A and Class D
- Low profile design for 1U installation
- Built-in DC OK relay contact and redundancy operation (PMR-4V320WDBA and PMR-4V320WDCA)

GENERAL SPECIFICATIONS

OUTPUT	PMR-4V320WC□A	PMR-4V320WDAA	PMR-4V320WDGA	PMR-4V320WDBA	PMR-4V320WDCA
Output Voltage	4.2V	4.2V	4.2V	4.2V	4.2V
Output Voltage Range	3.78-4.62V	3.78-4.62V	3.78-4.62V	3.99-4.51V (No potentiometer)	3.99-4.51V (No potentiometer)
Output Current	60.0A	60.0A	60.0A	60.0A	60.0A
Output Power	252W	252W	252W	252W	252W
Line Regulation	< 0.5%				
Load Regulation	< 1%			NA	
PARD (20MHz)	< 150mVpp				
Hold-up Time	8ms typ.				
INPUT					
Phase Input	Single Phase				
Input Voltage Range	88-264Vac				
Input Frequency	47-63Hz				
Input Current	3.00A typ. @ 115Vac, 1.50A typ. @ 230Vac	4.50A typ. @ 115Vac, 2.50A typ. @ 230Vac			
Efficiency ¹⁾ at 100% Load	80.5% typ. @ 115Vac, 83.5% typ. @ 230Vac	84.5% typ. @ 115Vac, 86.5% typ. @ 230Vac		84.0% typ. @ 115Vac, 86.0% typ. @ 230Vac	
Max Inrush Current (Cold Start)	20A typ. @ 115Vac, 40A typ. @ 230Vac				
Power Factor	0.98 typ. @ 115Vac, 0.95 typ. @ 230Vac				
Leakage Current	< 0.5mA @ 240Vac	< 1mA @ 240Vac			
MECHANICAL					
Case Cover / Chassis	Aluminium				
Dimensions (L x W x D)	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")
Unit Weight	0.76 kg (1.68 lb)	0.86 kg (1.90 lb)	0.86 kg (1.90 lb)	0.86 kg (1.90 lb)	0.86 kg (1.90 lb)
Cooling System	Forced Cooling	Convection			
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +70°C	-20°C to +70°C			
Storage Temperature	-40°C to +85°C				
Power De-rating	> 50°C (2.5% / °C)	> 40°C (1% / °C), > 50°C (1.5% / °C)			
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 5,000 m (0 tp 16,400 ft)				



Notes

1) At 25°C ambient temperature by vertical mounting orientation.

2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C). For PMR-4V320WC□A, MTBF calculation does not include fan life time.

3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

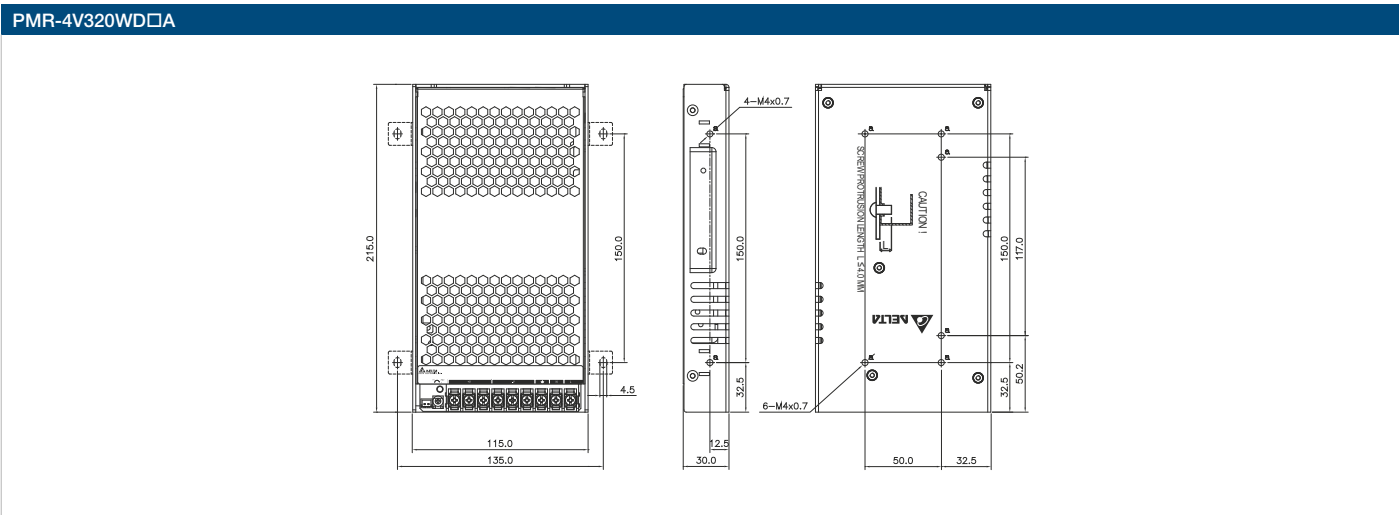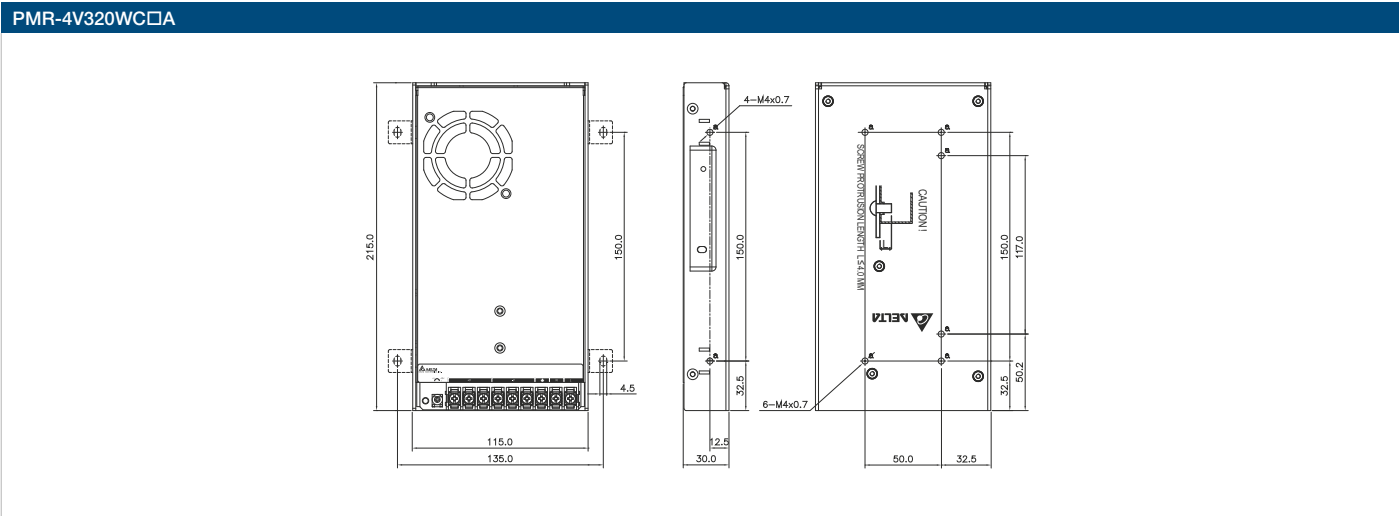

*Units in mm

	PMR-4V320WC□A	PMR-4V320WD□A
Input / Output Terminal	- PMR-4V320WCAA: M3.5 x 9 Pins (Rated 300V/15A) - PMR-4V320WCGA: M3.5 x 9 Pins (Rated 300V/20A)	- PMR-4V320WDAA, PMR-4V320WDBA: M3.5 x 9 Pins (Rated 300V/15A) - PMR-4V320WDGA, PMR-4V320WDCA: M3.5 x 9 Pins (Rated 300V/20A)
Input / Output Wire	- PMR-4V320WCAA: AWG 14-12** - PMR-4V320WCGA: AWG 14-12**	- PMR-4V320WDAA, PMR-4V320WDBA: AWG 14-12** - PMR-4V320WDGA, PMR-4V320WDCA: AWG 14-12**

**Only use wire that can withstand operating temperature of more than 125°C.

PMR Panel Mount Power Supply

5V Output



PMR

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Full corrosion resistant aluminium casing
- Built-in active PFC and conforms to harmonic current IEC/EN 61000-3-2, Class A and Class D
- Low profile design for 1U installation
- Built-in DC OK relay contact and redundancy operation (PMR-5V320WDBA and PMR-5V320WDCA)

GENERAL SPECIFICATIONS

OUTPUT	PMR-5V320WC□A	PMR-5V320WDAA	PMR-5V320WDGA	PMR-5V320WDBA	PMR-5V320WDCA
Output Voltage	5V	5V	5V	5V	5V
Output Voltage Range	4.50-5.50V	4.50-5.50V	4.50V-5.50V	4.75-5.25V (No potentiometer)	4.75-5.25V (No potentiometer)
Output Current	60.0A	60.0A	60.0A	60.0A	60.0A
Output Power	300W	300W	300W	300W	300W
Line Regulation	< 0.5%				
Load Regulation	< 1%			NA	
PARD (20MHz)	< 150mVpp				
Hold-up Time	8ms typ.				
INPUT					
Phase Input	Single Phase				
Input Voltage Range	88-264Vac				
Input Frequency	47-63Hz				
Input Current	4.50A typ. @ 115Vac, 2.50A typ. @ 230Vac	5.00A typ. @ 115Vac, 2.50A typ. @ 230Vac			
Efficiency ¹⁾ at 100% Load	81.0% typ. @ 115Vac, 84.0% typ. @ 230Vac	86.0% typ. @ 115Vac, 88.0% typ. @ 230Vac		85.0% typ. @ 115Vac, 87.0% typ. @ 230Vac	
Max Inrush Current (Cold Start)	20A typ. @ 115Vac, 40A typ. @ 230Vac				
Power Factor	0.98 typ. @ 115Vac, 0.95 typ. @ 230Vac				
Leakage Current	< 0.5mA @ 240Vac	< 1mA @ 240Vac			
MECHANICAL					
Case Cover / Chassis	Aluminium				
Dimensions (L x W x D)	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")	215 x 115 x 30 mm (8.46" x 4.53" x 1.18")
Unit Weight	0.76 kg (1.68 lb)	0.86 kg (1.90 lb)	0.86 kg (1.90 lb)	0.86 kg (1.90 lb)	0.86 kg (1.90 lb)
Cooling System	Forced Cooling	Convection			
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +70°C	-20°C to +70°C			
Storage Temperature	-40°C to +85°C				
Power De-rating	> 50°C (2.5% / °C)	> 40°C (1% / °C), > 50°C (1.5% / °C)			
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)				

Notes


1) At 25°C ambient temperature by vertical mounting orientation.

2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C). For PMR-5V320WC□A, MTBF calculation does not include fan life time.


3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

PMR-5V320WC□A

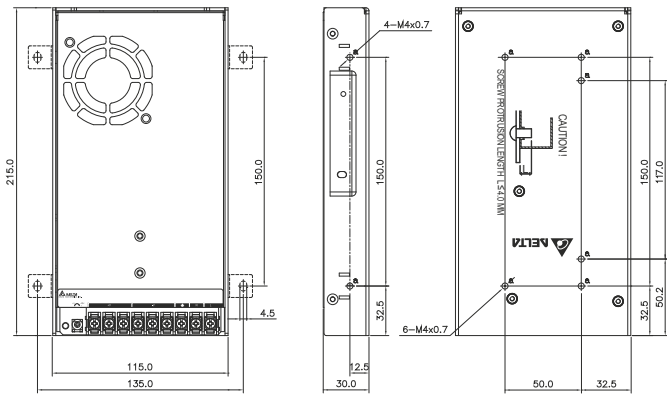

PMR-5V320WD□A

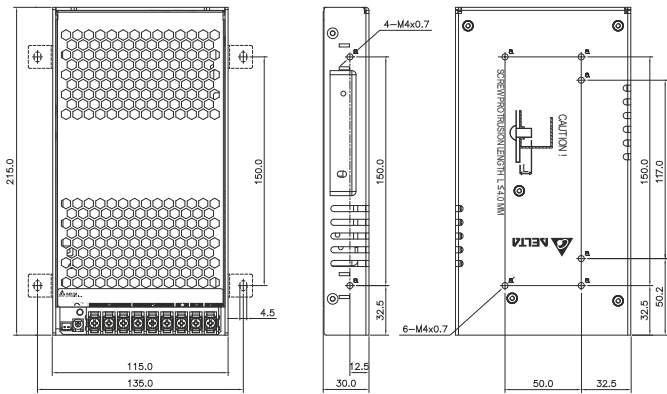

*Units in mm

	PMR-5V320WC□A	PMR-5V320WD□A
Input / Output Terminal	- PMR-5V320WCAA: M3.5 x 9 Pins (Rated 300V/15A) - PMR-5V320WCGA: M3.5 x 9 Pins (Rated 300V/20A)	- PMR-5V320WDAA, PMR-5V320WDBA: M3.5 x 9 Pins (Rated 300V/15A) - PMR-5V320WDGA, PMR-5V320WDCA: M3.5 x 9 Pins (Rated 300V/20A)
Input / Output Wire	- PMR-5V320WCAA: AWG 14-12** - PMR-5V320WCGA: AWG 14-12**	- PMR-5V320WDAA, PMR-5V320WDBA: AWG 14-12** - PMR-5V320WDGA, PMR-5V320WDCA: AWG 14-12**

**Only use wire that can withstand operating temperature of more than 125°C.

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply

PMT Panel Mount Power Supply

4.2V, 5V Output



PMT

HIGHLIGHTS & FEATURES

- AC input voltage selectable by switch (Universal AC input voltage for selected models)
- Conforms to harmonic current IEC/EN 61000-3-2, Class A for selected models
- High MTBF > 700,000 hrs per Telcordia SR-332
- Short Circuit / Overvoltage / Overload / Over Temperature Protections
- Versatile configuration options (for 35W and 50W):
 - L Frame
 - Enclosed

GENERAL SPECIFICATIONS


OUTPUT	PMT-4V350W1A□	PM□-5V35W1A□	PM□-5V50W1A□	PMT-5V350W1A□
Output Voltage	4.2V	5V	5V	5V
Output Voltage Range	3.78-4.70V	4.50-5.50V	4.50-5.50V	4.50-5.50V
Output Current	60.0A	7.00A	10.0A	60.0A
Output Power	252W	35W	50W	300W
Line Regulation	< 0.5%			
Load Regulation	< 2.5%	< 1%		< 2.5%
PARD (20MHz)	< 150mVpp	< 80mVpp		< 150mVpp
Hold-up Time	16ms typ. @ 115Vac, 20ms typ. @ 230Vac	20ms typ. @ 115Vac, 100ms typ. @ 230Vac		16ms typ. @ 115Vac, 20ms typ. @ 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	90-132Vac, 180-264Vac (Selectable by Switch)	85-264Vac		90-132Vac, 180-264Vac (Selectable by Switch)
Input Frequency	47-63Hz			
Input Current	7.00A typ. @ 115Vac, 4.00A typ. @ 230Vac	0.75A typ. @ 115Vac, 0.50A typ. @ 230Vac	1.10A typ. @ 115Vac, 0.65A typ. @ 230Vac	7.00A typ. @ 115Vac, 4.00A typ. @ 230Vac
Efficiency ¹⁾ at 100% Load	76.0% typ. @ 230Vac	81.0% typ. @ 230Vac	82.0% typ. @ 230Vac	78.0% typ. @ 230Vac
Max Inrush Current (Cold Start)	40A typ. @ 115Vac, 60A typ. @ 230Vac	45A typ. @ 230Vac		40A typ. @ 115Vac, 60A typ. @ 230Vac
Power Factor	NA	Conform to EN 61000-3-2		NA
Leakage Current	< 1mA @ 240Vac	< 0.5mA @ 240Vac	< 1mA @ 240Vac	
MECHANICAL				
Case Cover / Chassis	Aluminium	SGCC / Aluminium		Aluminium
Dimensions (L x W x D)	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")	98 x 98 x 38 mm (3.86" x 3.86" x 1.50")	98 x 98 x 38 mm (3.86" x 3.86" x 1.50")	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")
Unit Weight	0.81 kg (1.79 lb)	0.23 kg (0.51 lb)	0.23 kg (0.51 lb)	0.81 kg (1.79 lb)
Cooling System	Forced Cooling	Convection		Forced Cooling
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT				
Operating Temperature	-10°C to +70°C			
Storage Temperature	-25°C to +85°C			
Power De-rating	> 50°C (4% / °C); > 60°C (1% / °C)	> 50°C (2.5% / °C)		> 50°C (4% / °C); > 60°C (1% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)			

Notes


- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C). For PMT-4V350W1A□ and PMT-5V350W1A□ models, MTBF calculations do not include fan life time.
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

PM□-5V35W1A□, PM□-5V50W1A□

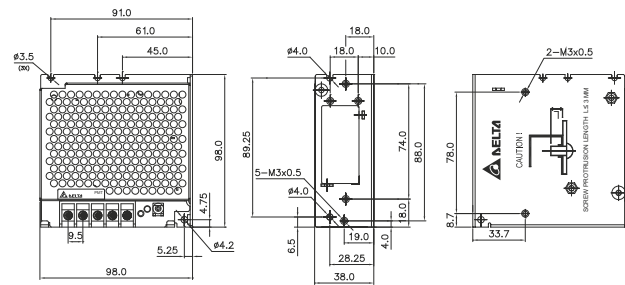

PMT-4V350W1A□, PMT-5V350W1A□

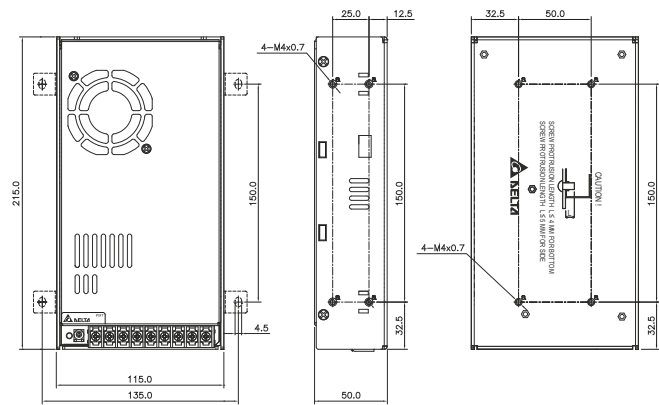

*Units in mm

	PMT-4V350W1A□	PM□-5V35W1A□	PM□-5V50W1A□	PMT-5V350W1A□
Input / Output Terminal	- PMT-4V350W1A□M: - M3.5 x 9 Pins (Rated 300V/15A) - PMT-4V350W1A□N: - M3.5 x 9 Pins (Rated 300V/20A)	- PM□-5V35W1A□A: - M3.5 x 5 Pins (Rated 300V/15A) - PM□-5V35W1A□G: - M3.5 x 5 Pins (Rated 300V/20A) - PM□-5V35W1A□H: - I/P (JST): - B3P5-VH(LF)(SN), - O/P (JST): - B2P3-VH (LF)(SN)	- PM□-5V50W1A□A: - M3.5 x 5 Pins (Rated 300V/15A) - PM□-5V50W1A□G: - M3.5 x 5 Pins (Rated 300V/20A)	- PMT-5V350W1A□M: - M3.5 x 9 Pins (Rated 300V/15A) - PMT-5V350W1A□N: - M3.5 x 9 Pins (Rated 300V/20A)
Input / Output Wire	AWG 14-12**	- PM□-5V35W1A□A: - AWG 18-12 - PM□-5V35W1A□G: - AWG 18-12 - PM□-5V35W1A□H: - AWG 18	- PM□-5V50W1A□A: - AWG 14-12 - PM□-5V50W1A□G: - AWG 14-12	AWG 14-12**

**Only use wire that can withstand operating temperature of more than 125°C.

PMT Panel Mount Power Supply

12V, 15V Output



PMT

HIGHLIGHTS & FEATURES



- AC input voltage selectable by switch (Universal AC input voltage for selected models)
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs per Telcordia SR-332
- Short Circuit / Overvoltage / Overload / Over Temperature Protections
- Versatile configuration options:
 - Open Frame (35W and 50W, except PM□-15V50W1A□)
 - L Frame
 - Enclosed

GENERAL SPECIFICATIONS

OUTPUT	PM□-12V35W1A□	PM□-12V50W1A□	PM□-12V100W1A□	PM□-12V150W1A□	PM□-15V50W1A□
Output Voltage	12V	12V	12V	12V	15V
Output Voltage Range	11-14V	11-14V	11.4-13.2V	11.4-13.5V	13.5-16.5V
Output Current	2.92A	4.17A	8.50A	12.5A	3.40A
Output Power	35W	50W	102W	150W	51W
Line Regulation	< 0.5%				
Load Regulation	< 1%		< 0.5%		
PARD (20MHz)	< 100mVpp		< 120mVpp		< 150mVpp
Hold-up Time	16.7ms typ. @ 115Vac		25ms typ. @ 115Vac, 30ms typ. @ 230Vac	20ms typ. @ 115Vac, 24ms typ. @ 230Vac	20ms typ. @115Vac, 100ms typ. @ 230Vac
INPUT					
Phase Input	Single Phase				
Input Voltage Range	90-264Vac		90-132Vac, 180-264Vac (Selectable by Switch)		85-264Vac
Input Frequency	47-63Hz				
Input Current	0.75A typ. @ 115Vac, 0.50A typ. @ 230Vac	1.10A typ. @ 115Vac, 0.70A typ. @ 230Vac	2.00A typ. @ 115Vac, 1.20A typ. @ 230Vac	3.00A typ. @ 115Vac, 2.00A typ. @ 230Vac	1.10A typ. @ 115Vac, 0.65A typ. @ 230Vac
Efficiency ¹⁾ at 100% Load	84.0% typ. @ 115Vac & 230Vac	83.0% typ. @ 115Vac & 230Vac	87.5% typ. @ 230Vac	86.0% typ. @ 230Vac	85.5% typ. @ 230Vac
Max Inrush Current (Cold Start)	30A typ. @ 115Vac, 60A typ. @ 230Vac	30A typ. @ 115Vac, 65A typ. @ 230Vac	36A typ. @ 230Vac	45A typ. @ 230Vac	
Power Factor	Conform to EN 61000-3-2				
Leakage Current	< 1mA @ 240Vac		< 0.5mA @ 240Vac		
MECHANICAL					
Case Cover / Chassis	SGCC / Aluminium				
Dimensions (L x W x D)	98 x 98 x 38 mm (3.86" x 3.86" x 1.50")	98 x 98 x 38 mm (3.86" x 3.86" x 1.50")	158 x 97 x 38 mm (6.22" x 3.82" x 1.50")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")	98 x 98 x 38 mm (3.86" x 3.86" x 1.50")
Unit Weight	0.22 kg (0.49 lb)	0.23 kg (0.51 lb)	0.36 kg (0.79 lb)	0.48 kg (1.06 lb)	0.23 kg (0.51 lb)
Cooling System	Convection				
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +70°C				
Storage Temperature	-25°C to +85°C				
Power De-rating	> 50°C (2.5% / °C)				
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)				

Notes

- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C).
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

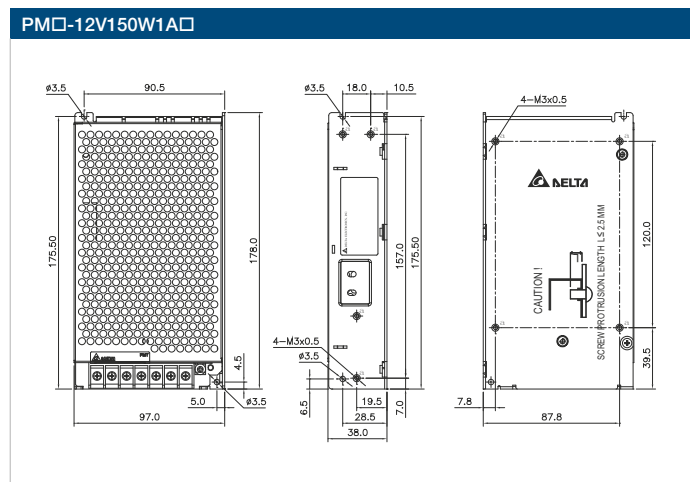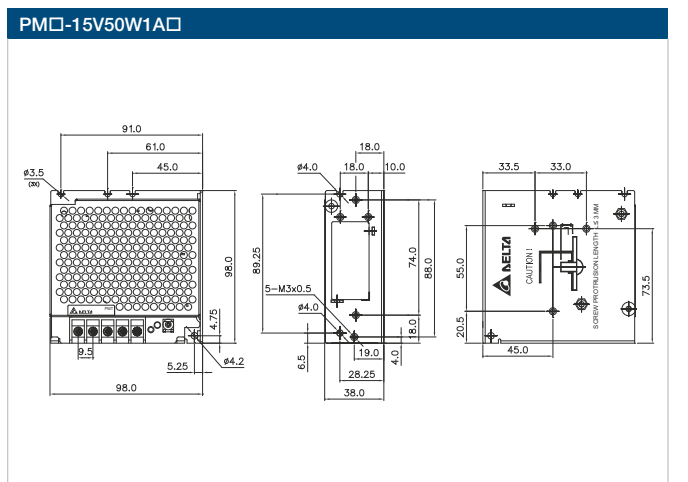[illegible]

69

PMT Panel Mount Power Supply

24V Output



PMT

HIGHLIGHTS & FEATURES

- AC input voltage selectable by switch (Universal AC input voltage for selected models)
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs per Telcordia SR-332
- Short Circuit / Overvoltage / Overload / Over Temperature Protections
- Versatile configuration options:
 - Open Frame (35W and 50W)
 - L Frame
 - Enclosed

GENERAL SPECIFICATIONS

OUTPUT	PM□-24V35W1A□	PM□-24V50W1A□	PM□-24V100W1A□	PM□-24V150W1A□
Output Voltage	24V	24V	24V	24V
Output Voltage Range	22-28V	22-28V	22.8-26.4V	22.8-27.6V
Output Current	1.46A	2.10A	4.50A	6.50A
Output Power	35W	50W	108W	156W
Line Regulation	< 0.5%			
Load Regulation	< 1%		< 0.5%	
PARD (20MHz)	< 100mVpp		< 120mVpp	
Hold-up Time	16.7ms typ. @ 115Vac		25ms typ. @ 115Vac, 30ms typ. @ 230Vac	20ms typ. @ 115Vac, 24ms typ. @ 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	90-264Vac		90-132Vac, 180-264Vac (Selectable by Switch)	
Input Frequency	47-63Hz			
Input Current	0.75A typ. @ 115Vac, 0.50A typ. @ 230Vac	1.10A typ. @ 115Vac, 0.65A typ. @ 230Vac	2.00A typ. @ 115Vac, 1.20A typ. @ 230Vac	3.00A typ. @ 115Vac, 2.00A typ. @ 230Vac
Efficiency ¹⁾ at 100% Load	85.0% typ. @ 115Vac & 230Vac	86.0% typ. @ 115Vac & 230Vac	89.0% typ. @ 230Vac	
Max Inrush Current (Cold Start)	30A typ. @ 115Vac, 60A typ. @ 230Vac		36A typ. @ 230Vac	45A typ. @ 230Vac
Power Factor	Conform to EN 61000-3-2			
Leakage Current	< 1mA @ 240Vac		< 0.5mA @ 240Vac	
MECHANICAL				
Case Cover / Chassis	SGCC / Aluminium			
Dimensions (L x W x D)	98 x 98 x 38 mm (3.86" x 3.86" x 1.50")	98 x 98 x 38 mm (3.86" x 3.86" x 1.50")	158 x 97 x 38 mm (6.22" x 3.82" x 1.50")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")
Unit Weight	0.22 kg (0.49 lb)	0.24 kg (0.53 lb)	0.36 kg (0.79 lb)	0.48 kg (1.06 lb)
Cooling System	Convection			
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT				
Operating Temperature	-10°C to +70°C			
Storage Temperature	-25°C to +85°C			
Power De-rating	> 50°C (2.5% / °C)			
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)			

Notes

- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C).
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

Technical drawing of the PM□-24V100W1A□ LED module, showing three views: front, side, and top.

Front View: Dimensions include 155.75 (height), 89.5 (width), 97.0 (bottom width), 5.0 (bottom offset), 4.5 (bottom offset), and mounting holes (3-M3x0.5).

Side View: Dimensions include 155.75 (height), 117.0 (height), 18.0 (width), 10.5 (width), 38.0 (width), 28.5 (width), 19.0 (width), 12.7 (width), 6.5 (width), and mounting holes (3-M3x0.5).

Top View: Dimensions include 120.0 (height), 61.0 (width), 78.0 (height), 22.5 (height), 7.5 (height), 31.5 (width), 21.4 (width), 25.4 (width), and a central screw hole (6-M3x0.5). A caution label is present, indicating "CAUTION!" and "SCREW PROTRUSION LENGTH ≤ 1.5 MM".

Technical drawing of the PM□-24V150W1A□ power supply unit, showing three views: front, side, and top.

Front View Dimensions:

- Width: 90.5 mm
- Height: 176.5 mm
- Bottom Mounting Hole Spacing: 97.0 mm
- Bottom Mounting Hole Diameter: $\phi 3.5$
- Bottom Mounting Hole Spacing (Inner): 5.0 mm
- Bottom Mounting Hole Spacing (Outer): 4.5 mm

Side View Dimensions:

- Depth: 18.0 mm
- Total Height: 176.5 mm
- Mounting Hole Diameter: $\phi 3.5$
- Mounting Hole Spacing (Inner): 19.5 mm
- Mounting Hole Spacing (Outer): 28.5 mm
- Mounting Hole Spacing (Total): 38.0 mm

Top View Dimensions:

- Width: 87.8 mm
- Height: 120.0 mm
- Mounting Hole Diameter: $\phi 3.5$
- Mounting Hole Spacing (Inner): 19.5 mm
- Mounting Hole Spacing (Outer): 28.5 mm
- Mounting Hole Spacing (Total): 38.0 mm

Notes:

- 4-M3x0.5 (Mounting holes)
- CAUTION! SCREW PROTRUSION LENGTH ≤ 2.5 MM

	PM□-24V35W1A□	PM□-24V50W1A□	PM□-24V100W1A□	PM□-24V150W1A□
Input / Output Terminal	- PM□-24V35W1AA: M3.5 x 5 Pins (Rated 300V/15A) - PM□-24V35W1AG: M3.5 x 5 Pins (Rated 300V/20A) - PM□-24V35W1AH: I/P (JST): B3P5-VH(LF)(SN), O/P (JST): B2P3-VH(LF)(SN)	- PM□-24V50W1AA: M3.5 x 5 Pins (Rated 300V/15A) - PM□-24V50W1AG: M3.5 x 5 Pins (Rated 300V/20A) - PM□-24V50W1AH: I/P (JST): B3P5-VH(LF)(SN), O/P (JST): B2P3-VH(LF)(SN)	- PM□-24V100W1AA: M3.5 x 7 Pins (Rated 300V/15A) - PM□-24V100W1AG: M3.5 x 7 Pins (Rated 300V/20A) - PM□-24V100W1AH: I/P (JWT): A3963WV2-5P-A, O/P (JWT): A3963WV2-7P-U	- PM□-24V150W1AA: M3.5 x 7 Pins (Rated 300V/15A) - PM□-24V150W1AG: M3.5 x 7 Pins (Rated 300V/20A) - PM□-24V150W1AH: I/P (JWT): A3963WV2-5P-A, O/P (JWT): A3963WV2-7P-U
Input / Output Wire	- PM□-24V35W1AA: AWG 22-12 - PM□-24V35W1AG: AWG 22-12 - PM□-24V35W1AH: AWG 22-18	- PM□-24V50W1AA: AWG 22-12 - PM□-24V50W1AG: AWG 22-12 - PM□-24V50W1AH: AWG 22-18	- PM□-24V100W1AA: AWG 22-12 - PM□-24V100W1AG: AWG 22-12 - PM□-24V100W1AH: AWG 22-18	- PM□-24V150W1AA: AWG 22-12 - PM□-24V150W1AG: AWG 22-12 - PM□-24V150W1AH: AWG 22-18

PMT Panel Mount Power Supply

24V Output



PMT

HIGHLIGHTS & FEATURES

- AC input voltage selectable by switch
- Full corrosion resistant aluminium casing
- High Efficiency > 87.0% @ 230Vac
- High MTBF > 700,000 hrs per Telcordia SR-332
- Short Circuit / Overvoltage / Overload / Over Temperature Protections
- Versatile configuration options (for 200W):
 - L Frame
 - Enclosed




GENERAL SPECIFICATIONS

OUTPUT	PM□-24V200W1A□	PMT-24V350W1AG	PMT-24V350W1AM	PMT-24V350W1AK	PMT-24V350W1AR
Output Voltage	24V	24V	24V	24V	24V
Output Voltage Range	21.6-26.4V	20.0-26.4V	20.0-26.4V	20.0-26.4V	20.0-26.4V
Output Current	8.80A	14.6A	14.6A	14.6A	14.6A
Output Power	211.2W	350.4W	350.4W	350.4W	350.4W
Line Regulation	< 0.5%				
Load Regulation	< 0.5%				
PARD (20MHz)	< 150mVpp				
Hold-up Time	20ms typ. @ 115Vac, 24ms typ. @ 230Vac	16ms typ. @ 115Vac, 20ms typ. @ 230Vac			
INPUT					
Phase Input	Single Phase				
Input Voltage Range	90-132Vac, 180-264Vac (Selectable by Switch)				
Input Frequency	47-63Hz				
Input Current	4.50A typ. @ 115Vac, 2.50A typ. @ 230Vac	7.00A typ. @ 115Vac, 4.00A typ. @ 230Vac	7.00A typ. @ 115Vac, 4.00A typ. @ 230Vac	7.00A typ. @ 115Vac, 4.00A typ. @ 230Vac	7.00A typ. @ 115Vac, 4.00A typ. @ 230Vac
Efficiency ¹⁾ at 100% Load	88.5% typ. @ 230Vac	87.0% typ. @ 230Vac			
Max Inrush Current (Cold Start)	55A typ. @ 230Vac	50A typ. @ 115Vac, 60A typ. @ 230Vac			
Power Factor	NA				
Leakage Current	< 0.25mA @ 240Vac	< 3.5mA @ 240Vac			
MECHANICAL					
Case Cover / Chassis	Aluminium				
Dimensions (L x W x D)	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")
Unit Weight	0.63 kg (1.39 lb)	0.82 kg (1.81 lb)	0.82 kg (1.81 lb)	0.82 kg (1.81 lb)	0.82 kg (1.81 lb)
Cooling System	Convection	Forced Cooling			
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +60°C	-10°C to +70°C			
Storage Temperature	-25°C to +85°C				
Power De-rating	> 40°C (2.5% / °C)	> 50°C (2.5% / °C)			
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)				

Notes

- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C). For PMT-24V350W1AG, PMT-24V350W1AK and PMT-36V350W1A□ models, MTBF calculations do not include fan life time.
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

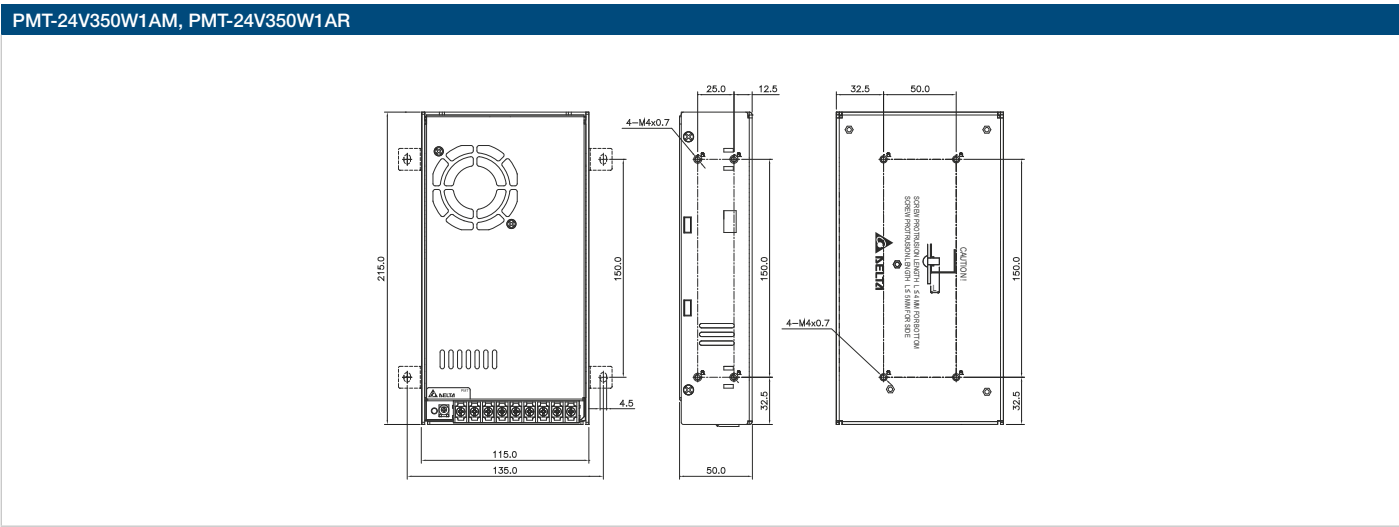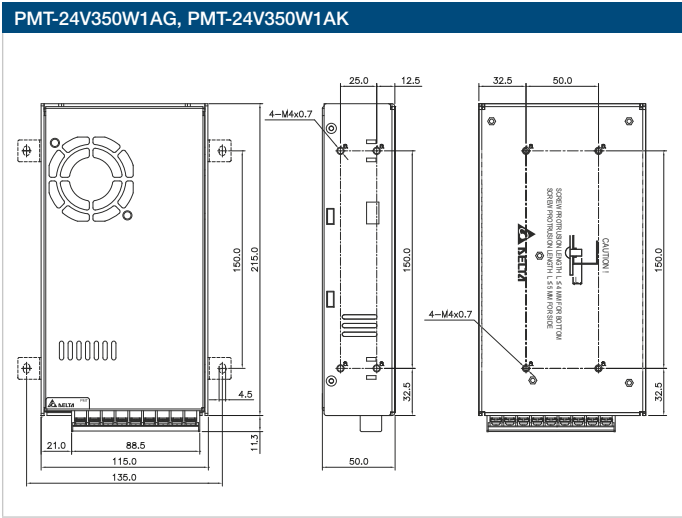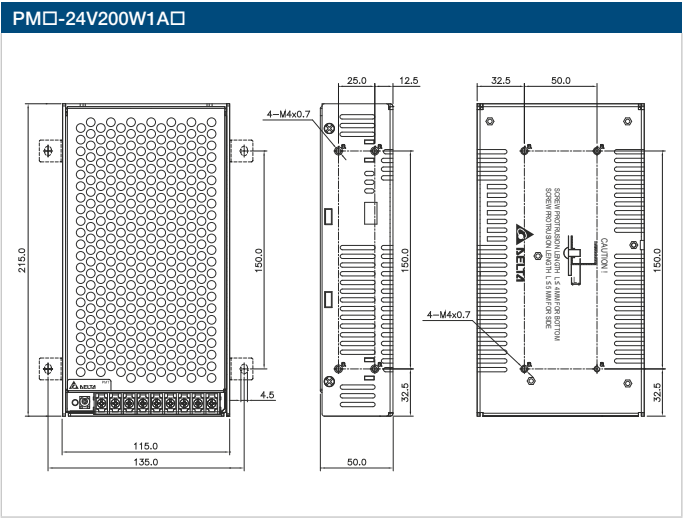

*Units in mm

	PM□-24V200W1A□	PMT-24V350W1AG	PMT-24V350W1AM	PMT-24V350W1AK	PMT-24V350W1AR
Input / Output Terminal	- PM□-24V200W1AM: M3.5 x 9 Pins (Rated 300V/15A) - PM□-24V200W1AN: M3.5 x 9 Pins (Rated 300V/20A)	M3.5 x 9 Pins (Rated 300V/20A)	M3.5 x 9 Pins (Rated 300V/15A)	M3.5 x 9 Pins (Rated 300V/20A)	M3.5 x 9 Pins (Rated 300V/15A)
Input / Output Wire	AWG 22-12	AWG 20-12	AWG 20-12	AWG 20-12	AWG 20-12

PMT Panel Mount Power Supply

36V, 48V, Dual Output



PMT

HIGHLIGHTS & FEATURES

- AC input voltage selectable by switch
- Conforms to harmonic current IEC/EN 61000-3-2, Class A for selected models
- High MTBF > 700,000 hrs per Telcordia SR-332
- Short Circuit / Overvoltage / Overload / Over Temperature Protections
- Versatile configuration options:
 - L Frame
 - Enclosed

GENERAL SPECIFICATIONS


OUTPUT	PMT-36V350W1A□	PM□-48V150W1A□	PMT-48V350W1A□	PM□-D1V100W1A□	PM□-D2V100W1A□
Output Voltage	36V	48V	48V	V1: 12V, V2: 5V	V1: 24V, V2: 5V
Output Voltage Range	32.4-39.6V	45.6-52.8V	43.2-52.8V	V1: 10.8-13.2	V1: 21.6-26.4V
Output Current	9.70A	3.30A	7.30A	V1: 7.00A, V2: 3.00A	V1: 3.50A, V2: 3.00A
Output Power	349.2W	158.4W	350W	V1: 84W, V2: 15W	V1: 84W, V2: 15W
Line Regulation	< 0.5%				
Load Regulation	< 1%	< 0.5 %	< 1%	V1: < 1%, V2: < 2%	V1: < 1%, V2: < 2%
PARD (20MHz)	< 240mVpp	< 200mVpp	< 240mVpp	V1: 120mVpp, V2: 80mVpp	V1: 120mVpp, V2: 80mVpp
Hold-up Time	16ms typ. @ 115Vac, 20ms typ. @ 230Vac	20ms typ. @ 115Vac, 24ms typ. @ 230Vac	16ms typ. @ 115Vac, 20ms typ. @ 230Vac	20ms typ. @ 115Vac, 25ms typ. @ 230Vac	
INPUT					
Phase Input	Single Phase				
Input Voltage Range	90-132Vac, 180-264Vac (Selectable by Switch)			88-132Vac, 176-264Vac (Selectable by Switch)	
Input Frequency	47-63Hz				
Input Current	7.00A typ. @ 115Vac, 4.00A typ. @ 230Vac	3.00A typ. @ 115Vac, 2.00A typ. @ 230Vac	7.00A typ. @ 115Vac, 4.00A typ. @ 230Vac	2.00A typ. @ 115Vac, 1.20A typ. @ 230Vac	2.00A typ. @ 115Vac, 1.20A typ. @ 230Vac
Efficiency ¹⁾ at 100% Load	87.5% typ. @ 230Vac	89.0% typ. @ 230Vac	87.5% typ. @ 230Vac	82.0% typ. @ 230Vac	84.0% @ 230Vac
Max Inrush Current (Cold Start)	40A typ. @ 115Vac, 60A typ. @ 230Vac	45A typ. @ 230Vac	40A typ. @ 115Vac, 60A typ. @ 230Vac	45A typ. @ 230Vac	
Power Factor	NA	Conform to EN 61000-3-2	NA	Conform to EN 61000-3-2	
Leakage Current	< 3.5mA @ 240Vac	< 0.5mA @ 240Vac	< 3.5mA @ 240Vac	< 0.25mA @ 240Vac	
MECHANICAL					
Case Cover / Chassis	Aluminium	SGCC / Aluminium	Aluminium	SGCC / Aluminium	SGCC / Aluminium
Dimensions (L x W x D)	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")	215 x 115 x 50 mm (8.46" x 4.53" x 1.97")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")	178 x 97 x 38 mm (7.01" x 3.82" x 1.50")
Unit Weight	0.83 kg (1.83 lb)	0.48 kg (1.06 lb)	0.83 kg (1.83 lb)	0.45 kg (0.99 lb)	0.42 kg (0.93 lb)
Cooling System	Forced Cooling	Convection	Forced Cooling	Convection	
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +70°C				
Storage Temperature	-25°C to +85°C				
Power De-rating	> 50°C (2.5% / °C)				
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)				

Notes


- 1) At 25°C ambient temperature by vertical mounting orientation.
- 2) MTBF as per Telcordia SR-332 (Confidence level: 90%, I/P: 100Vac, O/P: 100% load, Ta: 35°C). For PMT-48V350W1A□ models, MTBF calculations does not include fan life time.
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

PM□-48V150W1A□, PM□-D1V100W1A□, PM□-D2V100W1A□

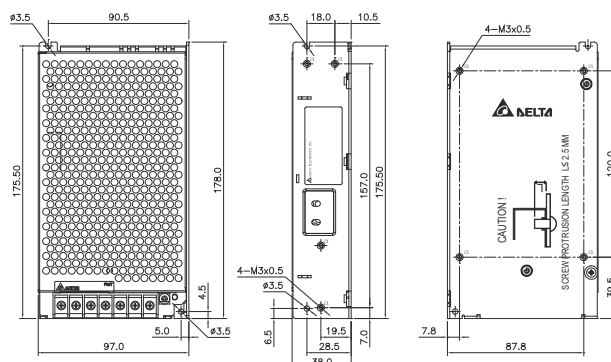

PMT-36V350W1A□, PMT-48V350W1A□

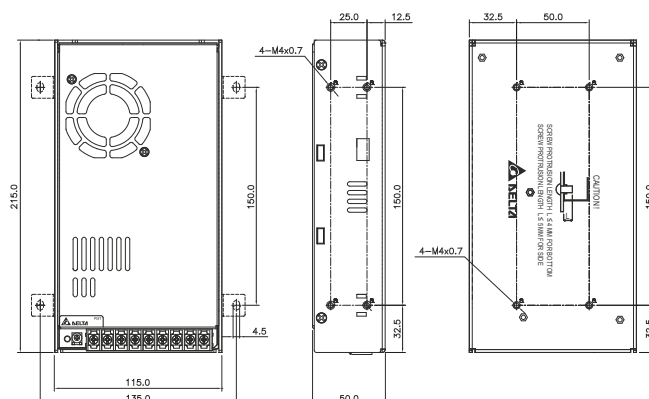

*Units in mm

	PMT-36V350W1A□	PM□-48V150W1A□	PMT-48V350W1A□	PM□-D1V100W1A□	PM□-D2V100W1A□
Input / Output Terminal	- PMT-36V350W1A<u>R</u>: M3.5 x 9 Pins (Rated 300V/15A) - PMT-36V350W1A<u>K</u>: M3.5 x 9 Pins (Rated 300V/20A)	- PM□-48V150W1A<u>A</u>: M3.5 x 7 Pins (Rated 300V/15A) - PM□-48V150W1A<u>G</u>: M3.5 x 7 Pins (Rated 300V/20A) - PM□-48V150W1A<u>H</u>: I/P (JWT): A3963WV2-5P-A, O/P (JWT): A3963WV2-7P-U	- PMT-48V350W1A<u>R</u>: M3.5 x 9 Pins (Rated 300V/15A) - PMT-48V350W1A<u>K</u>: M3.5 x 9 Pins (Rated 300V/20A)	- PM□-D1V100W1A<u>A</u>: M3.5 x 7 Pins (Rated 300V/15A) - PM□-D1V100W1A<u>G</u>: M3.5 x 7 Pins (Rated 300V/20A) - PM□-D1V100W1A<u>H</u>: I/P (JWT): A3963WV2-5P-A, O/P (JWT): A3963WV2-7P-U	- PM□-D2V100W1A<u>A</u>: M3.5 x 7 Pins (Rated 300V/15A) - PM□-D2V100W1A<u>G</u>: M3.5 x 7 Pins (Rated 300V/20A) - PM□-D2V100W1A<u>H</u>: I/P (JWT): A3963WV2-5P-A, O/P (JWT): A3963WV2-7P-U
Input / Output Wire	AWG 22-12	- PM□-48V150W1A<u>A</u>: AWG 22-12 - PM□-48V150W1A<u>G</u>: AWG 22-12 - PM□-48V150W1A<u>H</u>: AWG 22-18	AWG 22-12	- PM□-D1V100W1A<u>A</u>: AWG 22-12 - PM□-D1V100W1A<u>G</u>: AWG 22-12 - PM□-D1V100W1A<u>H</u>: AWG 22-18	- PM□-D1V100W1A<u>A</u>: AWG 22-12 - PM□-D1V100W1A<u>G</u>: AWG 22-12 - PM□-D1V100W1A<u>H</u>: AWG 22-18

Standard Products

Open Frame Power Supply

PJ



The PJ open frame power supply series offers the most widely used output voltages of 5V, 12V, 24V and 48V with power ratings from 15W to 150W. These power supplies come with universal AC input from 85Vac to 264Vac and wide operating temperature range of -10°C to +70°C. The features include low leakage and low Inrush current while the conformal coating on the PCBAs provides protection against common dust and chemical pollutants. The products are certified to EMI standards according to EN 55022 for Information Technology Equipment (ITE) radio-frequency equipment; EMS according to EN 55024. In order to ensure the highest standard of reliability, only recognized Japanese connectors and capacitors are used and options for metal chassis and case cover are available for different installation preferences. The remote ON/OFF feature is available for output power at 100W and above.

Typical Applications



PJB




The PJB open frame power supply series is designed for applications demanding low leakage current, low inrush current, high power factor value and high efficiency. The PJB series comes with universal AC input voltage range at 85Vac to 264Vac and bears superior features like built-in Power Boost of 200% for 10 seconds which will enable reserved power to be always available during startup of loads with high inrush current, thus, eliminating the need of a more expensive power supply with higher power rating while saving more space for installation. Like its predecessor, the PJ series, the PJB series has conformal coating applied on the PCBAs to protect against common dust and chemical pollutants. This enables the products to be used in harsh industrial environments and only recognized Japanese capacitors are used. Metal chassis and case cover are available as options for different installation preferences. The PJB series is certified for EMI standards according to EN 55022 and EMS according to EN 55024. The products also conform to major international safety standards according to IEC/EN/UL 60950-1 standards.

Typical Applications




PJT

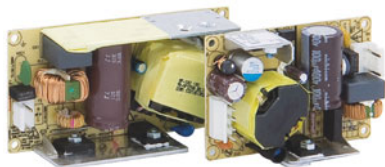


The PJT open frame power supply series offers nominal output voltages of 12V, 15V, 18V and 24V. The PJT series comes with open frame standard footprint of 2"x3", 2"x4" and 3"x5" with universal AC input voltage range at 90Vac to 264Vac. The product features low earth leakage current and built-in active PFC circuit for lower energy consumption. Delta's PJT series of open frame power supplies can meet the price demand of cost competitive markets without compromising the quality of the components. The series is certified for EMI standards according to EN 55022 and conforms to major international safety standards according to IEC/EN/UL 60950-1 standards.

Typical Applications



Configuration Options

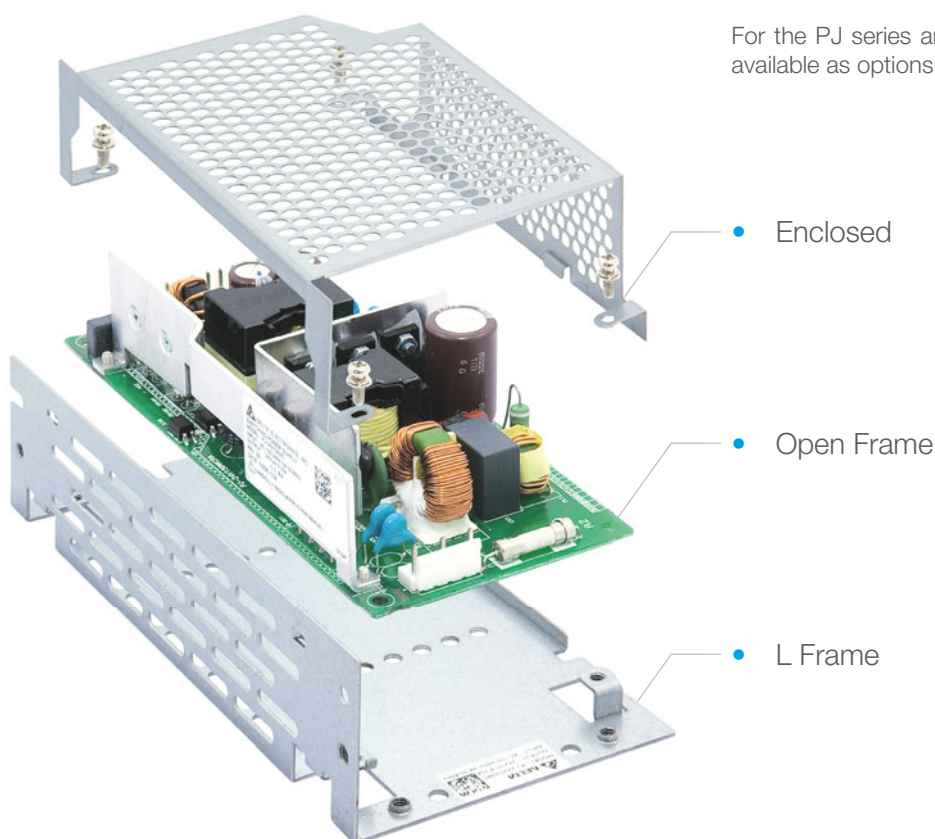


For the PJ series and PJB series, metal chassis and case cover are available as options for different installation preferences.

All Delta power supplies are fully compliant with RoHS Directive 2011/65/EU for environmental protection. For more information or enquiries, please do not hesitate to contact your local Delta Electronics distributor or visit www.DeltaPSU.com.

PJ Open Frame Power Supply

12V Output

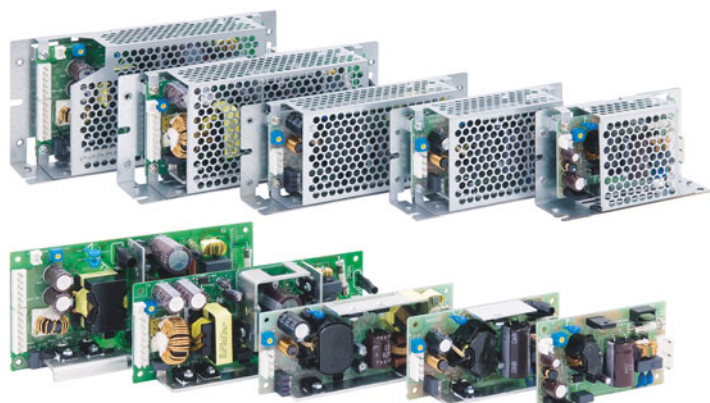

PJ

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- High PF > 0.97 (for 50W and above)
- Low Inrush Current / Low Leakage Current
- Conforms to harmonic current IEC/EN 61000-3-2, Class A; Class A and Class D for 50W and above
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Versatile configuration options: Open Frame, L Frame, Enclosed
- Remote ON/OFF option for selected models
- Long life capacitors

GENERAL SPECIFICATIONS


OUTPUT	PJ-12V15W□□A	PJ-12V30W□□A	PJ-12V50W□□A	PJ-12V100W□□A	PJ-12V150W□□A
Output Voltage	12V	12V	12V	12V	12V
Output Voltage Range	10.8-13.2V	10.8-13.2V	10.8-13.2V	10.8-13.2V	10.8-13.2V
Output Current	1.30A	2.50A	4.30A	8.50A	12.5A
Output Power	15.6W	30W	51.6W	102W	150W
Line Regulation	< 48mV				
Load Regulation	< 100mV				
PARD (20MHz)	< 150mVpp				
Hold-up Time	20ms typ. @ 100Vac				
INPUT					
Phase Input	Single Phase				
Input Voltage Range	85-264Vac				
Input Frequency	47-63Hz				
Input Current	0.35A typ. @ 100Vac, 0.20A typ. @ 200Vac	0.65A typ. @ 100Vac, 0.35A typ. @ 200Vac	0.65A typ. @ 100Vac, 0.35A typ. @ 200Vac	1.30A typ. @ 100Vac, 0.65A typ. @ 200Vac	1.90A typ. @ 100Vac, 0.95A typ. @ 200Vac
Efficiency ¹⁾ at 100% Load	81.0% typ. @ 100Vac, 82.5% typ. @ 200Vac	83.0% typ. @ 100Vac, 85.0% typ. @ 200Vac	83.0% typ. @ 100Vac, 85.0% typ. @ 200Vac	85.0% typ. @ 100Vac, 87.5% typ. @ 200Vac	88.0% typ. @ 100Vac, 91.0% typ. @ 200Vac
Max Inrush Current (Cold Start)	15A typ. @ 100Vac, 30A typ. @ 200Vac				
Power Factor	Conform to EN 61000-3-2		0.98 typ. @ 100Vac, 0.97 typ. @ 200Vac	0.99 typ. @ 100Vac, 0.98 typ. @ 200Vac	0.99 typ. @ 100Vac, 0.97 typ. @ 200Vac
Leakage Current	< 0.1mA @ 100Vac, < 0.2mA @ 240Vac			< 0.2mA @ 100Vac, < 0.4mA @ 240Vac	
MECHANICAL					
Case Cover / Chassis	SGCC				
Dimensions (L x W x D) ²⁾	87.5 x 50 x 22 mm (3.44" x 1.97" x 0.87")	105 x 50 x 25.6 mm (4.13" x 1.97" x 1.01")	132 x 50 x 26.6 mm (5.20" x 1.97" x 1.05")	155 x 62 x 33.5 mm (6.10" x 2.44" x 1.32")	160 x 75 x 37 mm (6.30" x 2.95" x 1.46")
Unit Weight ²⁾	0.06 kg (0.13 lb)	0.11 kg (0.24 lb)	0.16 kg (0.35 lb)	0.26 kg (0.57 lb)	0.30 kg (0.66 lb)
Cooling System	Convection				
Input Terminal	(JST): B3P5-VH(LF)(SN)				
Output Terminal	(JST): B2P-VH(LF)(SN)	(JST): B4P-VH(LF)(SN)		(JST): B8P-VH(LF)(SN)	V- (JST): B7P-VH(LF)(SN), V+ (JST): B6P-VH(LF)(SN)
Input / Output Wire	AWG 22-18	AWG 22-18	AWG 22-18	AWG 22-18	AWG 22-18
MTBF ³⁾	> 200,000 hrs	> 200,000 hrs	> 200,000 hrs	> 200,000 hrs	> 200,000 hrs
ENVIRONMENT					
Operating Temperature	-10°C to +70°C				
Storage Temperature	-25°C to +75°C				
Power De-rating ²⁾	> 50°C (2.5% / °C)				> 50°C (2% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)				
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)				

Notes


- 1) At 25°C ambient temperature.
- 2) Open Frame (without chassis and cover).
- 3) MTBF as per JEITA RCR-9102B.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS


PJ-12V15W□NA

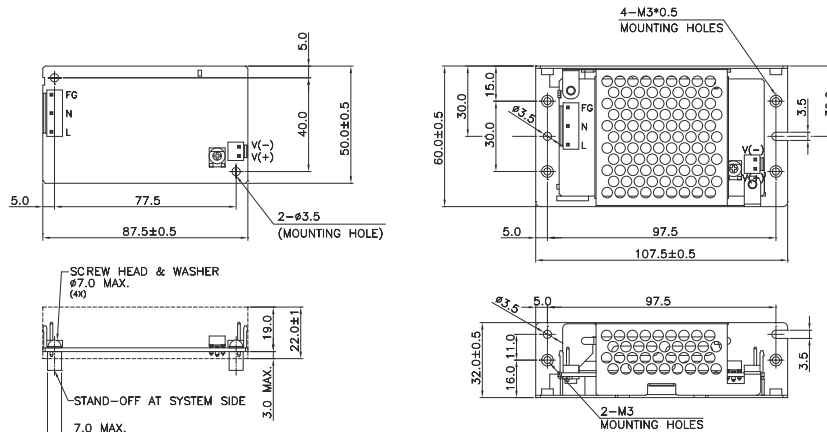

PJ-12V30W□NA

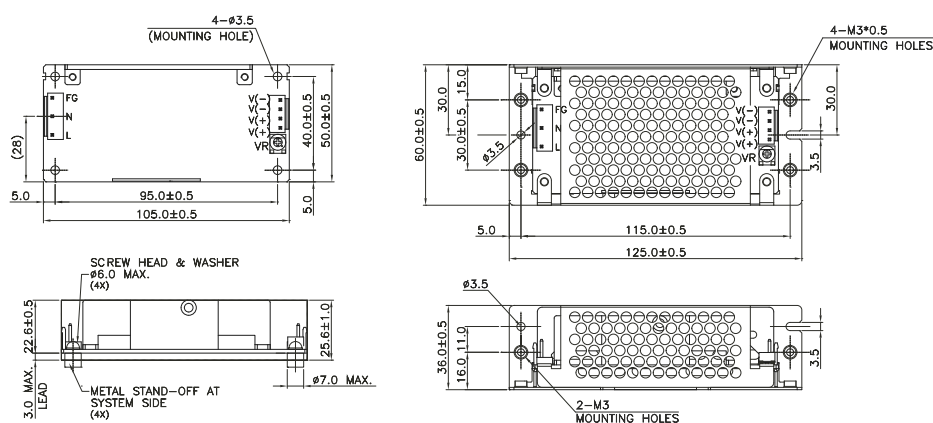


PJ-12V50W□NA

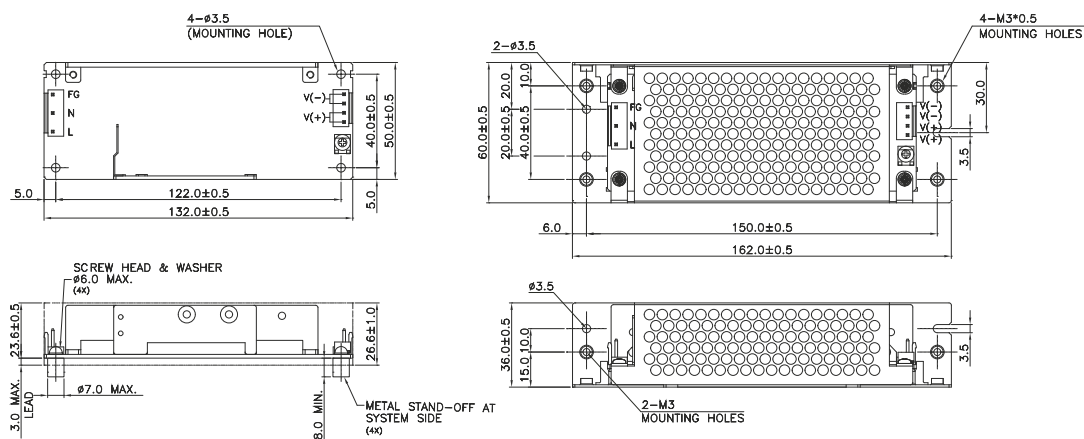


*Units in mm

MECHANICAL DRAWINGS

PJ-12V100W□□A

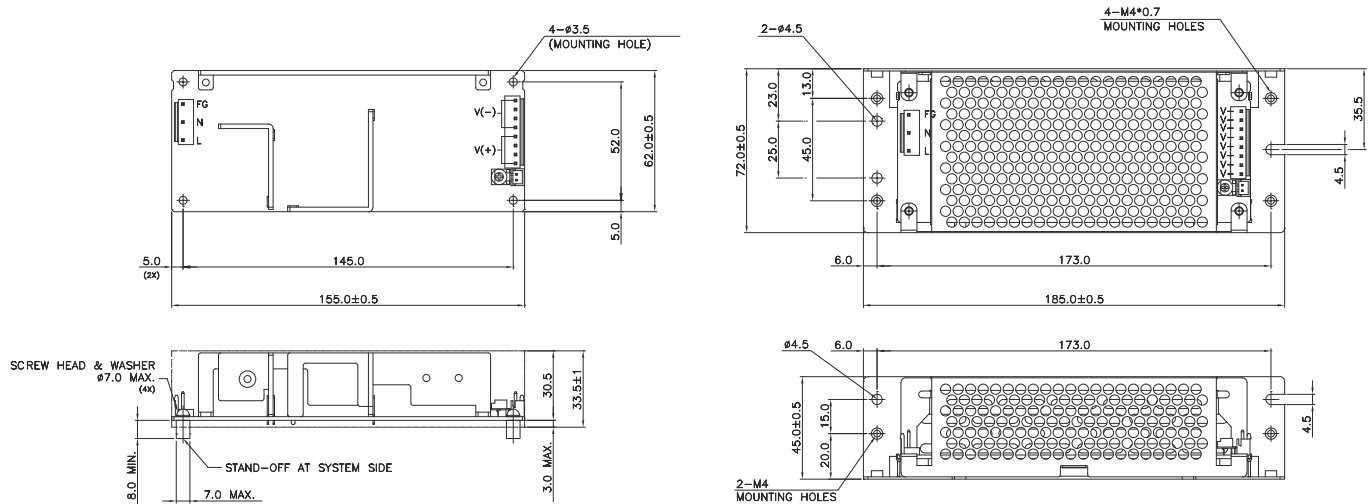


PJ-12V150W□□A

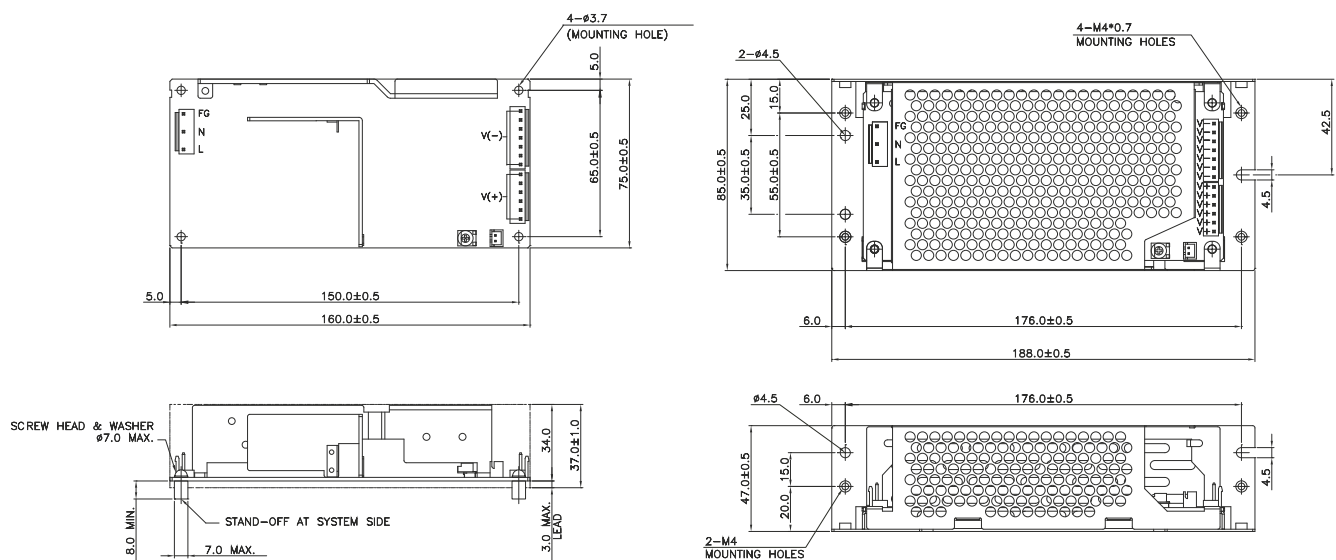

*Units in mm

PJ Open Frame Power Supply

24V Output

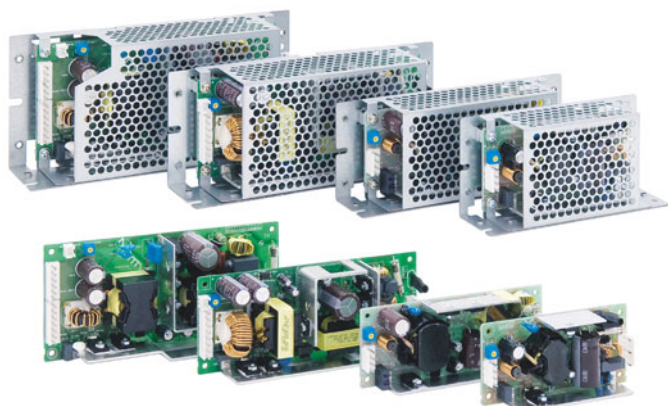

PJ

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- High PF > 0.97 (for 50W and above)
- Low Inrush Current / Low Leakage Current
- Conforms to harmonic current IEC/EN 61000-3-2, Class A; Class A and Class D for 50W and above
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Versatile configuration options: Open Frame, L Frame, Enclosed
- Remote ON/OFF option for selected models
- Long life capacitors

GENERAL SPECIFICATIONS


OUTPUT	PJ-24V30W□□A	PJ-24V50W□□A	PJ-24V100W□□A	PJ-24V150W□□A
Output Voltage	24V	24V	24V	24V
Output Voltage Range	21.6-26.4V	21.6-26.4V	21.6-26.4V	21.6-26.4V
Output Current	1.30A	2.10A	4.30A	6.30A
Output Power	31.2W	50.4W	103.2W	150W
Line Regulation	< 96mV			
Load Regulation	< 150mV			
PARD (20MHz)	< 150mVpp			
Hold-up Time	20ms typ. @ 100Vac			
INPUT				
Phase Input	Single Phase			
Input Voltage Range	85-264Vac			
Input Frequency	47-63Hz			
Input Current	0.65A typ. @ 100Vac, 0.35A typ. @ 200Vac	0.65A typ. @ 100Vac, 0.35A typ. @ 200Vac	1.30A typ. @ 100Vac, 0.65A typ. @ 200Vac	1.90A typ. @ 100Vac, 0.95A typ. @ 200Vac
Efficiency ¹⁾ at 100% Load	85.0% typ. @ 100Vac, 86.0% typ. @ 200Vac	84.5% typ. @ 100Vac, 87.0% typ. @ 200Vac	86.0% typ. @ 100Vac, 89.0% typ. @ 200Vac	88.0% typ. @ 100Vac, 91.0% typ. @ 200Vac
Max Inrush Current (Cold Start)	15A typ. @ 100Vac, 30A typ. @ 200Vac			
Power Factor	Conform to EN 61000-3-2	0.98 typ. @ 100Vac, 0.97 typ. @ 200Vac	0.99 typ. @ 100Vac, 0.98 typ. @ 200Vac	0.99 typ. @ 100Vac, 0.97 typ. @ 200Vac
Leakage Current	< 0.1mA @ 100Vac, < 0.2mA @ 240Vac		< 0.2mA @ 100Vac, < 0.4mA @ 240Vac	
MECHANICAL				
Case Cover / Chassis	SGCC			
Dimensions (L x W x D) ²⁾	105 x 50 x 25.6 mm (4.13" x 1.97" x 1.01")	132 x 50 x 26.6 mm (5.20" x 1.97" x 1.05")	155 x 62 x 33.5 mm (6.10" x 2.44" x 1.32")	160 x 75 x 37 mm (6.30" x 2.95" x 1.46")
Unit Weight ²⁾	0.11 kg (0.24 lb)	0.16 kg (0.35 lb)	0.26 kg (0.57 lb)	0.29 kg (0.64 lb)
Cooling System	Convection			
Input Terminal	(JST): B3P5-VH(LF)(SN)			
Output Terminal	(JST): B4P-VH(LF)(SN)		(JST): B8P-VH(LF)(SN)	V- (JST): B7P-VH(LF)(SN), V+ (JST): B6P-VH(LF)(SN)
Input / Output Wire	AWG 22-18	AWG 22-18	AWG 22-18	AWG 22-18
MTBF ³⁾	> 200,000 hrs	> 200,000 hrs	> 200,000 hrs	> 200,000 hrs
ENVIRONMENT				
Operating Temperature	-10°C to +70°C			
Storage Temperature	-25°C to +75°C			
Power De-rating ²⁾	> 50°C (2.5% / °C)			> 50°C (2% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)			

Notes


- 1) At 25°C ambient temperature.
- 2) Open Frame (without chassis and cover).
- 3) MTBF as per JEITA RCR-9102B.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

PJ-24V30W□NA

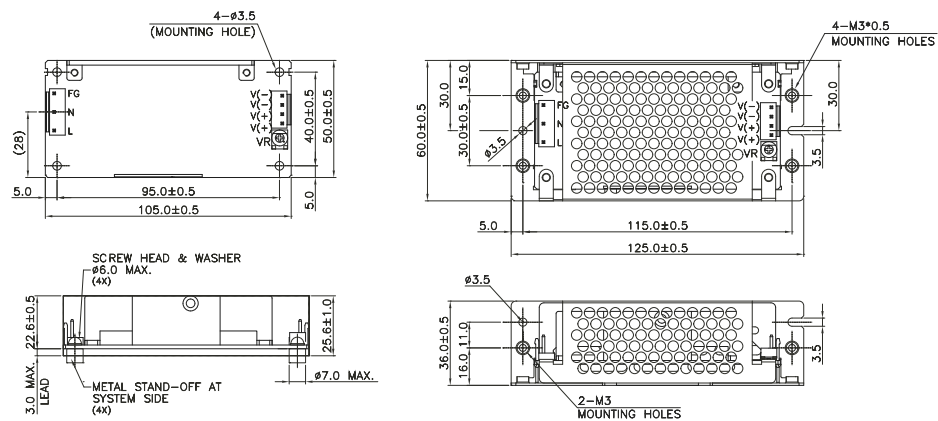


PJ-24V50W□NA

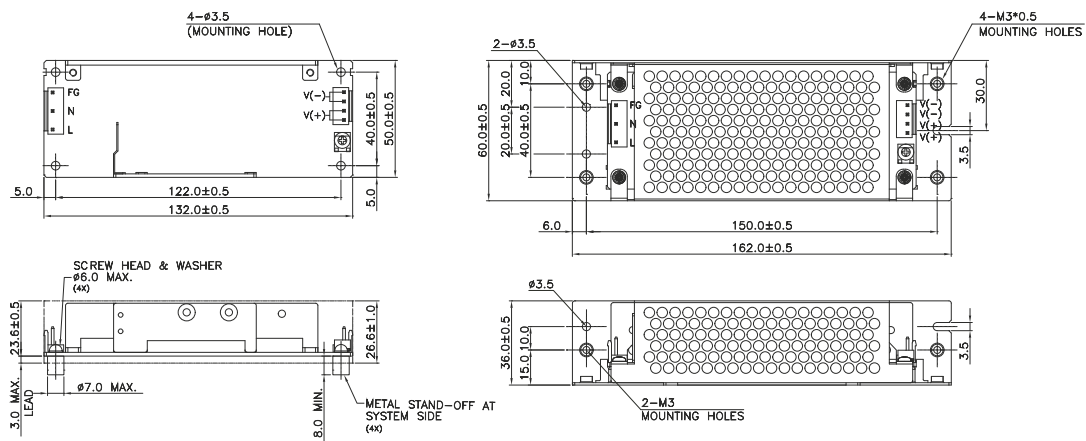


*Units in mm

PJ-24V100W□□A

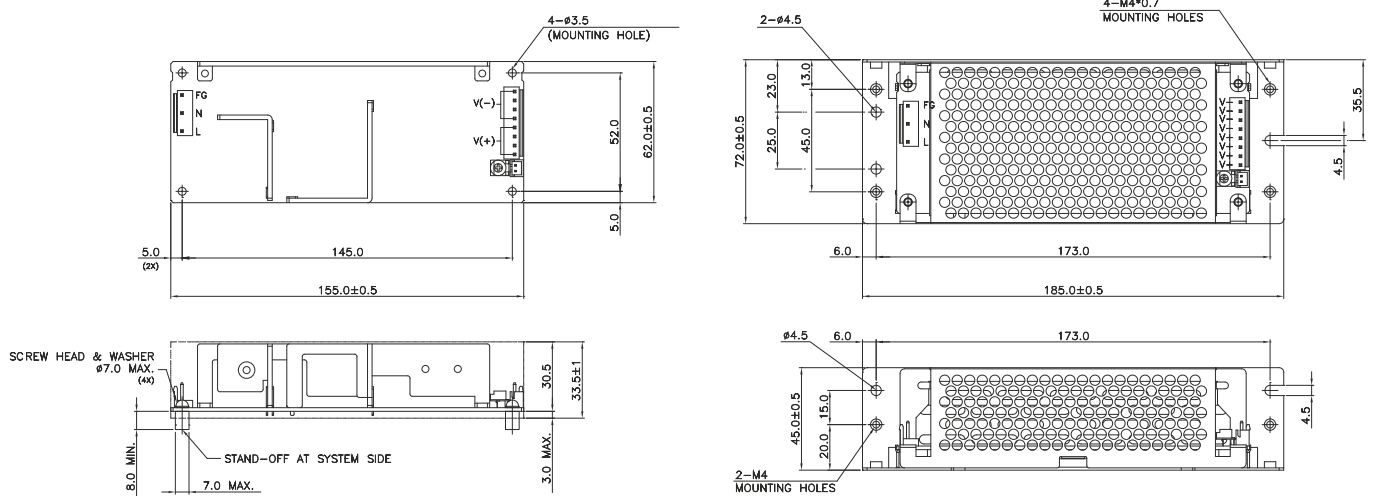


PJ-24V150W□□A

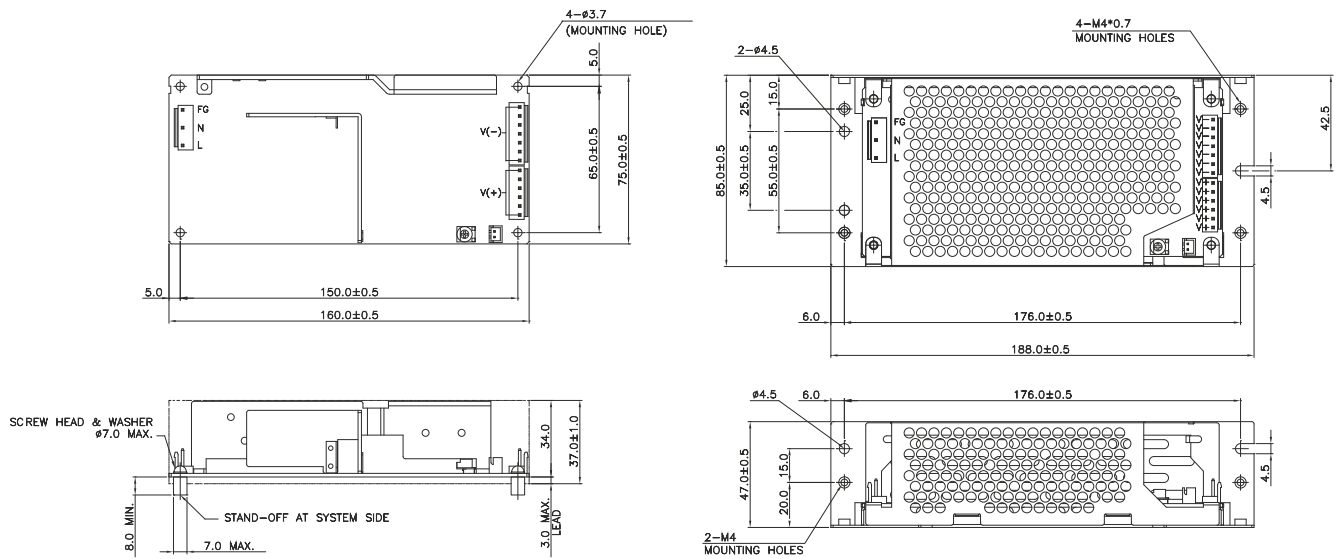

*Units in mm

PJ Open Frame Power Supply

5V, 48V Output

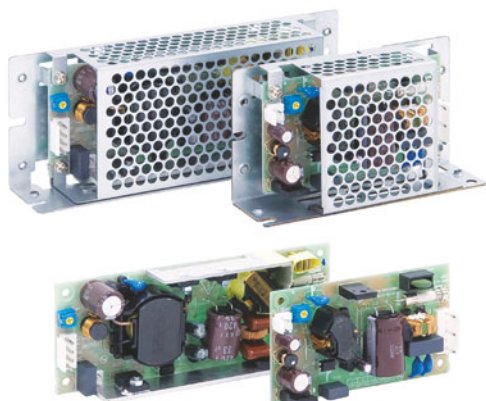

PJ

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- High PF > 0.97 (for 50W)
- Low Inrush Current / Low Leakage Current
- Conforms to harmonic current IEC/EN 61000-3-2, Class A; Class A and Class D for 50W
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Versatile configuration options: Open Frame, L Frame, Enclosed
- Long life capacitors

GENERAL SPECIFICATIONS


OUTPUT	PJ-5V15W□□A	PJ-48V50W□□A
Output Voltage	5V	48V
Output Voltage Range	4.50-5.50V	43.2-52.8V
Output Current	3.00A	1.10A
Output Power	15W	52.8W
Line Regulation	< 20mV	< 192mV
Load Regulation	< 40mV	< 240mV
PARD (20MHz)	< 120mVpp	< 250mVpp
Hold-up Time	20ms typ. @ 100Vac	
INPUT		
Phase Input	Single Phase	
Input Voltage Range	85-264Vac	
Input Frequency	47-63Hz	
Input Current	0.35A typ. @ 100Vac, 0.20A typ. @ 200Vac	0.65A typ. @ 100Vac, 0.35A typ. @ 200Vac
Efficiency ¹⁾ at 100% Load	78.0% typ. @ 100Vac, 79.5% typ. @ 200Vac	83.0% typ. @ 100Vac, 85.0% typ. @ 200Vac
Max Inrush Current (Cold Start)	15A typ. @ 100Vac, 30A typ. @ 200Vac	
Power Factor	Conform to EN 61000-3-2	0.98 typ. @ 100Vac, 0.97 typ. @ 200Vac
Leakage Current	< 0.1mA @ 100Vac, < 0.2mA @ 240Vac	
MECHANICAL		
Case Cover / Chassis	SGCC	
Dimensions (L x W x D) ²⁾	87.5 x 50 x 22 mm (3.44" x 1.97"x 0.87")	132 x 50 x 26.6 mm (5.20" x 1.97" x 1.05")
Unit Weight ²⁾	0.06 kg (0.13 lb)	0.16 kg (0.35 lb)
Cooling System	Convection	
Input Terminal	(JST): B3P5-VH(LF)(SN)	
Output Terminal	(JST): B2P-VH(LF)(SN)	(JST): B4P-VH(LF)(SN)
Input / Output Wire	AWG 22-18	AWG 22-18
MTBF ³⁾	> 200,000 hrs	> 200,000 hrs
ENVIRONMENT		
Operating Temperature	-10°C to +70°C	
Storage Temperature	-25°C to +75°C	
Power De-rating ²⁾	> 50°C (2.5% / °C)	
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	0 to 5,000 m (0 tp 16,400 ft)	

Notes


- 1) At 25°C ambient temperature.
- 2) Open Frame (without chassis and cover).
- 3) MTBF as per JEITA RCR-9102B.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS

PJ-5V15W□NA

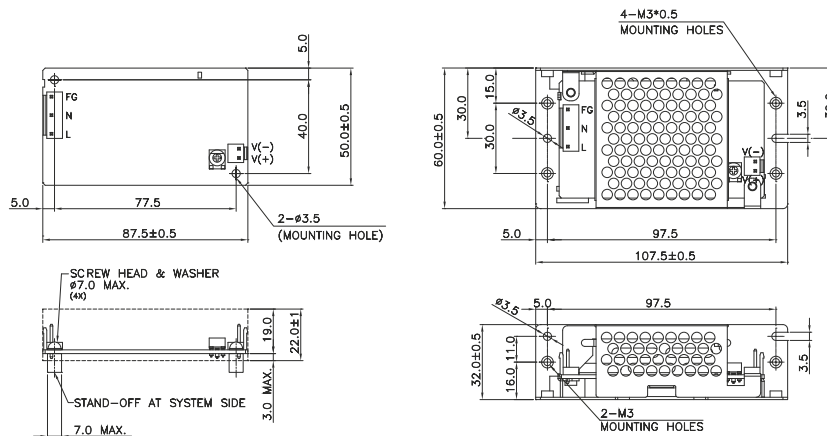


PJ-48V50W□NA

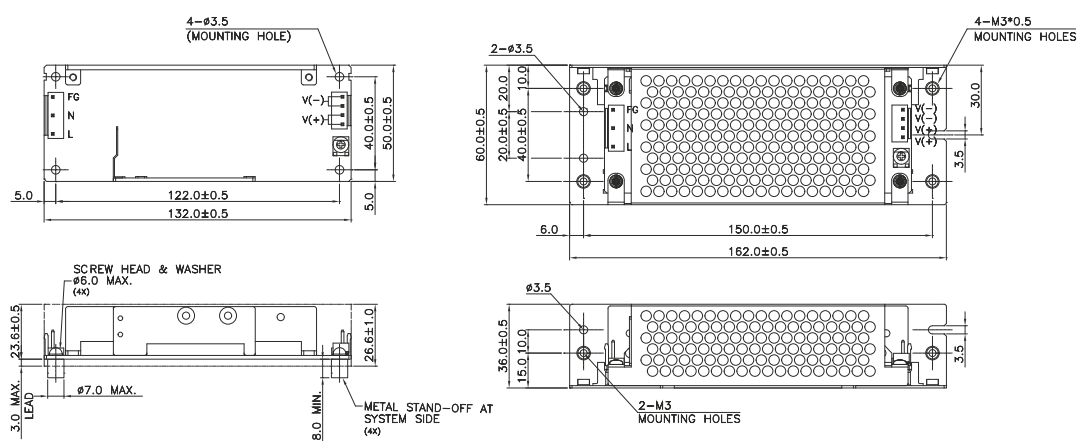

*Units in mm

PJB Open Frame Power Supply

24V Output

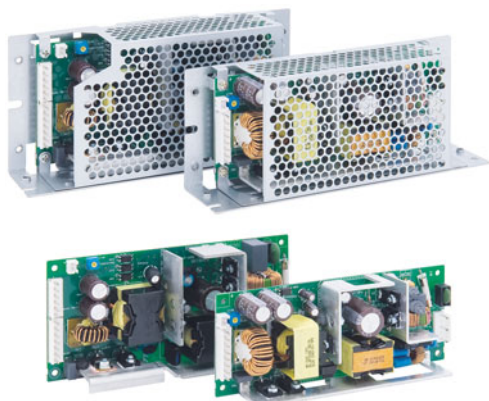

PJB

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Power Boost of 200% for 10 seconds
- High PF > 0.97
- Low Inrush Current / Low Leakage Current
- Conforms to harmonic current IEC/EN 61000-3-2, Class D
- Conformal coating on PCBAs to protect against common dust and chemical pollutants
- Versatile configuration options: Open Frame, L Frame, Enclosed
- Remote ON/OFF option for selected models

GENERAL SPECIFICATIONS

OUTPUT	PJB-24V100W□□A	PJB-24V150W□□A
Output Voltage	24V	24V
Output Voltage Range	21.6-26.4V	21.6-26.4V
Output Current	4.30A (8.60A for 10s)	6.30A (12.6A for 10s)
Output Power	103.2W (206.4W for 10s)	151.2W (302.4W for 10s)
Line Regulation	< 96mV	
Load Regulation	< 150mV	
PARD (20MHz)	< 150mVpp	
Hold-up Time	20ms typ. @ 100Vac	
INPUT		
Phase Input	Single Phase	
Input Voltage Range	85-264Vac	
Input Frequency	47-63Hz	
Input Current	1.30A typ. @ 100Vac, 0.65A typ. @ 200Vac	1.90A typ. @ 100Vac, 0.95A typ. @ 200Vac
Efficiency ¹⁾ at 100% Load	86.5% typ. @ 100Vac, 89.0% typ. @ 200Vac	88.0% typ. @ 100Vac, 90.5% typ. @ 200Vac
Max Inrush Current (Cold Start)	15A typ. @ 100Vac, 30A typ. @ 200Vac	
Power Factor	0.98 typ. @ 100Vac, 0.97 typ. @ 200Vac	0.98 typ. @ 100Vac, 0.95 typ. @ 200Vac
Leakage Current	< 0.2mA @ 100Vac, < 0.4mA @ 240Vac	
MECHANICAL		
Case Cover / Chassis	SGCC	
Dimensions (L x W x D) ²⁾	155 x 62 x 33.5 mm (6.10" x 2.44" x 1.32")	160 x 75 x 37 mm (6.30" x 2.95" x 1.46")
Unit Weight ²⁾	0.26 kg (0.57 lb)	0.31 kg (0.68 lb)
Cooling System	Convection	
Input Terminal	(JST): B3P5-VH(LF)(SN)	
Output Terminal	(JST): B8P-VH(LF)(SN)	V- (JST): B7P-VH(LF)(SN), V+ (JST): B6P-VH(LF)(SN)
Input / Output Wire	AWG 22-18	AWG 22-18
MTBF ³⁾	> 200,000 hrs	> 200,000 hrs
ENVIRONMENT		
Operating Temperature	-10°C to +70°C	
Storage Temperature	-25°C to +75°C	
Power De-rating ²⁾	> 50°C (2.5% / °C)	> 50°C (2% / °C)
Operating Humidity	5 to 95% RH (Non-Condensing)	
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)	

Notes

- 1) At 25°C ambient temperature.
- 2) Open Frame (without chassis and cover).
- 3) MTBF as per JEITA RCR-9102B.
- 4) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

PJB-24V100W□□A


PJT Open Frame Power Supply

12V Output

PJT

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Small standard footprint
- Low Leakage Current < 0.1mA
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs. as per Telcordia SR-332
- Short Circuit / Overvoltage / Overcurrent / Over Temperature Protections

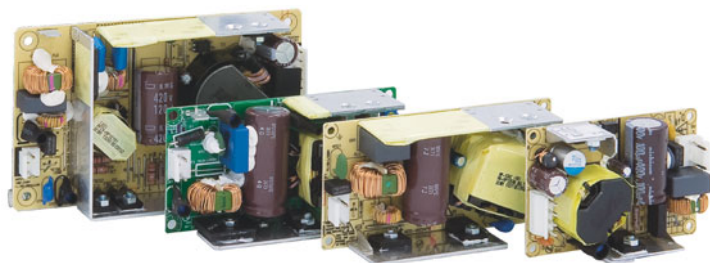

GENERAL SPECIFICATIONS


OUTPUT	PJT-12V40WBA□	PJT-12V65WBA□	PJT-12V100WBA□	PJT-12V100WBB□
Output Voltage	12V	12V	12V	12V
Output Current	3.33A	5.00A	8.33A	6.67A (Convection) 8.33A (Forced Cooling)
Output Power	40W	60W	100W	80W (Convection) 100W (Forced Cooling)
Line Regulation	< 0.5%			
Load Regulation	< 1%			
PARD (20MHz)	< 120mVpp			
Hold-up Time	18ms typ. @ 115Vac, 90ms typ. @ 230Vac	16ms typ. @ 115Vac, 80ms typ. @ 230Vac	20ms typ. @ 115Vac & 230Vac	10ms typ. @ 115Vac % 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	90-264Vac			
Input Frequency	47-63Hz			
Input Current	0.85A typ. @ 115Vac	1.50A typ. @ 115Vac		2.50A typ. @ 115Vac
Efficiency ¹⁾ at 100% Load	85.0% typ. @ 115Vac, 86.0% typ. @ 230Vac	86.0% typ. @ 115Vac, 86.5% typ. @ 230Vac	86.5% typ. @ 115Vac & 230Vac	86.0% typ. @ 115Vac, 88.0% typ. @ 230Vac
Max Inrush Current (Cold Start)	30A typ. @ 115Vac, 60A typ. @ 230Vac			
Power Factor	Conform to EN 61000-3-2			
Leakage Current	< 0.1mA @ 240Vac			
MECHANICAL				
Case Cover / Chassis	—			
Dimensions (L x W x D)	76.2 x 50.8 x 22.9 mm (3.00" x 2.00" x 0.90")	101.6 x 50.8 x 30 mm (4.00" x 2.00" x 1.18")	127 x 76.2 x 31 mm (5.00" x 3.00" x 1.22")	101.6 x 50.8 x 31.8 mm (4.00" x 2.00" x 1.25")
Unit Weight	0.08 kg (0.18 lb)	0.13 kg (0.29 lb)	0.21 kg (0.46 lb)	0.15 kg (0.33 lb)
Cooling System	Convection			Convection / Forced Cooling
Input Terminal	(JST): B2P3-VH(LF)(SN)			
Output Terminal	(JST): B4P-VH(LF)(SN)		(JST): B8P-VH(LF)(SN)	(JST): B4P-VH(LF)(SN)
Input / Output Wire	AWG 22-18	AWG 22-18	AWG 22-18	AWG 20-18
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT				
Operating Temperature	-10°C to +70°C			
Storage Temperature	-40°C to +85°C			
Power De-rating	> 50°C (2.5% / °C)			Convection: > 50°C (2% / °C) Forced Cooling: > 50°C (2.5% / °C)
Operating Humidity	10 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)			

Notes


- 1) At 25°C ambient temperature.
- 2) MTBF as per Telcordia SR-332 (I/P: 115Vac, O/P: 100% load).
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS


PJT-12V40WBA□

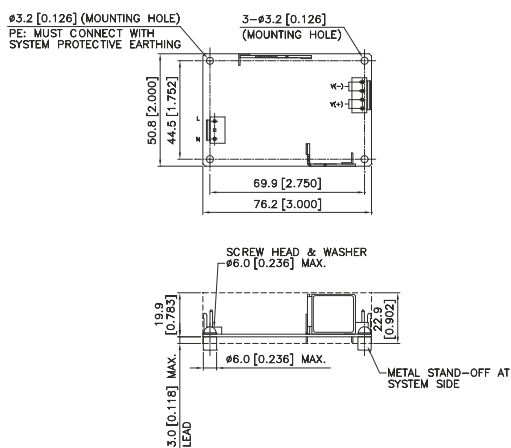


PJT-12V65WBA□

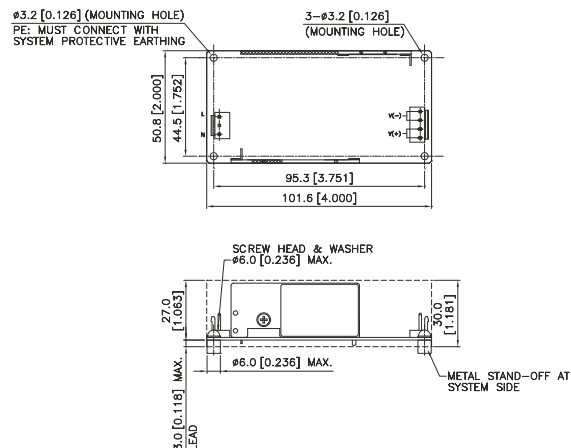

PJT-12V100WBA□

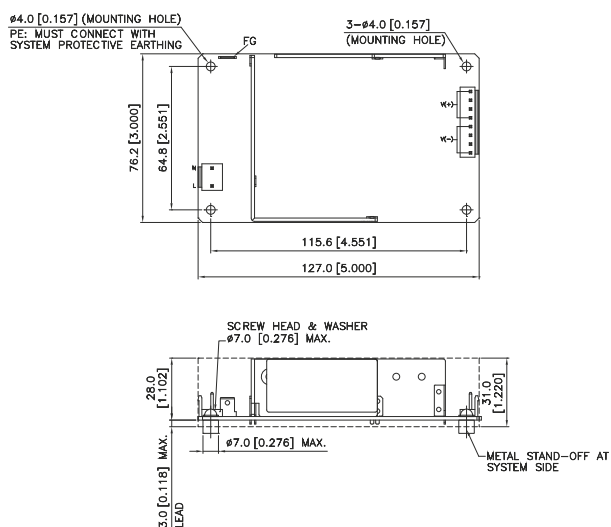

PJT-12V100WBB□

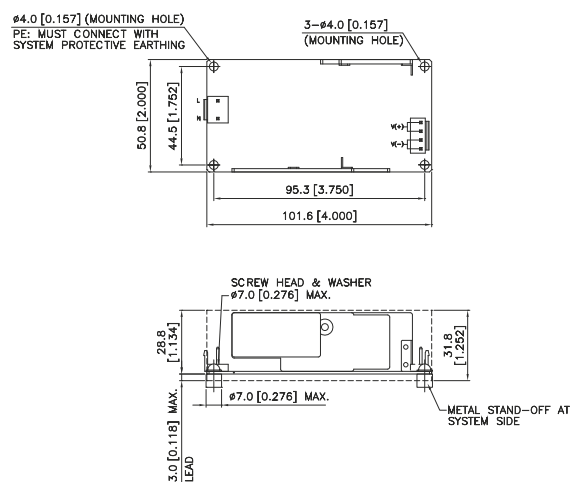

*Units in mm [inch]

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply


PJT Open Frame Power Supply

15V Output

PJT

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Small standard footprint
- Low Leakage Current < 0.1mA
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs. as per Telcordia SR-332
- Short Circuit / Overvoltage / Overcurrent / Over Temperature Protections

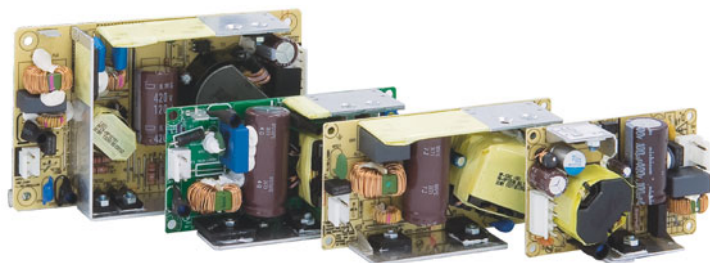

GENERAL SPECIFICATIONS


OUTPUT	PJT-15V40WBA□	PJT-15V65WBA□	PJT-15V100WBA□	PJT-15V100WBB□
Output Voltage	15V	15V	15V	15V
Output Current	2.67A	4.20A	6.67A	5.33A (Convection) 6.67A (Forced Cooling)
Output Power	40W	63W	100W	80W (Convection) 100W (Forced Cooling)
Line Regulation	< 0.5%			
Load Regulation	< 1%			
PARD (20MHz)	< 150mVpp			
Hold-up Time	18ms typ. @ 115Vac, 90ms typ. @ 230Vac	16ms typ. @ 115Vac, 80ms typ. @ 230Vac	20ms typ. @ 115Vac % 230Vac	10ms typ. @ 115Vac & 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	90-264Vac			
Input Frequency	47-63Hz			
Input Current	0.85A typ. @ 115Vac	1.50A typ. @ 115Vac		2.50A typ. @ 115Vac
Efficiency ¹⁾ at 100% Load	86.0% typ. @ 115Vac, 87.0% typ. @ 230Vac	87.0% typ. @ 115Vac, 88.5% typ. @ 230Vac	87.5% typ. @ 115Vac & 230Vac	87.0% typ. @ 115Vac, 89.0% typ. @ 230Vac
Max Inrush Current (Cold Start)	30A typ. @ 115Vac, 60A typ. @ 230Vac			
Power Factor	Conform to EN 61000-3-2			
Leakage Current	< 0.1mA @ 240Vac			
MECHANICAL				
Case Cover / Chassis	-			
Dimensions (L x W x D)	76.2 x 50.8 x 22.9 mm (3.00" x 2.00" x 0.90")	101.6 x 50.8 x 30 mm (4.00" x 2.00" x 1.18")	127 x 76.2 x 31 mm (5.00" x 3.00" x 1.22")	101.6 x 50.8 x 31.8 mm (4.00" x 2.00" x 1.25")
Unit Weight	0.08 kg (0.18 lb)	0.13 kg (0.29 lb)	0.21 kg (0.46 lb)	0.15 kg (0.33 lb)
Cooling System	Convection			Convection / Forced Cooling
Input Terminal	(JST): B2P3-VH(LF)(SN)			
Output Terminal	(JST): B4P-VH(LF)(SN)		(JST): B8P-VH(LF)(SN)	(JST): B4P-VH(LF)(SN)
Input / Output Wire	AWG 22-18	AWG 22-18	AWG 22-18	AWG 20-18
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT				
Operating Temperature	-10°C to +70°C			
Storage Temperature	-40°C to +85°C			
Power De-rating	> 50°C (2.5% / °C)			Convection: > 50°C (2% / °C) Forced Cooling: > 50°C (2.5% / °C)
Operating Humidity	10 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)			

Notes


- 1) At 25°C ambient temperature.
- 2) MTBF as per Telcordia SR-332 (I/P: 115Vac, O/P: 100% load).
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS


PJT-15V40WBA□

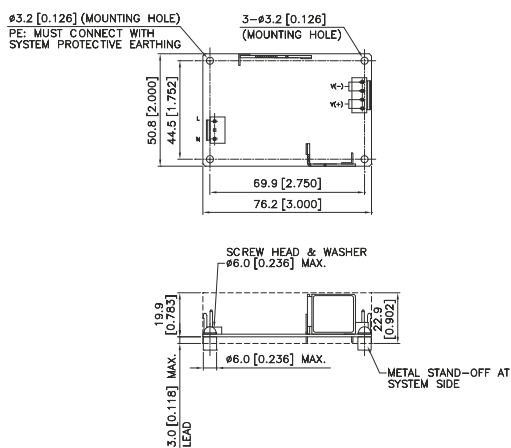


PJT-15V65WBA□

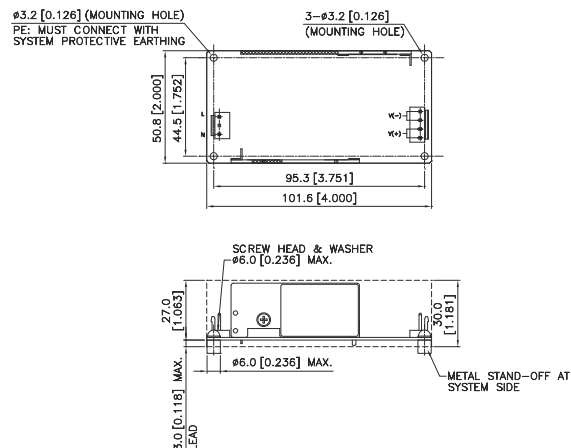

PJT-15V100WBA□

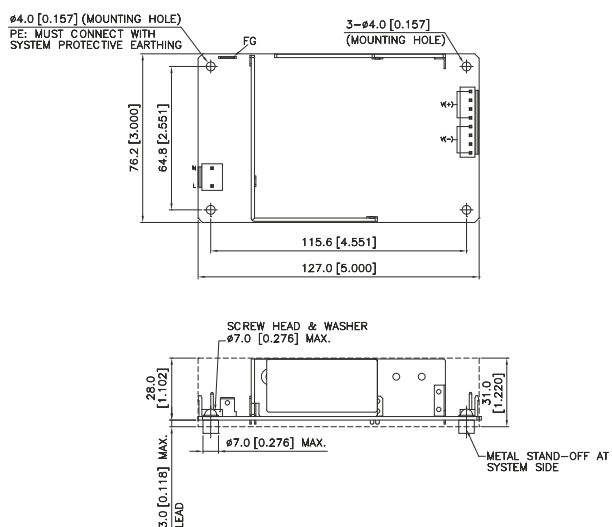

PJT-15V100WBB□

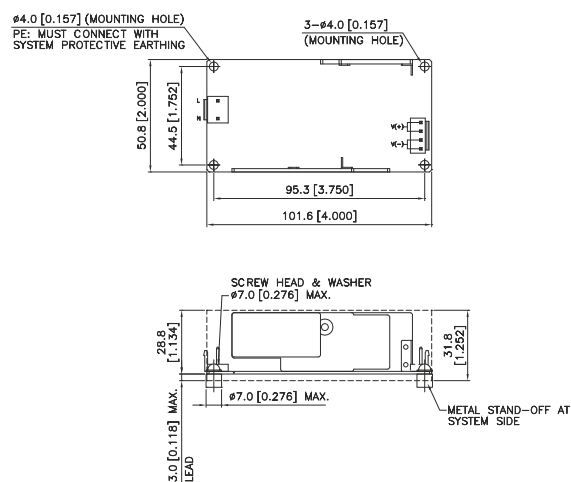

*Units in mm [inch]

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply


PJT Open Frame Power Supply

18V Output

PJT

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Small standard footprint
- Low Leakage Current < 0.1mA
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs. as per Telcordia SR-332
- Short Circuit / Overvoltage / Overcurrent / Over Temperature Protections

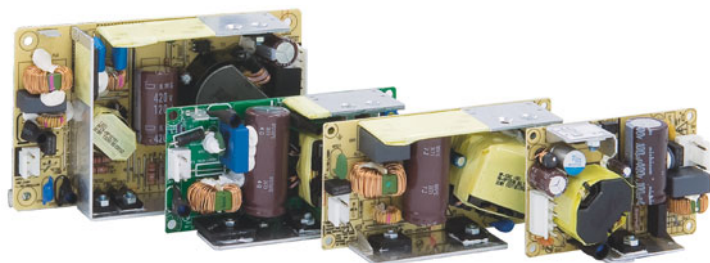

GENERAL SPECIFICATIONS


OUTPUT	PJT-18V40WBA□	PJT-18V65WBA□	PJT-18V100WBA□	PJT-18V100WBB□
Output Voltage	18V	18V	18V	18V
Output Current	2.22A	3.61A	5.55A	4.44A (Convection) 5.55A (Forced Cooling)
Output Power	40W	65W	100W	80W (Convection) 100W (Forced Cooling)
Line Regulation	< 0.5%			
Load Regulation	< 1%			
PARD (20MHz)	< 180mVpp			
Hold-up Time	18ms typ. @ 115Vac, 90ms typ. @ 230Vac	16ms typ. @ 115Vac, 80ms typ. @ 230Vac	20ms typ. @ 115Vac & 230Vac	10ms typ. @ 115Vac & 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	90-264Vac			
Input Frequency	47-63Hz			
Input Current	0.85A typ. @ 115Vac	1.50A typ. @ 115Vac		2.50A typ. @ 115Vac
Efficiency ¹⁾ at 100% Load	86.0% typ. @ 115Vac & 230Vac	87.0% typ. @ 115Vac, 88.0% typ. @ 230Vac	87.5% typ. @ 115Vac & 230Vac	87.0% typ. @ 115Vac, 89.0% typ. @ 230Vac
Max Inrush Current (Cold Start)	30A typ. @ 115Vac, 60A typ. @ 230Vac			
Power Factor	Conform to EN 61000-3-2			
Leakage Current	< 0.1mA @ 240Vac			
MECHANICAL				
Case Cover / Chassis	—			
Dimensions (L x W x D)	76.2 x 50.8 x 22.9 mm (3.00" x 2.00" x 0.90")	101.6 x 50.8 x 30 mm (4.00" x 2.00" x 1.18")	127 x 76.2 x 31 mm (5.00" x 3.00" x 1.22")	101.6 x 50.8 x 31.8 mm (4.00" x 2.00" x 1.25")
Unit Weight	0.08 kg (0.18 lb)	0.13 kg (0.29 lb)	0.21 kg (0.46 lb)	0.15 kg (0.33 lb)
Cooling System	Convection			Convection / Forced Cooling
Input Terminal	(JST): B2P3-VH(LF)(SN)			
Output Terminal	(JST): B4P-VH(LF)(SN)		(JST): B8P-VH(LF)(SN)	(JST): B4P-VH(LF)(SN)
Input / Output Wire	AWG 22-18	AWG 22-18	AWG 22-18	AWG 20-18
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT				
Operating Temperature	-10°C to +70°C			
Storage Temperature	-40°C to +85°C			
Power De-rating	> 50°C (2.5% / °C)			Convection: > 50°C (2% / °C) Forced Cooling: > 50°C (2.5% / °C)
Operating Humidity	10 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)			

Notes


- 1) At 25°C ambient temperature.
- 2) MTBF as per Telcordia SR-332 (I/P: 115Vac, O/P: 100% load).
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS


PJT-18V40WBA□

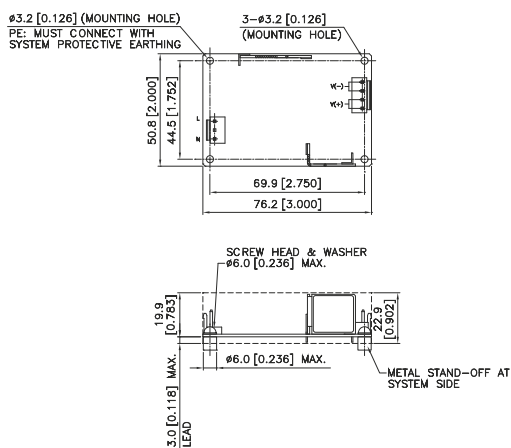


PJT-18V65WBA□

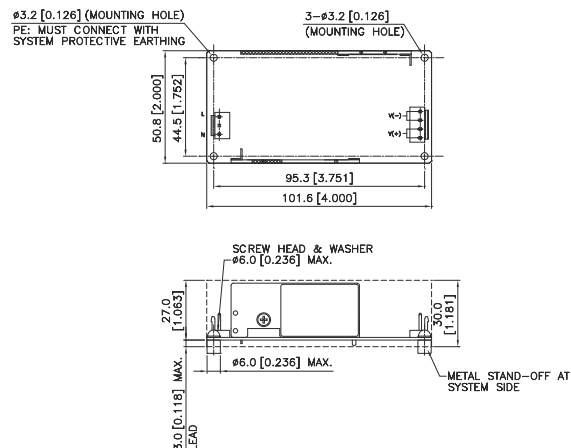

PJT-18V100WBA□

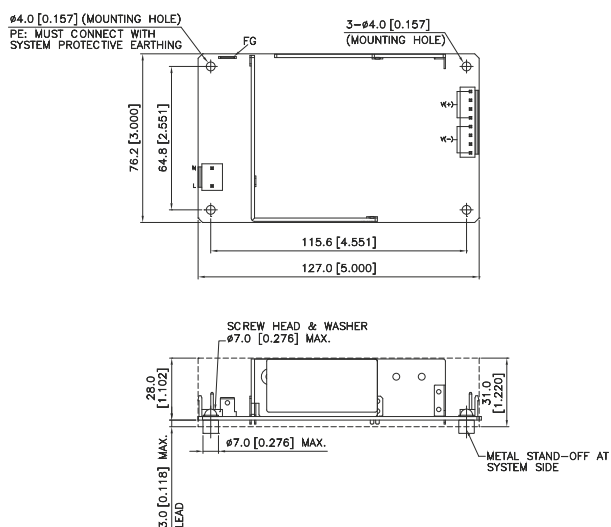

PJT-18V100WBB□

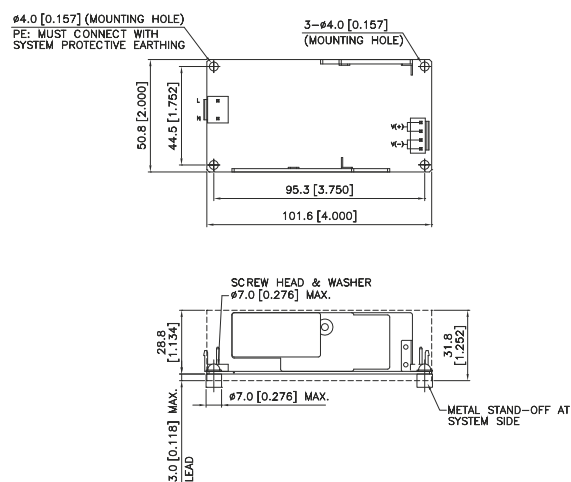

*Units in mm [inch]

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply

Open Frame Power Supply


PJT Open Frame Power Supply

24V Output

PJT

HIGHLIGHTS & FEATURES

- Universal AC input voltage range
- Small standard footprint
- Low Leakage Current < 0.1mA
- Conforms to harmonic current IEC/EN 61000-3-2, Class A
- High MTBF > 700,000 hrs. as per Telcordia SR-332
- Short Circuit / Overvoltage / Overcurrent / Over Temperature Protections

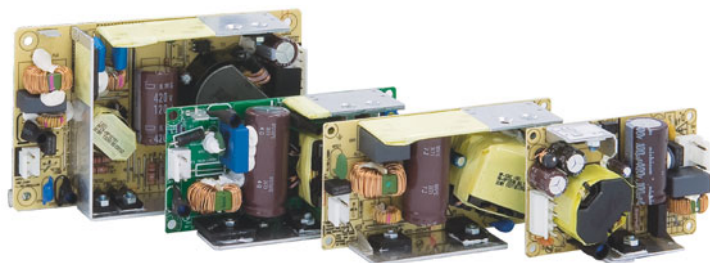

GENERAL SPECIFICATIONS


OUTPUT	PJT-24V40WBA□	PJT-24V65WBA□	PJT-24V100WBA□	PJT-24V100WBB□
Output Voltage	24V	24V	24V	24V
Output Current	1.66A	2.71A	4.17A	3.33A (Convection) 4.17A (Forced Cooling)
Output Power	40W	65W	100W	80W (Convection) 100W (Forced Cooling)
Line Regulation	< 0.5%			
Load Regulation	< 1%			
PARD (20MHz)	< 240mVpp			
Hold-up Time	18ms typ. @ 115Vac, 90ms typ. @ 230Vac	16ms typ. @ 115Vac, 80ms typ. @ 230Vac	20ms typ. @ 115Vac & 230Vac	10ms typ. @ 115Vac & 230Vac
INPUT				
Phase Input	Single Phase			
Input Voltage Range	90-264Vac			
Input Frequency	47-63Hz			
Input Current	0.85A typ. @ 115Vac	1.50A typ. @ 115Vac		2.50A typ. @ 115Vac
Efficiency ¹⁾ at 100% Load	86.0% typ. @ 115Vac, 87.0% typ. @ 230Vac	87.0% typ. @ 115Vac & 230Vac	88.0% typ. @ 115Vac & 230Vac	88.0% typ. @ 115Vac, 89.0% typ. @ 230Vac
Max Inrush Current (Cold Start)	30A typ. @ 115Vac, 60A typ. @ 230Vac			
Power Factor	Conform to EN 61000-3-2			
Leakage Current	< 0.1mA @ 240Vac			
MECHANICAL				
Case Cover / Chassis	-			
Dimensions (L x W x D)	76.2 x 50.8 x 22.9 mm (3.00" x 2.00" x 0.90")	101.6 x 50.8 x 30 mm (4.00" x 2.00" x 1.18")	127 x 76.2 x 31 mm (5.00" x 3.00" x 1.22")	101.6 x 50.8 x 31.8 mm (4.00" x 2.00" x 1.25")
Unit Weight	0.08 kg (0.18 lb)	0.13 kg (0.29 lb)	0.21 kg (0.46 lb)	0.15 kg (0.33 lb)
Cooling System	Convection			Convection / Forced Cooling
Input Terminal	(JST): B2P3-VH(LF)(SN)			
Output Terminal	(JST): B4P-VH(LF)(SN)		(JST): B8P-VH(LF)(SN)	(JST): B4P-VH(LF)(SN)
Input / Output Wire	AWG 22-18	AWG 22-18	AWG 22-18	AWG 20-18
MTBF ²⁾	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs	> 700,000 hrs
ENVIRONMENT				
Operating Temperature	-10°C to +70°C			
Storage Temperature	-40°C to +85°C			
Power De-rating	> 50°C (2.5% / °C)			Convection: > 50°C (2% / °C) Forced Cooling: > 50°C (2.5% / °C)
Operating Humidity	10 to 95% RH (Non-Condensing)			
Operating Altitude	0 to 5,000 m (0 to 16,400 ft)			

Notes


- 1) At 25°C ambient temperature.
- 2) MTBF as per Telcordia SR-332 (I/P: 115Vac, O/P: 100% load).
- 3) All parameters are specified at 25°C ambient temperature unless otherwise indicated.

MECHANICAL DRAWINGS


PJT-24V40WBA□

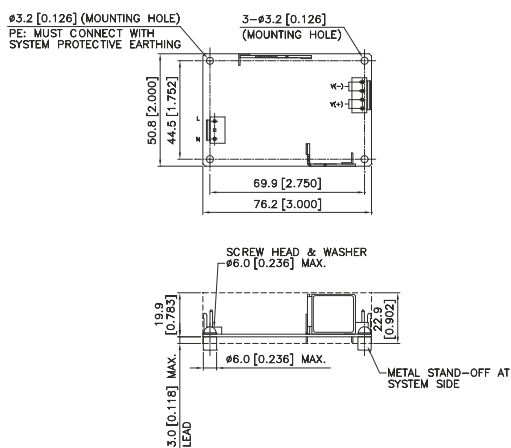


PJT-24V65WBA□

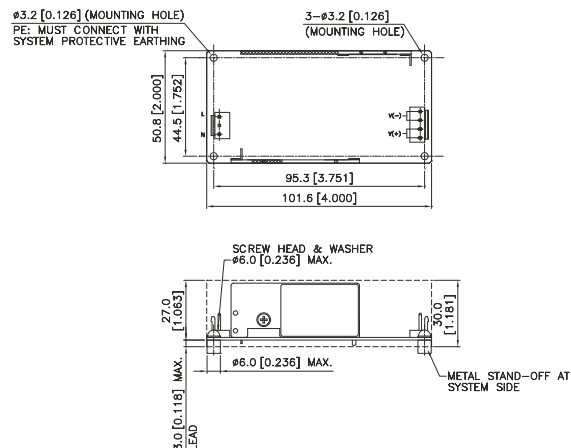

PJT-24V100WBA□

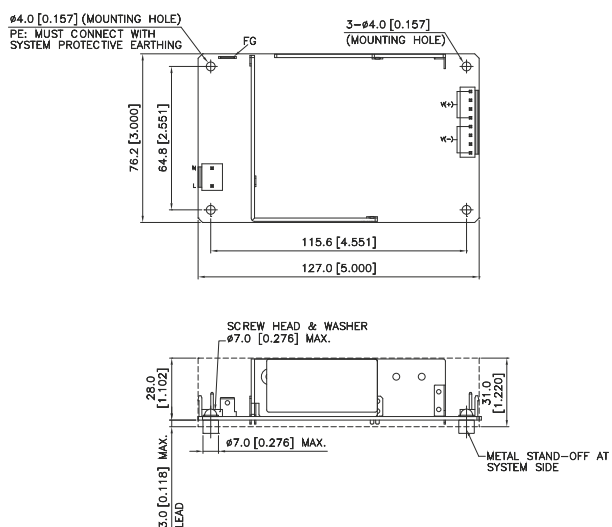

PJT-24V100WBB□

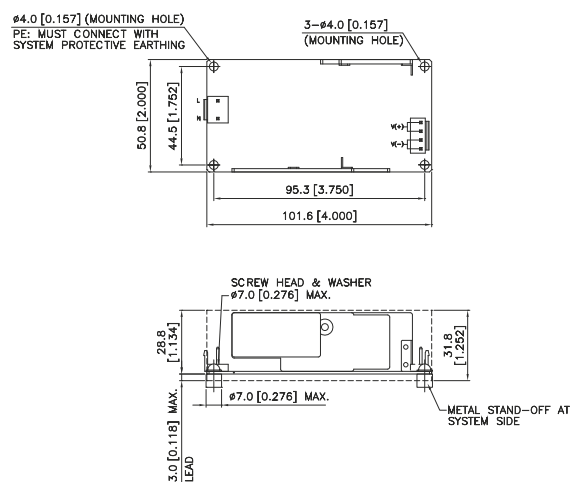

*Units in mm [inch]

DIN Rail Power Supply

DIN Rail Modules

Panel Mount Power Supply


Open Frame Power Supply

Accessories


L-01, L-02, L-03A, P-03

DIN Rail Accessories


■ L-01

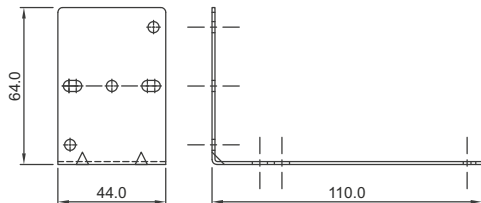


■ P-03




■ L-02

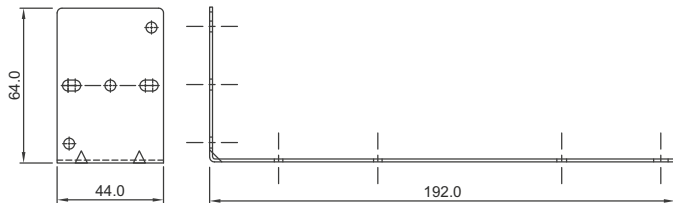

■ L-03A



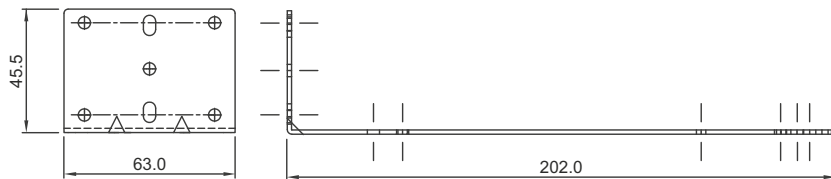


Accessories Assembly

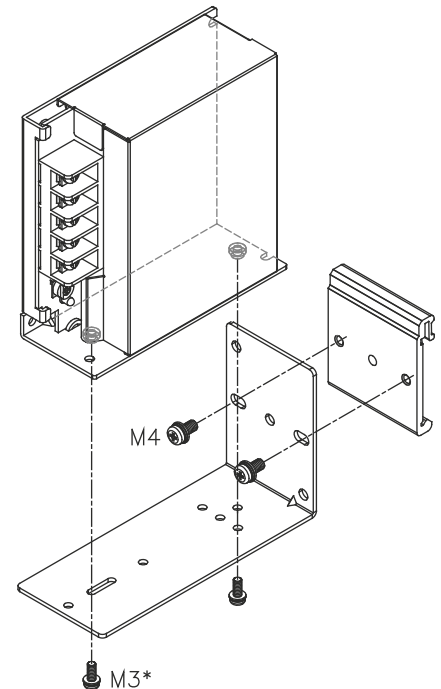

*Except PMC-24V300W1BA. Please use M4 screws only.


Model Information

Item	Model Number	Compatible Models
	L-01	PMC-05V015W1AA, PMC-05V035W1AA, PMC-05V050W1AA PMC-12V035W1AA, PMC-12V050W1AA, PMC-12V060W1NA PMC-24V035W1A□, PMC-24V050W1A□, PMC-24V075W1A□ PMH-24V50WCA□ PMT-5V35W1A□, PML-5V35W1A□, PMT-5V50W1A□, PML-5V50W1A□ PMT-15V50W1A□, PML-15V50W1A□ PMT-12V35W1A□, PML-12V35W1A□, PMT-12V50W1A□, PML-12V50W1A□ PMT-24V35W1A□, PML-24V35W1A□, PMT-24V50W1A□, PML-24V50W1A□
	L-02	PMC-12V100W1AA, PMC-12V150W1B□ PMC-24V100W1A□, PMC-24V150W1A□, PMC-24V150W1B□, PMC-24V150W2AA, PMC-DSPV100W1A PMC-48V150W1B□ PMH-24V100WCA□, PMH-24V150WCB□ PMT-12V100W1A□, PML-12V100W1A□, PMT-12V150W1A□, PML-12V150W1A□ PMT-24V100W1A□, PML-24V100W1A□, PMT-24V150W1A□, PML-24V150W1A□ PMT-48V150W1A□, PML-48V150W1A□ PMT-D1V100W1A□, PML-D1V100W1A□, PMT-D2V100W1A□, PML-D2V100W1A□
	L-03A	PMC-24V300W1BA PMF-24V200WC□□, PMF-24V240WC□□
	P-03	All models *P-03 must be used with L-01, L-02 or L-03A


LM-01

Panel Mount Accessories

■ LM-01



Accessories Assembly

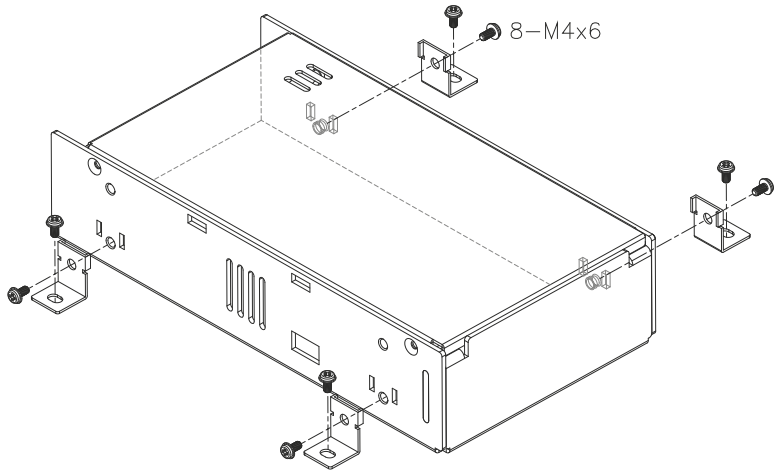

Model Information

Item	Model Number	Compatible Models
	LM-01	PMT-4V350W1A□ PMT-5V350W1A□ PMT-24V200W1A□, PML-24V200W1A□, PMT-24V350W1A□ PMT-36V350W1A□ PMT-48V350W1A□ PMF-4V320WC□□ PMF-5V320WC□□ PMF-24V200WC□□, PMF-24V240WC□□, PMF-24V320WC□□ PMR-4V320WC□A, PMR-4V320WD□A PMR-5V320WC□A, PMR-5V320WD□A

Standards & Approvals

Delta Standard Power Supplies

	CE	CB Scheme to IEC 60950-1	SIQ or TUV or NEMKO to EN 60950-1	UL 60950-1	UL 508	UL 1310	NEC Class 2	CSA C22.2 No. 107.1-01	CSA C22.2 No. 60950-1	ATEX EN 60079-15	CSA C22.2 No. 213 and ANSI/ISA-12.12.09	EAC (Eurasian Customs Union)	CCC (China)	RoHS Directive 2011/65/EU	SEMI F47	EN 61204-3	EN 61000-3-2 (PFC)	EN 61000-3-3 (Flicker)	EN 61000-6-1 (Immunity)	EN 61000-6-2 (Immunity)	EN 55024 (Immunity)	EN 55011 Class B (Emissions)	EN 55022 Class B (Emissions)	
DIN Rail Power Supply																								
DRP012V015W1AY	●	●	●	●	●			●		●	●	●		●			●	●	●	●	●	●	●	
DRP012V015W1AZ	●	●	●	●	●			●		●	●	●		●			●	●	●	●	●	●	●	
DRP012V030W1AY	●	●	●	●	●			●		●	●	●		●			●	●	●	●	●	●	●	
DRP012V030W1AZ	●	●	●	●	●			●		●	●	●		●			●	●	●	●	●	●	●	
DRP012V060W1AA	●	●	●	●	●			●		●	●	●		●			●	●	●	●	●	●	●	
DRP012V100W1AA	●	●	●	●	●			●		●	●	●		●			●	●	●	●	●	●	●	
DRP-24V48W1AZ	●	●	●	●	●			●		●	●	●		●			●	●	●	●	●	●	●	
DRP024V060W1AZ	●	●	●	●	●			●	●		●	●		●			●	●	●	●		●	●	
DRP024V060W1AA	●	●	●	●	●			●	●	●	●	●		●	●		●	●	●	●		●	●	
DRP024V120W1AA	●	●	●	●	●			●	●	●	●	●		●	●		●	●	●	●		●	●	
DRP024V240W1AA	●	●	●	●	●			●	●	●	●	●		●	●		●	●	●	●		●	●	
DRP024V480W1AA	●	●	●	●	●			●	●	●	●	●		●	●		●	●	●	●		●	●	
DRP024V060W1BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V060W1BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V120W1BA	●	●	●	●	●			●		●	●	●	●	●			●	●	●	●		●	●	
DRP024V120W1BN	●	●	●	●	●			●		●	●	●	●	●			●	●	●	●		●	●	
DRP024V240W1BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V240W1BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V480W1BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V480W1BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V060W1NY	●	●	●	●	●	●	●	●		●	●			●		●	●	●	●	●		●	●	
DRP024V060W1NZ	●	●	●	●	●	●	●	●		●	●	●		●		●	●	●	●	●		●	●	
DRP-24V100W1NN	●	●	●	●	●	●	●	●				●		●		●	●	●	●	●		●	●	
DRP-24V120W2BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP-24V240W2BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V060W3BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V060W3BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V120W3BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V120W3BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V240W3BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V240W3BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V480W3BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V480W3BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP024V960W3BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP048V060W1BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP048V060W1BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP048V120W1BA	●	●	●	●	●			●		●	●	●	●	●		●	●	●	●	●		●	●	
DRP048V120W1BN	●	●	●	●	●			●		●	●	●	●	●		●	●	●	●	●		●	●	
DRP048V240W1BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP048V240W1BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP048V480W1BA	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DRP048V480W1BN	●	●	●	●	●			●		●	●	●		●		●	●	●	●	●		●	●	
DIN Rail Modules																								
DRR-20A	●	●	●	●	●					●	●	●		●					●	●	●		●	
DRR-20N	●	●	●	●	●					●	●	●		●					●	●	●		●	
DRR-40A	●	●	●	●	●					●	●	●		●					●	●	●		●	
DRR-40N	●	●	●	●	●							●		●					●	●	●		●	
DRU-24V40ABN	●	●	●	●	●			●			●	●		●		●				●	●		●	
DRB-24V020ABA	●	●	●	●	●			●		●	●	●		●			●		●	●		●	●	
DRB-24V020ABN	●	●	●	●	●			●			●	●		●		●	●	●		●	●		●	
DRB-24V040ABN	●	●	●	●	●			●			●	●		●		●	●	●		●	●		●	

	CE	CB Scheme to IEC 60950-1	CB Scheme to IEC 61558-1, IEC 61558-2-16, IEC 61010-1	SIQ or TUV or NEMKO to EN 60950-1	SIQ to EN 61558-1, EN 61558-2-16, EN 61010-1	UL 60950-1	UL 508	NEC Class 2	CSA C22.2 No. 107.1-01	EAC (Eurasian Customs Union)	CCC (China)	DNV GL (Maritime)	ABS	RoHS Directive 2011/65/EU	SEMI F47	EN 61204-3	EN 61000-3-2 (PFC)	EN 61000-3-3 (Flicker)	EN 61000-6-1 (Immunity)	EN 61000-6-2 (Immunity)	EN 55024 (Immunity)	EN 55011 Class B (Emissions)	EN 55022 Class A (Emissions)	EN 55022 Class B (Emissions)	EN 61000-6-3 (Emissions)	EN 61000-6-4 (Emissions)	
DIN Rail Power Supply																											
DRM-24V80W1PN	○	○	○	○	○	○	○		○			○	○	○	○	○	○	○		○	○	○		○	○	○	
DRM-24V120W1PN	●	●	●	●	●	●	●		●			●	●	●	●	●	●	●		●	●	●		●	●	●	
DRM-24V240W1PN	○	○	○	○	○	○	○		○			○	○	○	○	○	○	○		○	○	○		○	○	○	
DRL-24V120W1A□	○	○		○		○	○				○			○			○	○		○	○			○		○	
DRL-48V120W1A□	○	○		○		○	○				○			○			○	○		○	○			○		○	
DRC-5V10W1A□	●	●		●		●	●	●						●			●	●			●			●			
DRC-12V10W1AZ	●	●		●		●	●	●		●				●			●	●			●			●			
DRC-12V10W1AG	●	●		●		●	●	●						●			●	●			●			●			
DRC-12V30W1AZ	●	●		●		●	●	●		●				●			●	●			●			●			
DRC-12V30W1AG	●	●		●		●	●	●						●			●	●			●			●			
DRC-12V60W1AZ	●	●		●		●	●	●		●				●			●	●			●		●				
DRC-12V60W1AG	●	●		●		●	●	●						●			●	●			●		●				
DRC-24V10W1AZ	●	●		●		●	●	●		●				●			●	●			●			●			
DRC-24V10W1AG	●	●		●		●	●	●						●			●	●			●			●			
DRC-24V30W1AZ	●	●		●		●	●	●		●				●			●	●			●			●			
DRC-24V30W1AG	●	●		●		●	●	●						●			●	●			●			●			
DRC-24V60W1AZ	●	●		●		●	●	●		●				●			●	●			●		●				
DRC-24V60W1AG	●	●		●		●	●	●						●			●	●			●		●				
DRC-24V100W1AZ	●	●		●		●	●	●		●				●			●	●			●			●			
DRC-24V100W1AG	●	●		●		●	●	●						●			●	●			●			●			
DRS-5V15W1NZ	○	○		○		○	○	○		●	●			○		○	○	○	○	○	○	○		○	○	○	○
DRS-24V30W1AZ	●	●		●		●	●	●		●	●			●			●	●			●			●			
DRS-24V30W1NZ	○	○		○		○	○	○						○		○	○	○	○	○	○	○		○	○	○	○
Panel Mount Power Supply																											
PMC-05V015W1AA	●	●		●		●				●	●			●			●	●			●			●			
PMC-05V035W1AA	●	●		●		●				●	●			●			●	●			●			●			
PMC-05V035W1AJ	●	●		●		●					●			●			●	●			●			●			
PMC-05V050W1AA	●	●		●		●				●	●			●			●	●			●			●			
PMC-12V035W1AA	●	●		●		●				●	●			●			●	●			●			●			
PMC-12V035W1AJ	●	●		●		●					●			●			●	●			●			●			
PMC-12V050W1AA	●	●		●		●				●	●			●			●	●			●			●			
PMC-12V050W1AJ	●	●		●		●					●			●			●	●			●			●			
PMC-12V060W1NA	●	●		●		●		●						●			●	●			●			●			
PMC-12V100W1AA	●	●		●		●				●	●			●			●	●			●			●			
PMC-12V150W1AA	●	●		●		●				●	●			●			●	●			●			●			
PMC-12V150W1AJ	●	●		●		●					●			●			●	●			●			●			
PMC-12V150W1AL	●	●		●		●					●			●			●	●			●			●			
PMC-24V035W1A□	●	●		●		●				●	●			●			●	●			●			●			
PMC-24V050W1A□	●	●		●		●				●	●			●			●	●			●			●			
PMC-24V075W1A□	●	●		●		●				●	●			●			●	●			●			●			
PMC-24V100W1A□	●	●		●		●				●	●			●			●	●			●			●			
PMC-24V150W1A□	●	●		●		●				●	●			●			●	●			●			●			
PMC-24V150W2AA	●	●		●		●				●	●			●			●	●			●			●			

Standards & Approvals

Delta Standard Power Supplies

	CE	CB Scheme to IEC 60950-1	CB Scheme to IEC 60335-1, IEC 61558-1, IEC 61558-2-16	SIQ or TUV or NEMKO to EN 60950-1	SIQ to EN 60335-1, EN 61558-1, EN 61558-2-16	UL 60950-1	EAC (Eurasian Customs Union)	CCC (China)	RoHS Directive 2011/65/EU	EN 61000-3-2 (PFC)	EN 61000-3-3 (Flicker)	EN 61000-6-1 (Immunity)	EN 61000-6-2 (Immunity)	EN 55014-2 (Immunity)	EN 55024 (Immunity)	EN 55011 Class B (Emissions)	EN 55022 Class A (Emissions)	EN 55022 Class B (Emissions)	EN 55014-1 (Emissions)	EN 61000-6-3 (Emissions)
Panel Mount Power Supply																				
PMC-24V150W1BA	●	●		●		●	●	●	●	●	●				●			●		
PMC-24V150W1BJ	●	●		●		●	●	●	●	●	●				●			●		
PMC-24V150W1BL	●	●		●		●	●	●	●	●	●				●			●		
PMC-24V300W1BA	●	●		●		●	●	●	●	●	●				●			●		
PMC-24V600W1BA	●	●		●		●	●	●	●	●	●		●		●	●		●		
PMC-DSPV100W1A	●	●		●		●	●	●	●	●	●		●		●			●		
PMC-48V150W1BA	●	●		●		●	●	●	●	●	●				●			●		
PMC-48V150W1BJ	●	●		●		●		●	●	●	●				●			●		
PMC-48V150W1BL	●	●		●		●		●	●	●	●				●			●		
PMF-4V320WC□□	●	●		●		●		●	●	●	●				●			●		
PMF-5V320WC□□	●	●		●		●		●	●	●	●				●			●		
PMF-24V200WCA□	●	●		●		●		●	●	●	●				●			●		
PMF-24V200WCGCB	●	●		●		●	●	●	●	●	●				●			●		
PMF-24V200WCGR	●	●		●		●		●	●	●	●				●			●		
PMF-24V240WCA□	●	●		●		●		●	●	●	●				●			●		
PMF-24V240WCGCB	●	●		●		●	●	●	●	●	●				●			●		
PMF-24V240WCGR	●	●		●		●		●	●	●	●				●			●		
PMF-24V320WCA□	●	●		●		●		●	●	●	●				●			●		
PMF-24V320WCGCB	●	●		●		●	●	●	●	●	●				●			●		
PMF-24V320WCGR	●	●		●		●		●	●	●	●				●			●		
PMH-24V50WCAA	●	●	●	●	●	●	●		●	●	●	●		●	●			●	●	●
PMH-24V50WCAJ	●	●	●	●	●	●			●	●	●	●		●	●			●	●	●
PMH-24V50WCAL	●	●	●	●	●	●			●	●	●	●		●	●			●	●	●
PMH-24V50WCAH	●	●	●	●	●	●			●	●	●	●		●	●			●	●	●
PMH-24V100WCAA	●	●	●	●	●	●	●		●	●	●	●		●	●			●	●	●
PMH-24V100WCAJ	●	●	●	●	●	●			●	●	●	●		●	●			●	●	●
PMH-24V100WCAL	●	●	●	●	●	●			●	●	●	●		●	●			●	●	●
PMH-24V100WCAH	●	●	●	●	●	●			●	●	●	●		●	●			●	●	●
PMH-24V150WCB□	●	●	●	●	●	●			●	●	●	●		●	●			●	●	●
PMH-24V200WCB□	●	●	●	●	●	●			●	●	●	●		●	●			●	●	●
PMR-4V320WC□A	●	●		●		●		●	●	●	●				●			●		
PMR-4V320WD□A	●	●		●		●		●	●	●	●				●			●		
PMR-5V320WC□A	●	●		●		●		●	●	●	●				●			●		
PMR-5V320WD□A	●	●		●		●		●	●	●	●				●			●		
PMT-4V350W1AM		●				●	●		●											
PMT-4V350W1AN		●				●			●											
PM□-5V35W1A□	●	●		●		●		●	●	●	●				●			●		
PM□-5V50W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-5V350W1AM		●				●	●		●											
PMT-5V350W1AN		●				●			●											
PM□-15V50W1A□	●	●		●		●		●	●	●	●				●			●		
PMB-12V35W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMB-12V35W1AG	●	●		●		●		●	●	●	●				●			●		
PMB-12V35W1AH	●	●		●		●		●	●	●	●				●			●		
PML-12V35W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-12V35W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-12V35W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-12V35W1AH	●	●		●		●		●	●	●	●				●			●		
PMB-12V50W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMB-12V50W1AG	●	●		●		●		●	●	●	●				●			●		
PMB-12V50W1AH	●	●		●		●		●	●	●	●				●			●		
PML-12V50W1A□	●	●		●		●		●	●	●	●				●			●		

	CE	CB Scheme to IEC 60950-1	CB Scheme to IEC 60335-1, IEC 61558-1, IEC 61558-2-16	SIQ or TUV or NEMKO to EN 60950-1	SIQ to EN 60335-1, EN 61558-1, EN 61558-2-16	UL 60950-1	EAC (Eurasian Customs Union)	CCC (China)	RoHS Directive 2011/65/EU	EN 61000-3-2 (PFC)	EN 61000-3-3 (Flicker)	EN 61000-6-1 (Immunity)	EN 61000-6-2 (Immunity)	EN 55014-2 (Immunity)	EN 55024 (Immunity)	EN 55011 Class B (Emissions)	EN 55022 Class A (Emissions)	EN 55022 Class B (Emissions)	EN 55014-1 (Emissions)	EN 61000-6-3 (Emissions)
Panel Mount Power Supply																				
PMT-12V50W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-12V50W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-12V50W1AH	●	●		●		●		●	●	●	●				●			●		
PML-12V100W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-12V100W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-12V100W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-12V100W1AH	●	●		●		●		●	●	●	●				●			●		
PML-12V150W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-12V150W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-12V150W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-12V150W1AH	●	●		●		●		●	●	●	●				●			●		
PMB-24V35W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMB-24V35W1AG	●	●		●		●		●	●	●	●				●			●		
PMB-24V35W1AH	●	●		●		●		●	●	●	●				●			●		
PML-24V35W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-24V35W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-24V35W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-24V35W1AH	●	●		●		●		●	●	●	●				●			●		
PMB-24V50W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMB-24V50W1AG	●	●		●		●		●	●	●	●				●			●		
PMB-24V50W1AH	●	●		●		●		●	●	●	●				●			●		
PML-24V50W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-24V50W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-24V50W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-24V50W1AH	●	●		●		●		●	●	●	●				●			●		
PML-24V100W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-24V100W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-24V100W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-24V100W1AH	●	●		●		●		●	●	●	●				●			●		
PML-24V150W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-24V150W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-24V150W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-24V150W1AH	●	●		●		●		●	●	●	●				●			●		
PML-24V200W1A□		●				●			●											
PMT-24V200W1AM		●				●	●		●											
PMT-24V200W1AN		●				●			●											
PMT-24V350W1AG		●				●			●											
PMT-24V350W1AM		●				●			●											
PMT-24V350W1AK	●	●		●		●	●		●						●	●		●		
PMT-24V350W1AR	●	●		●		●			●						●	●		●		
PMT-36V350W1A□	●	●		●		●			●						●			●		
PM□-48V150W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-48V350W1A□	●	●		●		●			●						●			●		
PML-D1V100W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-D1V100W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-D1V100W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-D1V100W1AH	●	●		●		●		●	●	●	●				●			●		
PML-D2V100W1A□	●	●		●		●		●	●	●	●				●			●		
PMT-D2V100W1AA	●	●		●		●	●	●	●	●	●				●			●		
PMT-D2V100W1AG	●	●		●		●		●	●	●	●				●			●		
PMT-D2V100W1AH	●	●		●		●		●	●	●	●				●			●		

Standards & Approvals

Delta Standard Power Supplies

	CE	CB Scheme to IEC 60950-1	SIG or TUV or NEMKO to EN 60950-1	UL 60950-1	UL 508	UL 1310	CSA C22.2 No. 107.1-01	CSA C22.2 No. 60950-1	EAC (Eurasian Customs Union)	CCC (China)	RoHS Directive 2011/65/EU	SEMI F47	EN 61000-3-2 (PFC)	EN 61000-3-3 (Flicker)	EN 61000-6-1 (Immunity)	EN 61000-6-2 (Immunity)	EN 55024 (Immunity)	EN 55011 Class B (Emissions)	EN 55022 Class A (Emissions)	EN 55022 Class B (Emissions)
Open Frame Power Supply																				
PJ-12V15WBNA	●	●	●	●					●		●		●	●			●			●
PJ-12V15WCNA	●	●	●	●					●		●		●	●			●			●
PJ-12V15WLNA	●	●	●	●							●		●	●			●			●
PJ-12V30WBNA	●	●	●	●					●		●		●	●			●			●
PJ-12V30WCNA	●	●	●	●					●	●	●		●	●			●			●
PJ-12V30WLNA	●	●	●	●							●		●	●			●			●
PJ-12V50WBNA	●	●	●	●					●		●		●	●			●			●
PJ-12V50WCNA	●	●	●	●					●		●		●	●			●			●
PJ-12V50WLNA	●	●	●	●							●		●	●			●			●
PJ-12V100WBNA	●	●	●	●					●		●		●	●			●			●
PJ-12V100WCNA	●	●	●	●					●		●		●	●			●			●
PJ-12V100WLNA	●	●	●	●							●		●	●			●			●
PJ-12V100W□RA	●	●	●	●							●		●	●			●			●
PJ-12V150W□□A	●	●	●	●							●		●	●			●			●
PJ-24V30WBNA	●	●	●	●					●		●		●	●			●			●
PJ-24V30WCNA	●	●	●	●					●		●		●	●			●			●
PJ-24V30WLNA	●	●	●	●							●		●	●			●			●
PJ-24V50WBNA	●	●	●	●					●		●		●	●			●			●
PJ-24V50WCNA	●	●	●	●					●		●		●	●			●			●
PJ-24V50WLNA	●	●	●	●							●		●	●			●			●
PJ-24V100WBNA	●	●	●	●					●		●		●	●			●			●
PJ-24V100WCNA	●	●	●	●					●		●		●	●			●			●
PJ-24V100WLNA	●	●	●	●							●		●	●			●			●
PJ-24V100W□RA	●	●	●	●							●		●	●			●			●
PJ-24V150WBNA	●	●	●	●					●		●		●	●			●			●
PJ-24V150WCNA	●	●	●	●					●		●		●	●			●			●
PJ-24V150WLNA	●	●	●	●							●		●	●			●			●
PJ-24V150W□RA	●	●	●	●							●		●	●			●			●
PJ-5V15WBNA	●	●	●	●					●		●		●	●			●			●
PJ-5V15WCNA	●	●	●	●					●		●		●	●			●			●
PJ-5V15WLNA	●	●	●	●							●		●	●			●			●
PJ-48V50WBNA	●	●	●	●					●		●		●	●			●			●
PJ-48V50WCNA	●	●	●	●					●		●		●	●			●			●
PJ-48V50WLNA	●	●	●	●							●		●	●			●			●
PJB-24V100W□□A	●	●	●	●							●		●	●			●			●
PJB-24V150W□□A	●	●	●	●							●		●	●			●			●
PJT-12V40WBAB	●	●	●	●							●		●	●			●			●
PJT-12V65WBAB	●	●	●	●							●		●	●			●			●
PJT-12V100WBAB	●	●	●	●							●		●	●			●			●
PJT-12V100WBBB	●	●	●	●							●		●	●			●			●
PJT-15V40WBAB	●	●	●	●							●		●	●			●			●
PJT-15V65WBAB	●	●	●	●							●		●	●			●			●
PJT-15V100WBAB	●	●	●	●							●		●	●			●			●
PJT-15V100WBBB	●	●	●	●							●		●	●			●			●
PJT-18V40WBAB	●	●	●	●							●		●	●			●			●
PJT-18V65WBAB	●	●	●	●							●		●	●			●			●
PJT-18V100WBAB	●	●	●	●							●		●	●			●			●
PJT-18V100WBBB	●	●	●	●							●		●	●			●			●
PJT-24V40WBAB	●	●	●	●							●		●	●			●			●
PJT-24V65WBAB	●	●	●	●							●		●	●			●			●
PJT-24V100WBAB	●	●	●	●							●		●	●			●			●
PJT-24V100WBBB	●	●	●	●							●		●	●			●			●

Standard Products


LED Driver

LNE



Delta LNE series of LED drivers features adjustable output voltage and current level. All the models come in full corrosion resistance aluminum casing and major international safety certifications. LNE series offers the capability to achieve different level of LED brightness via built-in dimming function to meet various application and energy optimization needs. The products are designed and rigorously tested to work with various indoor and outdoor LED lighting conditions. Featuring high surge immunity (CM: 6KV, DM: 4KV) and complying to IP65/IP67 make Delta LNE series an essential part of an energy efficient LED lighting power solution for both indoor and outdoor applications.

Typical Applications



More series will be introduced soon. For a complete list of Delta LED drivers, please visit:

- www.deltapsu.com/products/index for product details
- www.deltapsu.com/marketing-resources for online catalog

Package Types

1 Non-Dimming



LNE-0V0W□□□

- IP65 protection
- With potentiometers to adjust output voltage and constant current level

2 Dimming



LNE-0V0W□□□

- IP67 protection
- With dimming cable to adjust constant current level

All Delta LED drivers are fully compliant with RoHS Directive 2011/65/EU for environmental protection. For more information or enquiries, please do not hesitate to contact your local Delta Electronics distributor or visit www.DeltaPSU.com.

Warranty

Delta warrants that the products ("Products") sold in this catalog will be free of defects in material and workmanship within the warranty period. The warranty does not apply to Products which have been subjected to abuse, misuse, accident, neglect, unauthorized and/or improper installation, operation, use, maintenance, repair or alteration, or accident of unusual deterioration or degradation of the Products or parts thereof due to physical environment beyond the requirements of the Product specifications.

Attention

- Delta will do our utmost in ensuring the accuracy of all information provided in the catalog and datasheets that are officially released and published. However, there may be instance where discrepancy occurs between the catalog and the datasheets. When such case happens, kindly refer to **www.DeltaPSU.com** for the latest catalog and datasheets or the datasheets shall take precedence over the catalog information.
- In our constant pursuit for product and quality excellence to fulfill market and customer demands, Delta shall reserve the rights to revise and update any information in this catalog without prior notification.

EMC Directives

At Delta, all of our products are designed to meet the highest quality standards. All national and international safety certifications including EMC directives are conducted by qualified and independent laboratories. For EMC directives' compliance, the power supplies are tested to ensure compliance as a stand-alone product. Power supplies like the panel mount and open frame types are typically considered component power supply. Therefore, Delta cannot guarantee the system which is installed with Delta's component power supply can meet the related EMC directives. Customers are advised to contact the system manufacturer for confirmation.

Availability

Products with "New" tab are slated for official release with immediate effect, while products with "Coming Soon" tab will be available within the next two months from this catalog's publication month (Refer to cover page). Kindly contact your local Delta distributor for availability, ordering and delivery details. You may also get in touch with us via the Feedback Form on **www.deltapsu.com/feedback**.

More Information

Delta Standard Power Supplies

For more information, find us at:



Facebook

www.facebook.com/DeltaPSU



LinkedIn

www.linkedin.com/company/deltapsu



Twitter

www.twitter.com/DeltaPSU




SlideShare

www.slideshare.com/DeltaPSU

Our responsive homepage adapts to desktop PC and mobile devices effortlessly.

Simply visit www.DeltaPSU.com for all your product needs.

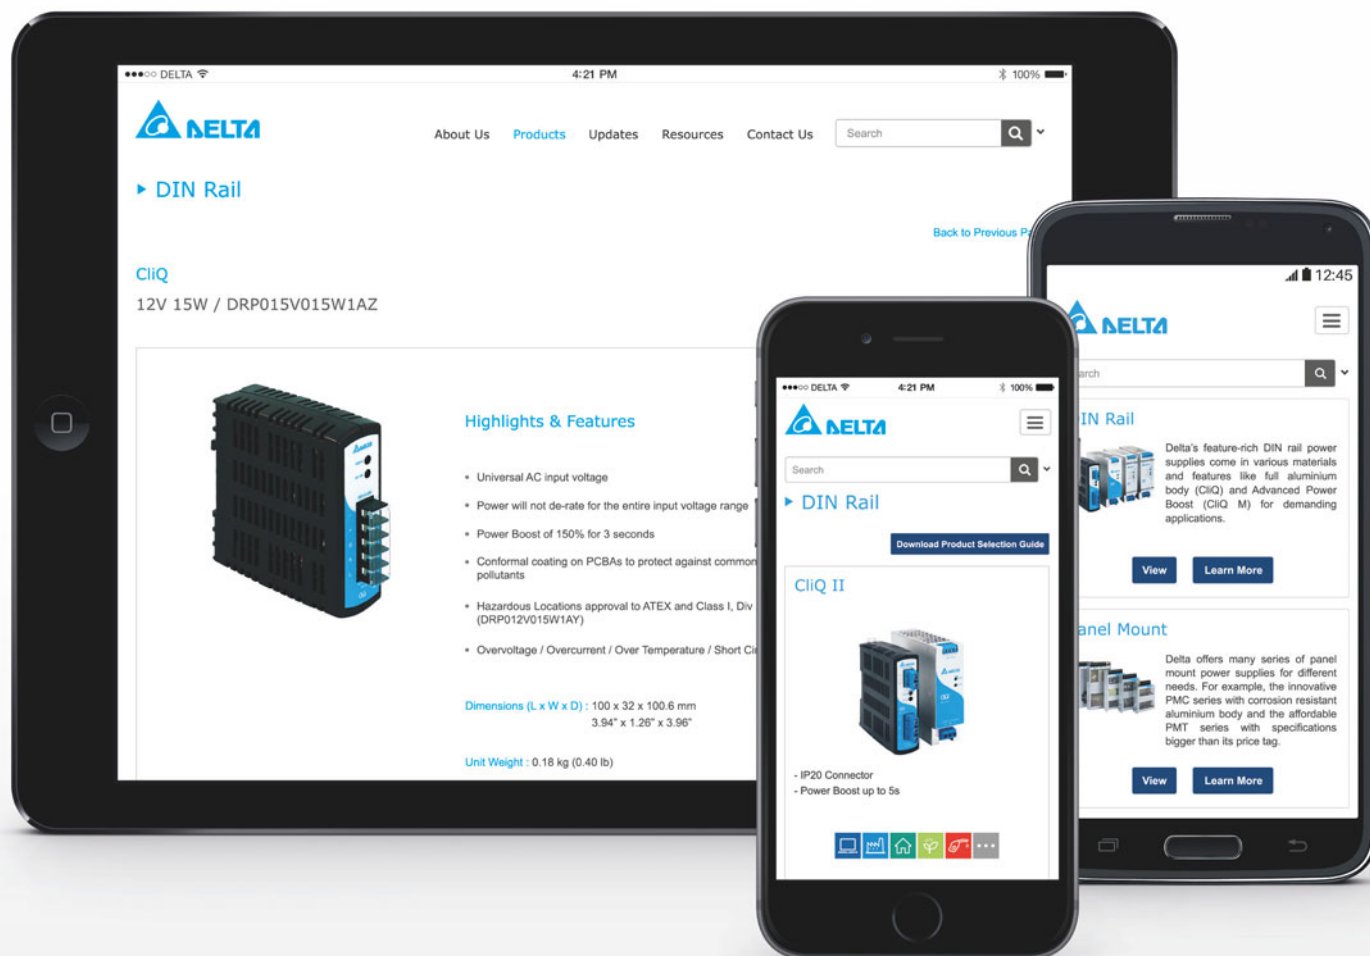



ASIA

Delta Electronics (Thailand) PCL.

909 Soi 9, Moo 4, Bangpoo Industrial Estate
(E.P.Z.), Pattana 1 Rd., T. Phrakasa, A. Muang,
Samutprakarn 10280, Thailand
Tel: +662 709 2800
Fax: +662 709 2827

Delta Greentech (China) Co.,Ltd.

10F, Jiangnan Shipyard Building,
No.600 Luban Road, New Huangpu District,
Shanghai, P.R.C. 200023
Tel: +86 21 63012827
Fax: +86 21 63012307

Delta Electronics, Inc.

3 Tungyuan Road, Chungli Industrial Zone,
Taoyuan County 32063, Taiwan, R.O.C
Tel: +886 3 452 6107
Fax: +886 3 434 3617

Delta India Electronics Pvt. Ltd.

Plot No. 43, Sector - 35, HSIIDC,
Gurgaon, Haryana 122001
Tel: +91 124 4874900
+91 124 4169040
Fax: +91 124 4874945

Delta Electronics (Japan), Inc.

2-1-14 Shibadaimon, Minato-Ku,
Tokyo, 105-0012, Japan
Tel: +81 3 5733 1155
Fax: +81 3 5733 1255

Delta Electronics (Korea), Inc.

1511, Byucksan Digital Valley 6-Cha,
Gasam-dong, Geumcheon-gu,
Seoul, 153-704, Korea
Tel: +82 2 515 5303
+82 2 515 5305
Fax: +82 2 515 5302

NORTH AMERICA

Delta Products Corporation North American Headquarters

46101 Fremont Blvd.
Fremont, CA 94538, U.S.A.
Tel: +1 510 668 5100

CENTRAL AND SOUTH AMERICA

Delta Greentech (Brasil) S.A.

Rua Itapeva, 26 - 3º andar - Bela Vista
01332-000 São Paulo/SP - Brasil
Tel: +55 11 3568 3850
Fax: +55 11 3568 3865

Delta Electronics International Mexico, S.A. de C.V.

Via Gustavo Baz # 2160, Fracc. Ind. La Loma
Tlalnepantla de Baz, Estado de México
C.P. 54060, Mexico
Tel: +52 55 2628 3015

EUROPE

Amsterdam Office Deltronics (Netherlands) B.V.

Zandsteen 15
2132 MZ Hoofddorp, The Netherlands
Tel: +31 20 655 0975
Fax: +31 20 655 0999

Authorized Distributor:

www.DeltaPSU.com | info@deltapsu.com

October 2015 - All information and specifications are subjected to change without prior notice.