

# ADAM-6717

# ADAM-6750

# ADAM-6760D

Intelligent I/O Gateway with Analog Input

Intelligent I/O Gateway with Digital I/O

Intelligent I/O Gateway with Solid-State Relay Output (for DC)



ADAM-6717

## Specifications

### Analog Input

- Channels 8 (differential)
- Sampling Rate 10 or 100 samples/ second (total)
- Resolution 16 bits
- Input Range 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, ±150 mV, ±500 mV, ±1V, ±5 V, ±10 V, ±20 mA, 0 ~ 20 mA, 4 ~ 20mA

### Digital Output

- Channels 4
- Output type Sink 30 V<sub>DC</sub>, 0.1A max. per channel

### Digital Input

- Channels 5
- Dry contact logic 0: Open  
logic 1: Close to ground
- Wet contact logic 0: 0 ~ 3 V<sub>DC</sub>  
logic 1: 10 ~ 30 V<sub>DC</sub>



ADAM-6750


## Specifications

### Digital Input

- Channels 12 support 3KHz counter input
- Dry contact logic 0: Open  
logic 1: Close to ground
- Wet contact logic 0: 0 ~ 3 V<sub>DC</sub>  
logic 1: 10 ~ 30 V<sub>DC</sub>

### Digital Output

- Channels 12 (support 3KHz pulse output)
- Output type Sink 30 V<sub>DC</sub>, 0.1A max. per channel

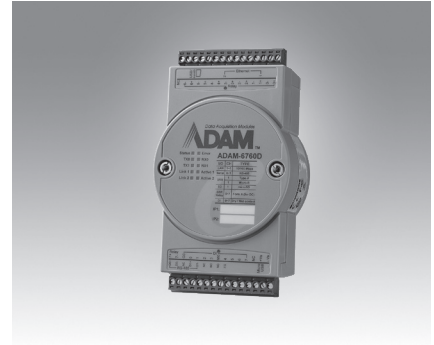

ADAM-6760D

## Specifications

### Digital Input

- Channels 8 support 3KHz counter input
- Dry contact logic 0: Open  
logic 1: Close to ground
- Wet contact logic 0: 0 ~ 3 V<sub>DC</sub>  
logic 1: 10 ~ 30 V<sub>DC</sub>

### Relay Output (PhotoMOS SPST)

- Channels 8 (Form A)
- Contact rating (Resistive and Inductive load) 30 V<sub>DC</sub>  
1 A @25°C  
0.7A @70°C
- Relay-on time 1.3 ms
- Relay-off time 0.8 ms
- Insulation (Relay output to power) 1500Vrms
- Peak Load Current 4A (100ms (1 pulse))
- Total Power Dissipation 400mW / channel
- On-state resistance 0.5Ω

## Common Specifications

### General

- MCU Cortex-A8 32-Bit 1GHz
- Memory DDR3L 512MB
- Storage NAND flash 512MB for system storage  
microSD Slot (Optional)
- OS RT Linux V3.12
- Programming Node-RED Linux C
- Power input 10 ~ 30 V<sub>DC</sub>

- Operation temperature -40 ~ 70°C
- Storage temperature -40 ~ 85°C
- Isolation 2500 V<sub>DC</sub>

### Communication

- LAN port 2 x RJ-45 10/100 Mbps (2MAC ID)
- Serial port 2 x RS-485
- USB port 1 x USB Type-A 2.0,  
1 x USB Micro-B 2.0

## Ordering information

- ADAM-6717-A Intelligent I/O Gateway with Analog Input
- ADAM-6750-A Intelligent I/O Gateway with Digital I/O
- ADAM-6760D-A Intelligent I/O Gateway with Solid-State Relay Output (for DC)