

SPECIFICATIONS

[General Specifications]

Model		PHC-D08	AC Adapter Included
		PHC-D08N	AC Adapter Not Included
Rated Voltage		24VDC (Main Unit) 5VDC (USB Bus Power)	
AC Adapter		Input : 100VAC - 240VAC (50/60Hz) Output : 24VDC	
Operating Voltage Range		90VAC - 264VAC (AC Adapter)	
Rated Current Consumption	Standby	7mA (24VDC)	18mA (5VDC)
	Maximum	0.6A(24VDC)	0.33A(5VDC)
Rated Power Consumption	Standby	0.4W (100VAC)	0.2W (24VDC) 0.1W (5VDC)
	Maximum	16W (100VAC)	14.5W (24VDC) 1.8W (5VDC)
Operating Ambient Temperature		0°C - +40°C	
Operating Ambient Humidity		20% - 85% RH (No Dew or Condensation)	
Storage Ambient Temperature		-10°C - +60°C	
Storage Ambient Humidity		20% - 85% RH (No Dew or Condensation)	
Mounting Location		Indoor	
Mounting Direction		Upright	
Protection Rating		IP 20	
Insulation Resistance		More than 10MΩ at 500VDC between the terminals and the chassis	
Withstand Voltage		1500 VAC applied for 1min (10mA or less) between terminals and chassis without breaking insulation	
Mass (Tolerance ±10%)		370g	
Outer Dimensions		Refer to Outer Dimension Drawing	
Conformity Standards		RoHS Directive (EN 50581) Conforms to the CE requirements : (EN61000-6-4,EN61000-6-2) FCC Part 15 Subpart B Class A UL/CSA 60950-1 (PHC-D08N Only) PSE Conformity AC Adapter	
Interface	USB Port	USB 2.0 Conformity (Bus-powered) Standard Type B (Female)	
	Serial Port	RS-232C Conformity D-Sub 9 pin (Male)	
Communication method	USB Port	CDC (Communication Device Class) protocol	
	Serial Port	Asynchronous (Baud Rate: 9600bit/s, No Parity, Stop bit= 1bit , Data length: 8bit , No flow control)	
External Contact Output		Screwless Terminal Block	
Number of Contacts		8	
Contact Specifications		Non-Voltage Contact (Normally Open Contact)	
Rated Voltage		30VDC	
Rated Current		3A	
Failure Rate P Level		5VDC / 10mA (at a switching rate of 120 operations per minute)	
Applicable Wire		Solid Wire: Φ0.4mm - Φ1.2mm (AWG26 - AWG18) Stranded Wire: 0.2mm ² - 0.75mm ² (AWG24 - AWG20) Element Wire Diameter: Φ0.18mm or more	
Power Output *1		Screwless Terminal Block; 24VDC/500mA or less	
Applicable Wire		Solid Wire : Φ0.4mm~ Φ 1.2mm (AWG26~AWG18) Stranded Wire : 0.2mm ² ~1.25mm ² (AWG24~AWG16) Element Wire Diameter Φ0.18mm or more	
Operating Portion		"Clear" Switch , "Set" Switch	
Accessories		AC adapter (PHC-D08 only) , Installation manual , Rubber feet	
Options		None	
Remarks		CE Marking (PHC-D08N only) *1:Not to be used when operating via USB bus power.	

PHC-D08-W18A-1_3

PATLITE Corporation


[Function Specifications]

Contact Output Control	Contact outputs are controlled in correspondence to control commands
ID Number Setup	The Identification Number (ID) set up is controlled in correspondence to control commands,
"Clear" Switch	Switches off the output to turn all contacts to their normally closed state.
Power Source Display	The operating status is shown by a power LED
Installation Testing Control	Control all contact outputs without external serial transmission control
Operation Mode Switch	Operating Modes are changed with "Set" Switch
Normal Operation	This mode is used for communication frame format protocol with the PHC.
Installation Test	This mode is use to test the performance of the contact outputs after installation.
Firmware Update	This mode is used when updating this product's firmware.



PHC-D08-W18A-2_3

PATLITE Corporation

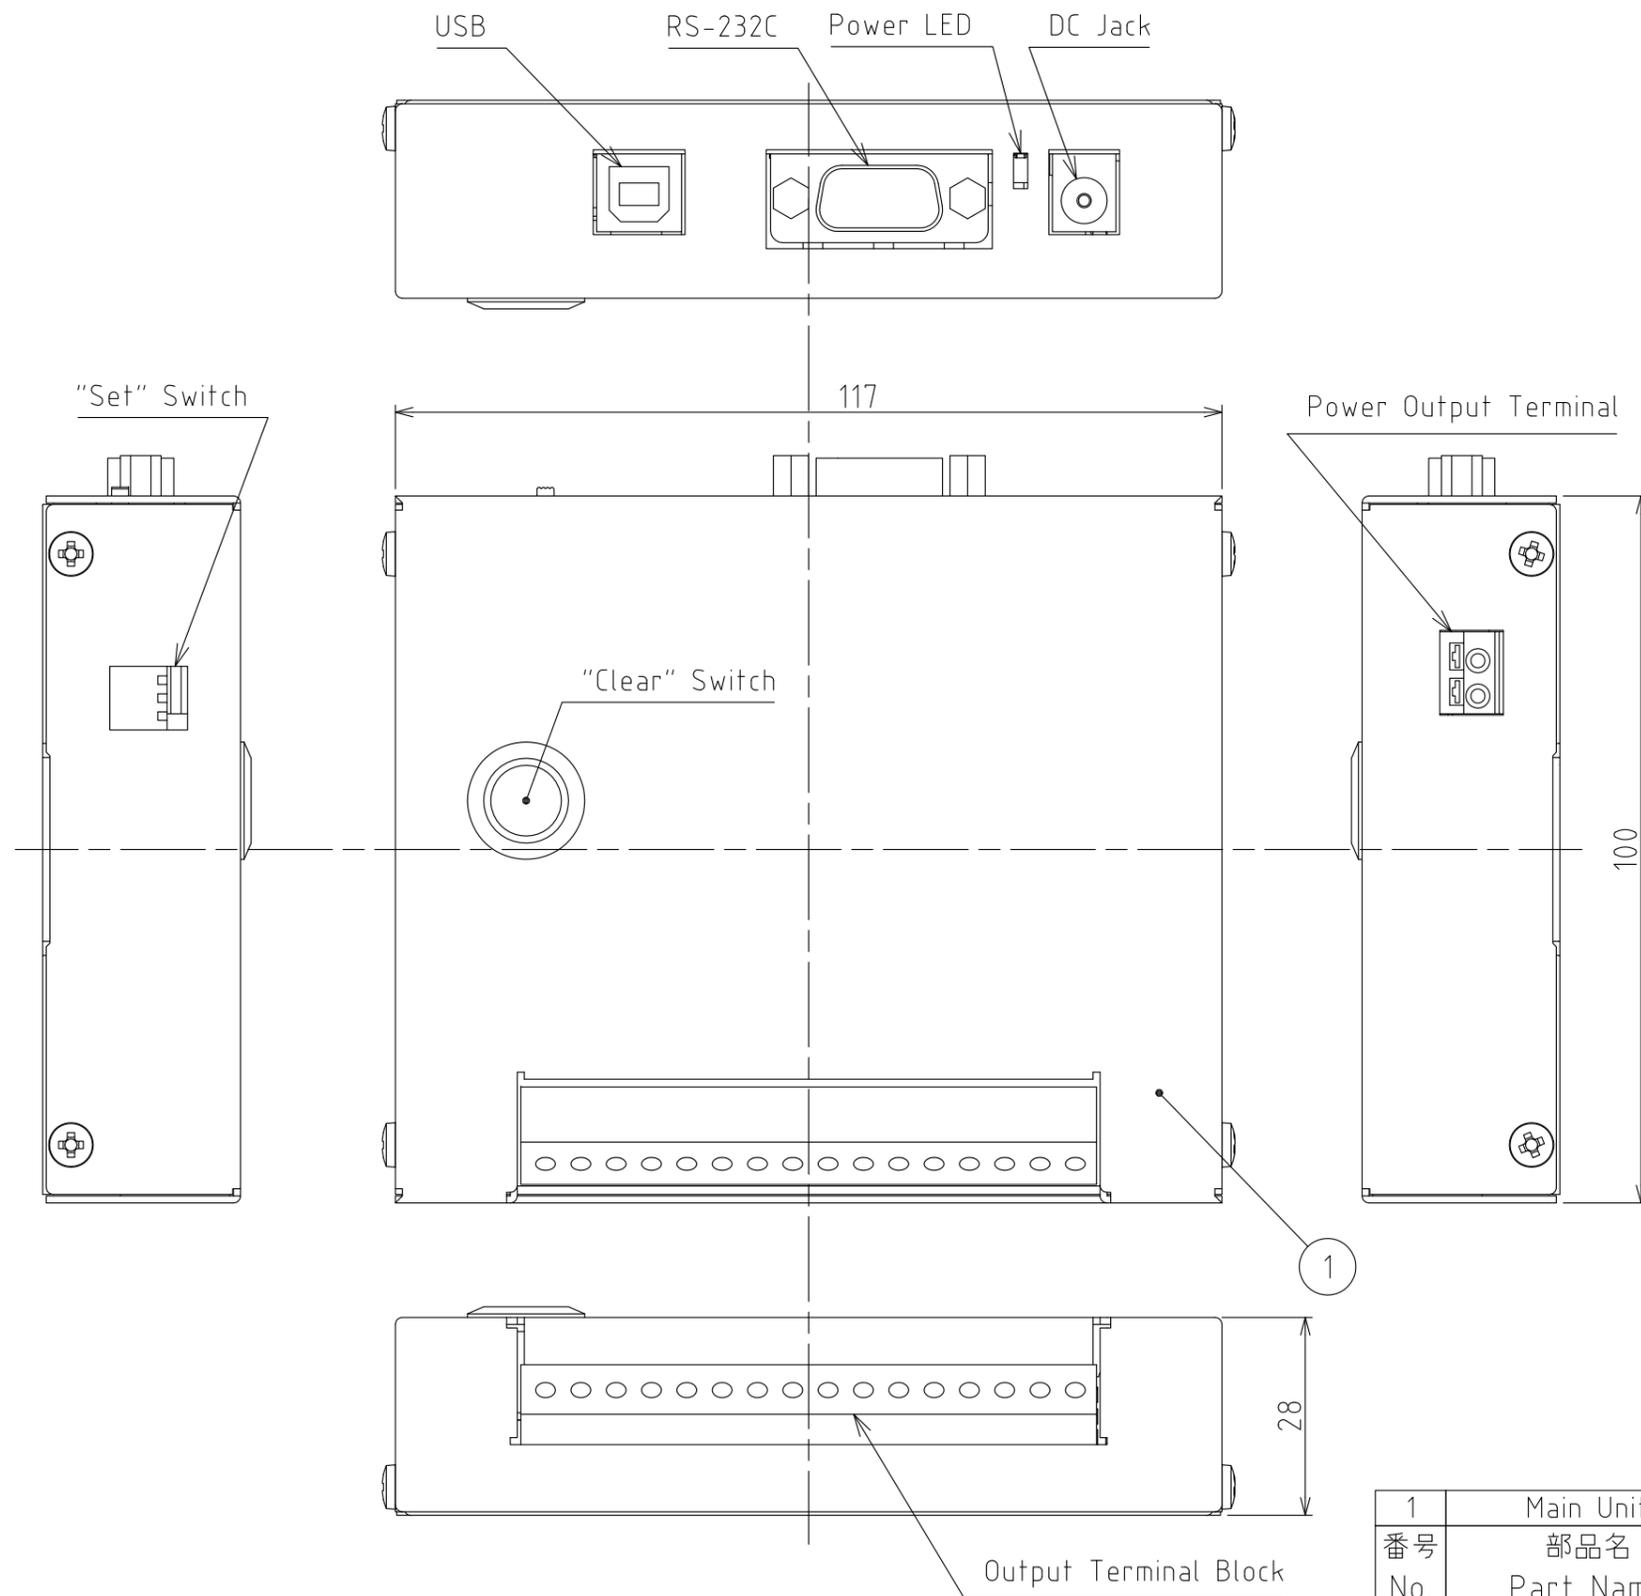

1	Main Unit		1	Off White Paint	
番号 No.	部品名 Part Name	品目コード Part No.	数量 Qty.	材料 & 寸法 & 処理 Material & Size & Finish	記事 Remarks

外観図面
Outer Dimension Drawing

株式会社 パトライト
PATLITE Corporation

PHC-D08-W18A-3_3