

B2NB Series

Ø22/25mm Buzzer


• Improved visibility with high luminance LED



Dimensions



B2NB-B1D

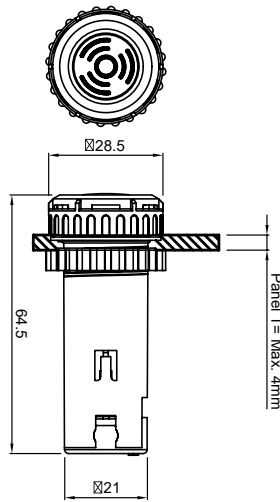

Specifications

Rated voltage/current	12-14VAC/DC 60mA	
Protection	IP30	
Sound level	0.1m	85dB
	1.0m	75dB
Sound mode	Intermittent, Continuous	
Life (electrical)	500 times/continuous use	
Operation Frequency	Max 30 times/min	
Impact	Endurance	500m/s more
	No movement	100m/s more
Vibration	10-55Hz, 3mm	
Operation temperature	-20°C~ +55°C	
Operating Humidity	35~85%RH	
Storage Temperature	-25°C~ +65°	
Recommended wire	Copper wire 14-16 AWG	

KPL Series

Ø22/25mm LED Illuminated Buzzer



Ordering Information

KPL- BZ I R 12V
 ① ② ③

① Sound	I	Interrupted
	C	Continuous
② Color	R	Red
	G	Green
③ Voltage	AC/DC	12V
		24V
	AC	110V
		220V

Specifications

Power Consumption	20mA
Insulation Resistance	100MΩ at 500VDC
Lamp Life	50,000 hrs
Type of Sounds	Interrupted/Continued
Volume	80Phone (dB) Min
Weight	Approx. 24g
Ambient Temp.	-25°C~ +55°C (No Freezing)
Terminal bolt driving torque	0.8N-m (8.16kgf-cm)
Recommended wire	Copper wire 14-16 AWG

Dimensions

