



## UA18/UA30 - Ultrasonic sensors

# Sensors

# UA18/30 Series

## Ultrasonic sensors

This ultrasonic sensor series of UA18 and UA30 sensors provides superior sensing solutions with a good price-performance-ratio for a variety of industry applications. The UA sensors are excellent at contactless position and distance measurement and they are able to detect any target regardless of its colour, transparency or surface.

Because of their resistance to high and low temperatures and immunity against dust, steam and fumes, these UA sensors are especially well suited to harsh environments.

The UA18 and UA30 come in a two digital output version and a combined version with one digital and one analogue output. Also, the sensor range is supplemented with a short-body version of the UA18 with either an analog or a digital output.

Sensing distances go from 40 to 6000 mm and both cable and plug versions are available.

Due to improved technology, an extended sensing distance and a reduced housing length, these sensors make for a state of the art sensor family with high accuracy, versatility and resilience!



## Sensing solutions for industry applications

### Short blind zone

The new UA sensors offer a reduced blind zone which improves the mounting flexibility and minimizes the space required for reliable detection.

### Easy teach-in

Sensing modes are easily set by two simple clicks on the teach-in button or by use of the teach-by-wire function.

### Long sensing distance

The UA sensor family includes a wide range of models covering operational ranges of up to 6000 mm.

### Housing

The sensors come in a standard housing length or a short-body version in both thermoplastic and high-grade stainless steel.

### Harsh environments

The robust, solid-cast housing is specifically designed and well suited to industries where environmental conditions such as lighting, dust, fumes and steam challenge the sensing performance.

### Approvals

CE (EN60947-5-2)  
cULus (UL508)



## Applications


### Detection of trees in mobile spraying systems

Thanks to its 6 m sensing distance, our ultrasonic sensor UA30CAD60 is ideal for tree detection in agricultural spraying equipment used in for instance fruit orchards. A sensor is mounted in front of each sprayer, and its information is used to ensure that only trees are sprayed. As a result, the quantities of pesticides are reduced for the benefit of costs as well as the environment.



### Level detection in large storage silos

In the animal feed industry, feed manufacturers and animal producers share a common interest in solutions that optimize handling of animal feed at the lowest possible cost. Our ultrasonic sensor UA30CAD60 with a 6 m sensing distance is superb at measuring levels in large feed silos. Knowing the feed level in the silo and the required output of animal feed for a certain period is a powerful instrument. Thus, the feed supplier will know the exact quantity necessary for each refill, overstocking is avoided, and each feed portion will be fresher.

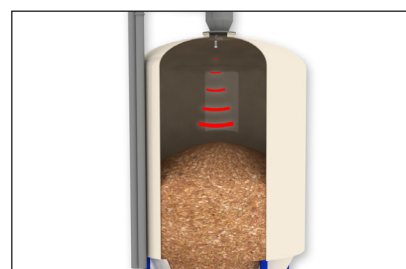

### Distance measurement in street sweepers

Because it is highly resistant to salt water and mechanical stress, our ultrasonic sensor with a stainless steel housing is an excellent choice for distance measurement in street sweepers. This sensor detects the distance to the pavement while ignoring its colour or shape. By knowing the exact distance, the performance of the brushes is optimized.




### Detecting people in front of ATMs

Our short-body UA18CSD/ESD sensors can detect up to 800 mm, and they are not affected by the colour of for instance clothes or vehicles. Therefore, these sensors are highly appropriate for detection of customers in front of an ATM (automatic teller machine) or a drive-through ATM. Moreover, the sensors are very resistant to adverse conditions, and they offer a reliable detection that facilitates communication between customer and machine.



### Ink level measurement in offset printing

In modern offset printers the ink level is automatically monitored and adjusted for the specific print job. The ink fountain controls the amount of ink that enters the inking system. Our short-body UA18CSD/ESD sensors can detect from 40 to 300 mm, and they offer a precise detection of the ink level in the ink fountain. The ink distribution rollers will receive only the requisite quantity of ink, and unnecessary waste is thereby avoided.

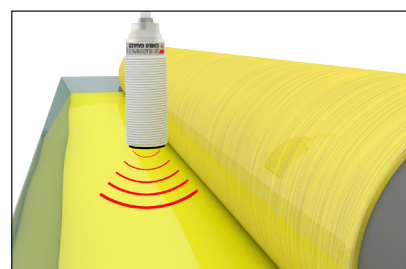


# UA18/30 Series

## Ultrasonic sensors

### Types of detection

#### Diameter measurement

The UA18 and UA30 sensors are ideal for accurate measurement of changing diameters, such as reels and drums in paper, aluminium and other metal manufacturing, textile, plastics and packaging industries. The sensors provide a precise output of the diameter in rolls or drums as it changes when materials wind or unwind.

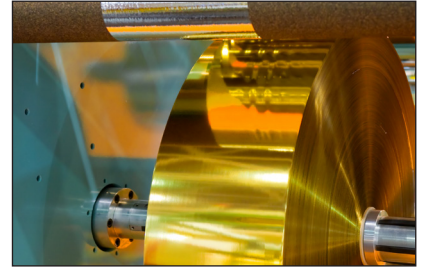

#### Parts counting & presence detection

Because of their superior ability to detect clear, transparent objects and to measure distance, the UA18 and UA30 sensors are a perfect choice for a wide range of applications. Parts are precisely detected and positioned and objects or persons are counted by the UA18 and UA30 sensors in areas dealing with people, robots, glass, fluids, food & beverage, solid objects, car wash and materials handling.




#### Level detection

The UA18 and UA30 sensors are superb at detecting the level of fluids, semi fluids and solids, such as water in a tank or grain in a container. Typical applications include printing machines, hoppers, agricultural manufacturing, food & beverage, water treatment, chemical industry, analysis work and power plants.



#### Tension control

Monitoring and control of speed, position and tension of materials being processed are efficiently and accurately performed by the UA18 and UA30 sensors. The sensors monitor the slope of loops and synchronise the speed between machines, securing a stable working flow. These features are useful in metal working, paper, aluminium, textile and plastics manufacturing as well as packaging and chemical industries.

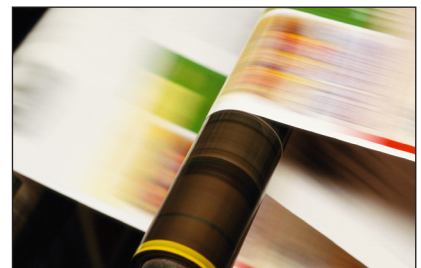

#### Height and size measurement

The UA18 and UA30 sensors are successfully used in applications which measure the height or size of objects moving past the sensor or for stacking operations in industries such as the automotive industry, printing machines, metal working, package & distribution, food & beverage, bottle sorting, agriculture, robots, the electronics industry, glass and materials handling.



## Materials to be detected

### Hard foam




### Wood



### Glass



### Liquid / water

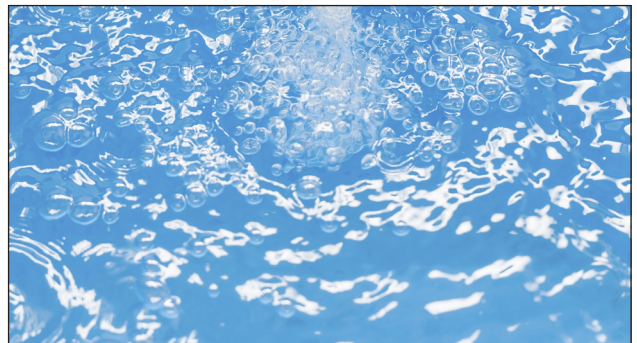

### Metal



### Plastic



### Paint / lacquer



### Bulk material / rock



# UA18/30 Series

## Ultrasonic sensors

### Features and functions UA18/30 CAD/EAD - long housing

#### PBT housing

##### UA18CAD....



UA18: M18 x 83.6 mm (Cable)  
UA18: M18 x 77.7 mm (Plug)

##### UA 30CAD35..



UA30: M30 x 89.5 mm (Cable)  
UA30: M30 x 89.5 mm (Plug)

##### UA 30CAD60..



UA30: M30/Ø40 x 89.5 mm (Cable)  
UA30: M30/Ø40 x 89.5 mm (Plug)

#### Locknut



All UAxxCAD models include two locknuts with retention grips for tight mounting.

#### Stainless steel housing

##### UA18EAD....



UA18: M18 x 83.6 mm (Cable)  
UA18: M18 x 91.7 mm (Plug)

##### UA 30EAD....



UA30: M30 x 93 mm (Cable)  
UA30: M30 x 100 mm (Plug)

#### Nut




All UAxxEAD models includes two nuts for tight mounting.

#### PBT and stainless steel housing




## Digital outputs NPN or PNP

Normal switching operation

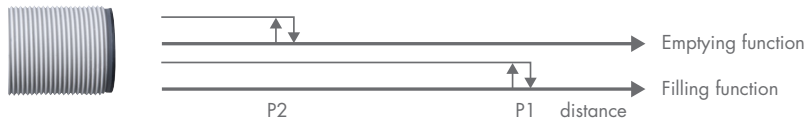


Adjustable hysteresis operation

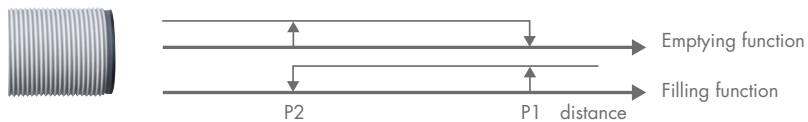


Featuring two digital outputs, the digital UA sensors can operate in two different modes: normal switching or adjustable hysteresis. The outputs are independently teachable via the teach-in button. Modes are easily set and adjusted for on/off or filling/emptying functionality.

## Analogue and digital outputs NPN or PNP

Negative slope

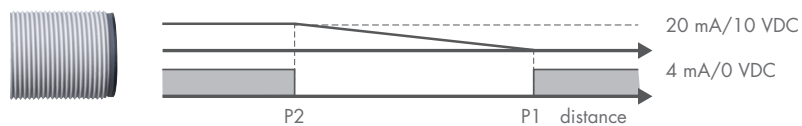

Positive slope

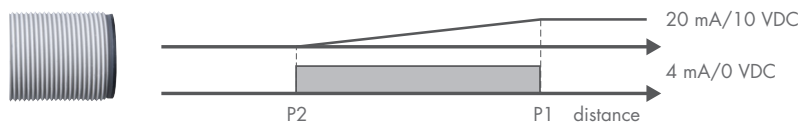

The analogue UA sensors offer a combined output configuration: one digital and one analogue output.

The analogue output of 4-20 mA or 0-10 VDC can be configured as either "positive slope" or "negative slope". The slope is defined by two teachable setpoints.

The digital output forms a sensing window in which the output is either active or inactive between the setpoints (P2 and P1). These are useful features for distance measurement, level measurement, diameter measurement or loop control.



# UA18/30 Series

## Ultrasonic sensors

### The UA18CAD and UA30CAD PBT housing

			2 x Digital outputs		Analogue + Digital output			
			M18	M30	M18		M30	
Connection	Output	Distance	UA18CAD...	UA30CAD...	UA18CAD...		UA30CAD...	
					4-20 mA	0-10 V	4-20 mA	0-10 V
Cable	NPN	50 - 400 mm	04NPTI		04NGTI	04NKTI		
		100 - 900 mm	09NPTI		09NGTI	09NKTI		
		200 - 2200 mm	22NPTI		22NGTI	22NKTI		
		250 - 3500 mm		35NPTI			35NGTI	35NKTI
		350 - 6000 mm		60NPTI			60NGTI	60NKTI
	PNP	50 - 400 mm	04PPTI		04PGTI	04PKTI		
		100 - 900 mm	09PPTI		09PGTI	09PKTI		
		200 - 2200 mm	22PPTI		22PGTI	22PKTI		
		250 - 3500 mm		35PPTI			35PGTI	35PKTI
		350 - 6000 mm		60PPTI			60PGTI	60PKTI
Plug	NPN	50 - 400 mm	04NPM1TI		04NGM1TI	04NKM1TI		
		100 - 900 mm	09NPM1TI		09NGM1TI	09NKM1TI		
		200 - 2200 mm	22NPM1TI		22NGM1TI	22NKM1TI		
		250 - 3500 mm		35NPM1TI			35NGM1TI	35NKM1TI
		350 - 6000 mm		60NPM1TI			60NGM1TI	60NKM1TI
	PNP	50 - 400 mm	04PPM1TI		04PGM1TI	04PKM1TI		
		100 - 900 mm	09PPM1TI		09PGM1TI	09PKM1TI		
		200 - 2200 mm	22PPM1TI		22PGM1TI	22PKM1TI		
		250 - 3500 mm		35PPM1TI			35PGM1TI	35PKM1TI
		350 - 6000 mm		60PPM1TI			60PGM1TI	60PKM1TI
Rated operational voltage (U <sub>b</sub> ) (5 % ripple included)			15 to 30 V DC	12 to 30 V DC		15 to 30 V DC	12 to 30 V DC	15 to 30 V DC
Blind Zone			CAD04: ≤ 50 mm, CAD09: ≤ 100 mm, CAD22: ≤ 200 mm, CAD35: ≤ 250 mm, CAD60: ≤ 350 mm					
No load supply current (I <sub>0</sub> )			CAD04: ≤ 45 mA, CAD09: ≤ 45 mA, CAD22: ≤ 50 mA, CAD35: ≤ 50 mA and CAD60: ≤ 50 mA					
Digital output			Open collector, NPN or PNP by sensor type					
Digital output function			Standard 2 switchpoint or adjustable hysteresis for Level control		Digital output with windows function and analogue output with positive or negative slope			
Digital output current (I <sub>o</sub> )			≤ 500 mA (max. Load capacity 100 nF), (UL508 ≤ 100 mA), CAD60 ≤ 300 mA			≤ 100 mA, CAD60 ≤ 300 mA (max. Load capacity 100 nF)		
Minimum operational current, digital (I <sub>m</sub> )			≤ 0,5 mA					
Off-State current, digital (I <sub>o</sub> )			≤ 10 µA					
Voltage drop, digital (U <sub>v</sub> )			≤ 2.2 V DC @ I <sub>o</sub> max					
Minimum resistive load, analogue			≥ 3 kΩ					
Sensor protection, digital output			Shortcircuit (A), reverse polarity (B) and transients (C)					
Response time			CAD04: ≤ 45 mS, CAD09: ≤ 125 mS, CAD22: ≤ 500 mS, CAD35: 250mS and CAD60: 500mS					
Power on delay (t <sub>i</sub> )			≤ 900 mS, CAD60 ≤ 500 mS		≤ 500 mS		≤ 300 mS	
Repeatability			0.50%, CAD60: 1%			0.20%, CAD60: 1%		
Linear accuracy			1%	0.5%	1%	0.5%		
Resolution			1 mm					
Beam angle			CAD04: ±8°, CAD09: ±7°, CAD22: ±7° and CAD35: ±6°, CAD60: ±7°					
Temperature drift, compensation			≤ 0.1%/°C, Yes					
Hysteresis			≥ 1%, CAD60: ≥ 2%			≥ 0.5%		
Led indications			Target detected (Yellow LED), Echo received (Green LED M30 sensor only)					
Sensitivity control			Teach-in button for setpoint P1 and P2					
Degree of protection			IP67 (IEC 60529; 60947-1)					
Ambient temperature			-20 to +60 (CAD60: 70) °C (-4 to +140 (158) °F) no condensation, Storage -35 to +70 °C (-31 to +158 °F)					
CE marking			According to EN 60947-5-2					
Approvals			CAD04, 07, 22 and 35: cULus (UL508)					
Installation category			III (IEC60664/60664A; 60947-1)					
Pollution degree			3(IEC60664/60664A; 60947-1)					
Vibration			10 to 150 Hz, (1,0 mm/15G; IEC 60068-2-6) in X,Y and Z direction					
Shock			30G /11 mS. 3 positive and 3 negative in X,Y and Z direction					
Material			Body, PBT light grey; Front Epoxy-glass resin, Backpart Grilamide, Teach-in shaft POM					
Cable / Connector			PCV, grey, 2 m, 4 x 0.34 mm <sup>2</sup> , Ø=4.7 mm / M12, 4-pin					
Dimensions			UA18 cable: M18 x 83.6 mm, UA18 plug: M18 x 77.7 mm, UA30 cable/plug: M30 x 89.5 mm,					
Weight incl. packaging			M18 cable version ≤ 100 g, plug version ≤ 35 g, M30 cable version ≤ 160 g, plug version ≤ 90 g					
Accessories, additional			Connectors: CONM14NF... Types					



## The UA18EAD and UA30EAD stainless steel housing

			2 x Digital outputs		Analogue + Digital output			
			M18	M30	M18		M30	
Connection	Output	Distance	UA18EAD...	UA30EAD...	UA18EAD...		UA30EAD...	
					4-20 mA	0-10 V	4-20 mA	0-10 V
Cable	NPN	50 - 400 mm	04NPTI		04NGTI	04NKTI		
		100 - 900 mm	09NPTI		09NGTI	09NKTI		
		200 - 1500 mm	15NPTI		15NGTI	15NKTI		
		350 - 3500 mm		35NPTI			35NGTI	35NKTI
	PNP	50 - 400 mm	04PPTI		04PGTI	04PKTI		
		100 - 900 mm	09PPTI		09PGTI	09PKTI		
		200 - 1500 mm	15PPTI		15PGTI	15PKTI		
		350 - 3500 mm		35PPTI			35PGTI	35PKTI
Plug	NPN	50 - 400 mm	04NPM1TI		04NGM1TI	04NKM1TI		
		100 - 900 mm	09NPM1TI		09NGM1TI	09NKM1TI		
		200 - 1500 mm	15NPM1TI		15NGM1TI	15NKM1TI		
		350 - 3500 mm		35NPM1TI			35NGM1TI	35NKM1TI
	PNP	50 - 400 mm	04PPM1TI		04PGM1TI	04PKM1TI		
		100 - 900 mm	09PPM1TI		09PGM1TI	09PKM1TI		
		200 - 1500 mm	15PPM1TI		15PGM1TI	15PKM1TI		
		350 - 3500 mm		35PPM1TI			35PGM1TI	35PKM1TI
Rated operational voltage (U <sub>b</sub> ) (5 % ripple included)			15 to 30 V DC	12 to 30 V DC	15 to 30 V DC		12 to 30 V DC	15 to 30 V DC
Blind zone			EAD04: ≤ 50 mm, EAD09: ≤ 100 mm, EAD15: ≤ 200 mm, EAD35: ≤ 350 mm					
No load supply current (I <sub>0</sub> )			≤ 50 mA					
Digital output			Open collector, NPN or PNP by sensor type					
Digital output function			Standard 2 switchpoint or adjustable hysteresis for Level control		Digital output with windows function and analogue output with positive or negative slope			
Digital output current (I <sub>s</sub> )			UA18: ≤ 500 mA, UA35: ≤ 300 mA (max. Load capacity 100 nF), (UL508 ≤ 100 mA)		≤ 100 mA (max. Load capacity 100 nF)			
Minimum operational current, digital (I <sub>m</sub> )			≤ 0,5 mA					
Off-State current, digital (I <sub>o</sub> )			≤ 10 µA					
Voltage drop, digital (U <sub>d</sub> )			≤ 2.2 V DC @ I <sub>o</sub> max					
Minimum resistive load, analogue			≤ 500 Ω		≥ 3 kΩ		≤ 500 Ω	≥ 3 kΩ
Sensor protection, digital output			Shortcircuit (A), reverse polarity (B) and transients (C)					
Response time			EAD04: ≤ 50 mS, EAD09: ≤ 125 mS, EAD15: ≤ 500 mS and EAD35: 250mS					
Power on delay (t <sub>i</sub> )			≤ 900 mS	≤ 1500 mS	≤ 500 mS			
Repeatability			0.5%	1%	0.5%		1%	
Linear error					0.5%		1%	
Resolution					1 mm		2 mm	
Beam angle			EAD04: ±10°, EAD09: ±7°, EAD15: ±7° and EAD35: ±7°					
Temperature drift			≤ 0.1% / °C					
Temperature compensation			Yes					
Hysteresis			≥ 1%					
Led indications			Target detected (Yellow LED), Echo received (Green LED M30 sensor only)					
Sensitivity control			Teach-in button for setpoint P1 and P2					
Degree of protection			IP67 (IEC 60529; 60947-1)					
Ambient temperature			-20 to +60 °C (-4 to +140 °F) no condensation, Storage -35 to +70 °C (-31 to +158 °C)					
CE marking			According to EN 60947-5-2					
Approvals			cULus (UL508)					
Installation category			III (IEC60664/60664A; 60947-1)					
Pollution degree			3(IEC60664/60664A; 60947-1)					
Vibration			10 to 150 Hz, (1,0 mm/15G; IEC 60068-2-6) in X,Y and Z direction					
Shock			30G /11 mS. 3 positive and 3 negative in X,Y and Z direction					
Material			Body: AISI 316L; Front: Epoxy-glass resin, Backpart: Grilamide, Teach-in shaft: POM					
Cable			PCV, grey, 2 m, 4 x 0.34 mm <sup>2</sup> , Ø=4.7 mm					
Connector			M12, 4-pin (CONM14NF... Types)					
Dimensions			UA18 cable/plug: M18 x 83.6/91.7 mm, UA30 cable/plug: M30 x 93/100 mm,					
Weight incl. packaging			M18 cable version ≤ 125 g, plug version ≤ 55 g M30 cable version ≤ 220 g, plug version ≤ 150 g					
Accessories, additional			Connectors: CON.14-series					

# UA18/30 Series

## Ultrasonic sensors

### Features and functions UA18 CSD/ESD - short housing

#### PBT housing

#### UA18CSD....



UA18: M18 x 52.9 mm (Cable)  
UA18: M18 x 60.4 mm (Plug)



#### Locknut



All UA18CSD models include two locknuts with retention grips for tight mounting.

#### Stainless steel housing

#### UA18ESD....



UA18: M18 x 52.9 mm (Cable)  
UA18: M18 x 60.4 mm (Plug)

#### Nut



All UA18ESD models includes two nuts for tight mounting.

### Digital outputs NPN or PNP

Normal switching operation  
BK4 Output N.O.



BK4 Output N.C.




Featuring one digital output, the digital UA sensors can be configured as N.O. or N.C.

A windows detection is achieved by teaching two setpoints - P1 and P2.

An object detection is achieved by teaching only one setpoint - P1.

### Analogue output

Negative slope



Positive slope



The analogue UA sensors offer one analogue output.

The analogue output of 4-20 mA or 0-10 VDC can be configured as either "positive slope" or "negative slope". The slope is defined by two teachable setpoints.

## The UA18CSD PBT housing / UA18ESD stainless steel housing

			1 x Digital Output		Analogue Output	
Connection	Output	Distance	PET Housing	Stainless Steel Housing	PET Housing	Stainless Steel Housing
Cable	NPN	40 - 300 mm	<b>UA18CSD03NPTI</b>	<b>UA18ESD03NPTI</b>		
		80 - 800 mm	<b>UA18CSD08NPTI</b>	<b>UA18ESD08NPTI</b>		
	PNP	40 - 300 mm	<b>UA18CSD03PPTI</b>	<b>UA18ESD03PPTI</b>		
		80 - 800 mm	<b>UA18CSD08PPTI</b>	<b>UA18ESD08PPTI</b>		
	4-20 mA	40 - 300 mm			<b>UA18CSD03AGTI</b>	<b>UA18ESD03AGTI</b>
		80 - 800 mm			<b>UA18CSD08AGTI</b>	<b>UA18ESD08AGTI</b>
	0-10 V	40 - 300 mm			<b>UA18CSD03AKTI</b>	<b>UA18ESD03AKTI</b>
		80 - 800 mm			<b>UA18CSD08AKTI</b>	<b>UA18ESD08AKTI</b>
Plug	NPN	40 - 300 mm	<b>UA18CSD03NPM1TI</b>	<b>UA18ESD03NPM1TI</b>		
		80 - 800 mm	<b>UA18CSD08NPM1TI</b>	<b>UA18ESD08NPM1TI</b>		
	PNP	40 - 300 mm	<b>UA18CSD03PPM1TI</b>	<b>UA18ESD03PPM1TI</b>		
		80 - 800 mm	<b>UA18CSD08PPM1TI</b>	<b>UA18ESD08PPM1TI</b>		
	4-20 mA	40 - 300 mm			<b>UA18CSD03AGM1TI</b>	<b>UA18ESD03AGM1TI</b>
		80 - 800 mm			<b>UA18CSD08AGM1TI</b>	<b>UA18ESD08AGM1TI</b>
	0-10 V	40 - 300 mm			<b>UA18CSD03AKM1TI</b>	<b>UA18ESD03AKM1TI</b>
		80 - 800 mm			<b>UA18CSD08AKM1TI</b>	<b>UA18ESD08AKM1TI</b>
Rated operational voltage (U <sub>b</sub> )			10 to 30 V DC (≤ 5% ripple included)			
Blind zone			UA18..D03: ≤ 40 mm, UA18..D08: ≤ 80 mm			
No load supply current (I <sub>s</sub> )			35 mA @ U <sub>b</sub> max			
Digital output			Open collector, NPN or PNP by sensor type			
Output switching function			One open collector transistor output to be configured as N.O. or N.C.		Analogue output with positive or negative slope	
Digital output current (I <sub>a</sub> )			≤ 100 mA (max. load capacity 100 nF)		-	
Minimum operational current (I <sub>m</sub> )			≤ 0,5 mA		-	
Off-State current (I <sub>s</sub> )			35 mA @ U <sub>b</sub> max		-	
Voltage drop (U <sub>v</sub> )			≤ 2.2 V DC @ I <sub>a</sub> max		-	
Output function, analogue			-		AG.. types: 4 to 20 mA, AK.. types: 0 to 10 V DC	
Resistive load, analogue			-		AG.. types: ≤ 500 Ω, AK.. types: ≥ 3 kΩ	
Sensor protection			Shortcircuit, overvoltage and reverse polarity		Shortcircuit and overvoltage	
Response time			UA18..D03: ≤ 60 mS, UA18..D08: ≤ 100 mS		≤ 400 mS	
Power on delay (t <sub>d</sub> )			≤ 100 mS		≤ 900 mS	
Repeatability			0.5%		1.0%	
Linear accuracy			-		1.0%	
Resolution			-		3 mm	
Beam angle			UA18..D03: 7°±2°, UA18..D08: 8°±2°			
Temperature drift			≤ 0.1%/°C @ -20°C to +60°C			
Temperature compensation			Yes			
Hysteresis			≥ 1%			
Led indications			Output ON (Yellow LED), Echo ON (Green LED)			
Sensitivity control			Teach by wire for setpoint P1 and P2			
Degree of protection			IP67 (IEC 60529; 60947-1)			
Ambient temperature			Operating: -20 to +60 °C (-4 to +140 °F) no condensation, Storage: -35 to +70 °C (-31 to +158 °C)			
CE marking			According to EN 60947-5-2			
Approvals			cULus (UL508)			
Installation category			III (IEC60664/60664A; 60947-1)			
Pollution degree			3(IEC60664/60664A; 60947-1)			
Vibration			10 to 55 Hz, 1.0 mm/6G (IEC/EN 60068-2-6)			
Shock			30G /11 mS, 3 directions (IEC/EN 60068-2-27)			
Material			Body: ESD: AISI 316L, CSD: PBT; Front: Epoxy-glass resin, Backpart: Grilamide, Push-button: POM			
Cable			PCV, grey, 2 m, 4 x 0.32 mm <sup>2</sup> , Ø=4.7 mm			
Connector			M12, 4-pin (CON. 14-series)			
Dimensions			UA18 cable: M18 x 52.9 mm, UA18 plug: M18 x 60.4 mm			
Weight incl. packaging			M18CSD cable version ≤ 135 g, plug version ≤ 65 g M18ESD cable version ≤ 160 g, plug version ≤ 55 g			
Accessories, additional			Connectors: CON.14NF-series			

## OUR SALES NETWORK IN EUROPE

### AUSTRIA

Carlo Gavazzi GmbH  
Ketzergasse 374,  
A-1230 Wien  
Tel: +43 1 888 4112  
Fax: +43 1 889 10 53  
office@carlogavazzi.at

### FRANCE

Carlo Gavazzi Sarl  
Zac de Paris Nord II, 69, rue de la Belle Etoile,  
F-95956 Roissy CDG Cedex  
Tel: +33 1 49 38 98 60  
Fax: +33 1 48 63 27 43  
french.team@carlogavazzi.fr

### ITALY

Carlo Gavazzi SpA  
Via Milano 13,  
I-20020 Lainate  
Tel: +39 02 931 761  
Fax: +39 02 931 763 01  
info@gavazziacbu.it

### SPAIN

Carlo Gavazzi SA  
Avda. Iparraguirre, 80-82,  
E-48940 Leioa (Bizkaia)  
Tel: +34 94 480 4037  
Fax: +34 94 431 6081  
gavazzi@gavazzi.es

### BELGIUM

Carlo Gavazzi NV/SA  
Mechelsesteenweg 311,  
B-1800 Vilvoorde  
Tel: +32 2 257 4120  
Fax: +32 2 257 41 25  
sales@carlogavazzi.be

### GERMANY

Carlo Gavazzi GmbH  
Pfnorstr. 10-14  
D-64293 Darmstadt  
Tel: +49 6151 81000  
Fax: +49 6151 81 00 40  
info@gavazzi.de

### NETHERLANDS

Carlo Gavazzi BV  
Wijkermeerweg 23,  
NL-1948 NT Beverwijk  
Tel: +31 251 22 9345  
Fax: +31 251 22 60 55  
info@carlogavazzi.nl

### SWEDEN

Carlo Gavazzi AB  
V:a Kyrkogatan 1,  
S-652 24 Karlstad  
Tel: +46 54 85 1125  
Fax: +46 54 85 11 77  
info@carlogavazzi.se

### DENMARK

Carlo Gavazzi Handel A/S  
Over Hadstenevej 40,  
DK-8370 Hadsten  
Tel: +45 89 60 6100  
Fax: +45 86 98 15 30  
handel@gavazzi.dk

### GREAT BRITAIN

Carlo Gavazzi UK Ltd  
4.4 Frimley Business Park,  
Frimley, Camberley, Surrey GU16 7SG  
Tel: +44 1 276 854 110  
Fax: +44 1 276 682 140  
sales@carlogavazzi.co.uk

### NORWAY

Carlo Gavazzi AS  
Melkeveien 13,  
N-3919 Porsgrunn  
Tel: +47 35 93 0800  
Fax: +47 35 93 08 01  
post@gavazzi.no

### SWITZERLAND

Carlo Gavazzi AG  
Verkauf Schweiz/Vente Suisse  
Sumpfstrasse 3,  
CH-6312 Steinhausen  
Tel: +41 41 747 4535  
Fax: +41 41 740 45 40  
info@carlogavazzi.ch

### FINLAND

Carlo Gavazzi OY AB  
Petaksentie 2-4,  
FI-00661 Helsinki  
Tel: +358 9 756 2000  
Fax: +358 9 756 20010  
myynti@gavazzi.fi

### PORTUGAL

Carlo Gavazzi Lda  
Rua dos Jerónimos 38-B,  
P-1400-212 Lisboa  
Tel: +351 21 361 7060  
Fax: +351 21 362 13 73  
carlogavazzi@carlogavazzi.pt

## OUR SALES NETWORK IN THE AMERICAS

### USA

Carlo Gavazzi Inc.  
750 Hastings Lane,  
Buffalo Grove, IL 60089, USA  
Tel: +1 847 465 6100  
Fax: +1 847 465 7373  
sales@carlogavazzi.com

### CANADA

Carlo Gavazzi Inc.  
2660 Meadowvale Boulevard,  
Mississauga, ON L5N 6M6, Canada  
Tel: +1 905 542 0979  
Fax: +1 905 542 22 48  
gavazzi@carlogavazzi.com

### MEXICO

Carlo Gavazzi Mexico S.A. de C.V.  
Calle La Montaña no. 28, Fracc. Los Pastores  
Naucalpan de Juárez, EDOMEX CP 53340  
Tel & Fax: +52.55.5373.7042  
mexicosales@carlogavazzi.com

### BRAZIL

Carlo Gavazzi Automação Ltda. Av.  
Francisco Matarazzo, 1752  
Conj 2108 - Barra Funda - São Paulo/SP  
Tel: +55 11 3052 0832  
Fax: +55 11 3057 1753  
info@carlogavazzi.com.br

## OUR SALES NETWORK IN ASIA AND PACIFIC

### SINGAPORE

Carlo Gavazzi Automation Singapore Pte. Ltd.  
61 Tai Seng Avenue  
#05-06 UE Print Media Hub  
Singapore 534167  
Tel: +65 67 466 990  
Fax: +65 67 461 980  
info@carlogavazzi.com.sg

### MALAYSIA

Carlo Gavazzi Automation (M) SDN. BHD.  
D12-06-G, Block D12,  
Pusat Perdagangan Dana 1,  
Jalan PJU 1A/46, 47301 Petaling Jaya,  
Selangor, Malaysia.  
Tel: +60 3 7842 7299  
Fax: +60 3 7842 7399  
sales@gavazzi-asia.com

### CHINA

Carlo Gavazzi Automation  
(China) Co. Ltd.  
Unit 2308, 23/F.,  
News Building, Block 1, 1002  
Middle Shennan Zhong Road,  
Shenzhen, China  
Tel: +86 755 83699500  
Fax: +86 755 83699300  
sales@carlogavazzi.cn

### HONG KONG

Carlo Gavazzi Automation  
Hong Kong Ltd.  
Unit 3 12/F Crown Industrial Bldg.,  
106 How Ming St., Kwun Tong,  
Kowloon, Hong Kong  
Tel: +852 23041228  
Fax: +852 23443689

## OUR COMPETENCE CENTRES AND PRODUCTION SITES

### DENMARK

Carlo Gavazzi Industri A/S  
Hadsten

### MALTA

Carlo Gavazzi Ltd  
Zejtun

### ITALY

Carlo Gavazzi Controls SpA  
Belluno

### LITHUANIA

Uab Carlo Gavazzi Industri Kaunas  
Kaunas

### CHINA

Carlo Gavazzi Automation (Kunshan) Co., Ltd.  
Kunshan

## HEADQUARTERS

Carlo Gavazzi Automation SpA  
Via Milano, 13  
I-20020 - Lainate (MI) - ITALY  
Tel: +39 02 931 761  
info@gavazziautomation.com



**CARLO GAVAZZI**  
Automation Components

*Energy to Components!*

www.gavazziautomation.com

