

# Product information

## Programmable Display V9150iX Series

Read online: <http://monitouch.fujielectric.com/site/v9-e/v9150ix-01.html>

### V9150iX Series



#### V9150iX



#### V9150iXD



- [Product specifications](#)
- [Interface / Dimensions and Part Names](#)
- [System Configuration](#)
- [Model](#)

## Dimensions and Part Names

		V9150iX
Power supply	Rated voltage	100-240V AC/ 24V DC
	Permissible range of voltage	AC: -15%, +10%/ DC: ±10%
	Permissible momentary power failure	AC within 20ms, DC within 1ms
	Demand (maximum rating)	AC: 90VA or less/ DC: 40W or less
Insulation resistance		DC500V 10MΩ or more

		V9150iX
Physical environment	Ambient temperature	0~40°C *1
	Ambient humidity	85%RH or less (without dew condensation) *1
	Operation altitude	2,000 meters or lower
	Atmosphere	Not to be exposed to corrosive gas, or conductive dust
	Storage temperature	-10~60°C *1
	Storage humidity	85%RH or less (without dew condensation) *1
	Overvoltage category	Category II
	Contamination level	Level 2
Mechanical operating conditions	Resistance to oscillation	Complies with JIS B 3502 (IEC61131-2) Vibration frequency: 5-9Hz, pulsating with:3.5mm, 9-150Hz, Acceleration: 9.8m/s2(1G),X,Y,Z: 3 directions (10 times each)
	Resistance to shock	Complies with JIS B 3502 (IEC61131-2) Peak acceleration: 147m/s2(15G), X,Y,Z: 3 directions, three times each (18 times in total)
Electric operating conditions	Resistance to noise	Noise voltage: 1,500Vp-p*2, pulse width: 1μs, pulse rise time: 1ns
	Resistance to static discharge	Complies with IEC61000-4-2, contact: 6kV, air: 8kV
Installation conditions	Grounding	Grounding resistance: Less than 100Ω, FG=SG
	Structure	Front panel: Complies with IP66, Type 4X/13 (when waterproof gasket is installed)*3 Rear cover: Complies with IP20 Form: Single unit, Installation method: Panel mounting
	Cooling system	Natural air cooling
	Dimensions W*H*D(mm)	382.8×312.8×80.8
	Panel cutout (mm)	369.4×299.4 (+0.5/-0)
Case color		-
Material		Front case:Aluminum Rear case:PC resin

- \*1: Keep wet bulb temperature under 39°C to avoid malfunction.
- \*2: V9150iXD:1000Vp-p
- \*3: Available or complying after release.

# Performance Specifications


Screen memory (FROM)		64MB
Backup memory (SRAM)		800KB
Display	Display device	TFT color LCD
	Resolution	1024x768
	Display size	15"
	Colors	16.7 million *4
	Backlight	LED
	Backlight life	100,000 hours
Touch switch	Type	Analog resistance film
Function switch	Quantity	8
External interface	D-Sub 9-pin (CN1)	RS-232C/ RS-485(2-wire system)/ RS-422(4-wire system), Asynchronous type, Data length: 7,8 bits, Parity: even, odd, none, Stop bit: 1, 2 bits, Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200, 187500*5bps
	Modular 8-pin (MJ1/MJ2)	RS-232C/ RS-485(2-wire system), Asynchronous type, Data length: 7,8 bits, Parity: even, odd, none, Stop bit: 1, 2 bits, Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200 bps
	SD card	One card slot provided as standard
	Ethernet	1ch, Baud rate: 100Mbps, 10Mbps
	Wireless LAN	-
	USB	Type A, Type mini-B(Ver.2.0)
	Sound output	1ch provided as standard
Clock	Backup period	5 years (Ambient temperature 25°C)
	Calendar accuracy	Gap ±90 sec. per month (Ambient temperature 25°C, when power is not supplied)
Standard	CE marking *6	EN61000-6-2,EN61000-6-4,EN50581
	UL·cUL *6	UL508
	KC	Compliant
	Radio Act	-

- \*4: For the display of pictures, 3D parts and videos only. Other parts are displayed in 65,536 colors.

- \*5: Available only when connected with SIEMENS MPI/PPI.
- \*6: DC type only.

## Dimensions and Part Names

(Unit: mm)

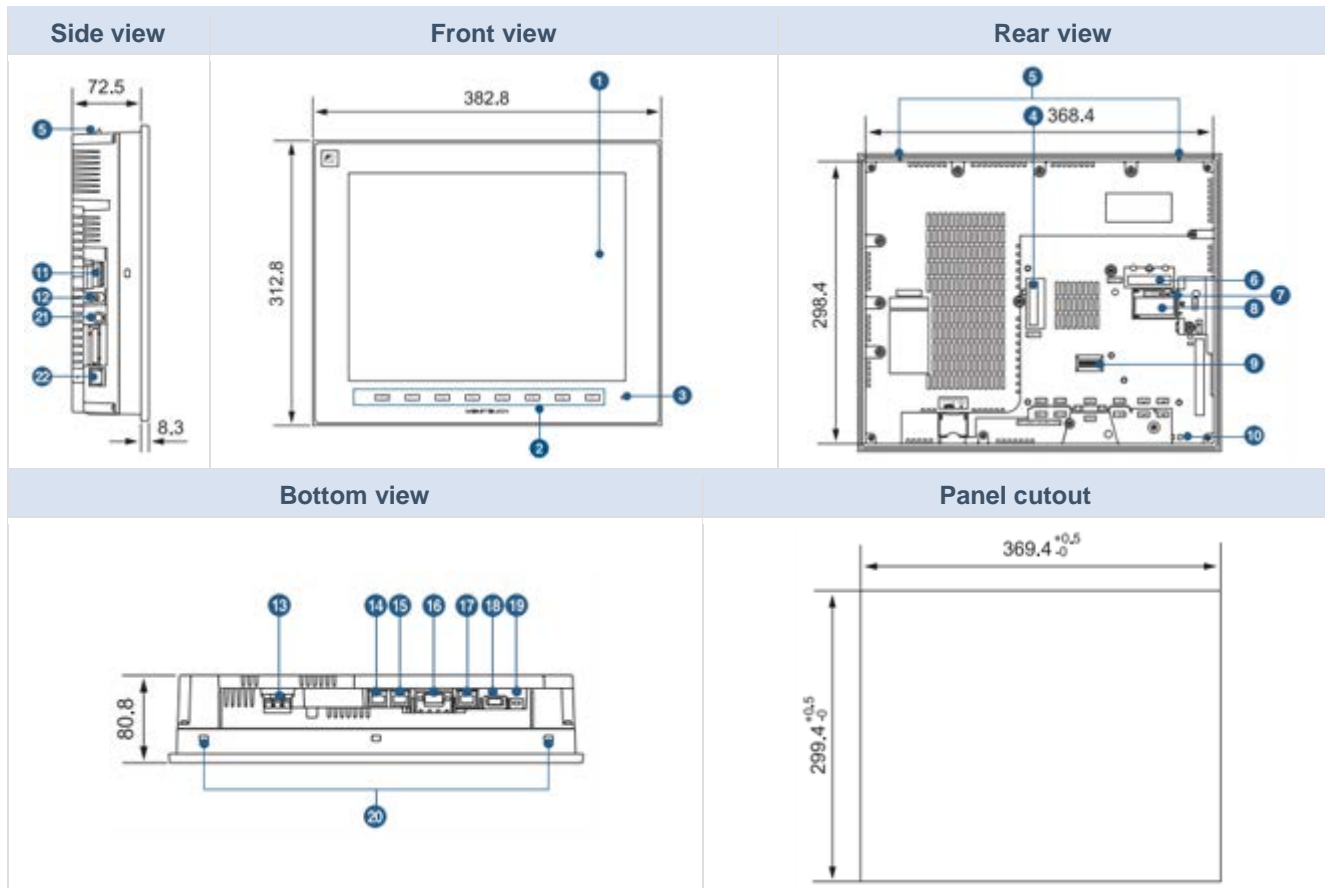


### Part Names

1. **1** Display
2. **2** Function switch
3. **3** Power lamp
4. **4** Communication unit connector (EXT1)
5. **5** Fall prevention hook
6. **6** Optional unit connector (EXT2)
7. **7** SD card access LED
8. **8** Battery holder
9. **9** DIP switch
10. **10** USB cable holding hole
11. **11** SD card connector
12. **12** Sound output connector (AUDIO)
13. **13** Power input terminal block
14. **14** Modular jack 1 (MJ1)
15. **15** Modular jack 2 (MJ2)
16. **16** PLC connector (CN1)

- 17. 17 100BASE-TX/10BASE-T port (LAN)
- 18. 18 USB-A (U-A)
- 19. 19 USB mini-B (U-B)
- 20. 20 Screw hole
- 21. 21 Wireless LAN external antenna connector(WLAN)
- 22. 22 100BASE-TX/10BASE-T port (LAN2)

## System Configuration

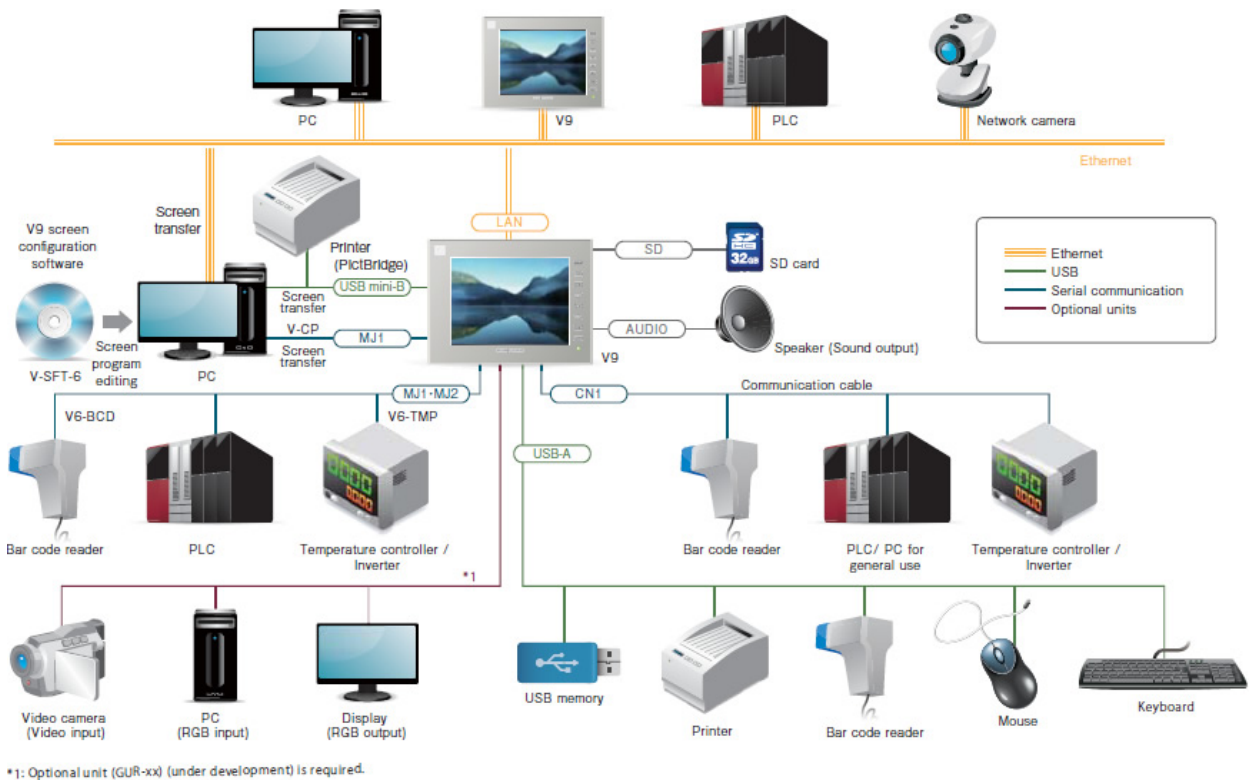

## Models

V915



i



**【Power supply】**

**D:** 24V DC

**Unequipped:** 100-240V AC

**【Display device】**

**X:** TFT color LCD (XGA)

**【Interface】**

**i:** With a built-in LAN port

**【Touch switch】**

**0:** Analog resistance film