




MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077

100NC-220A

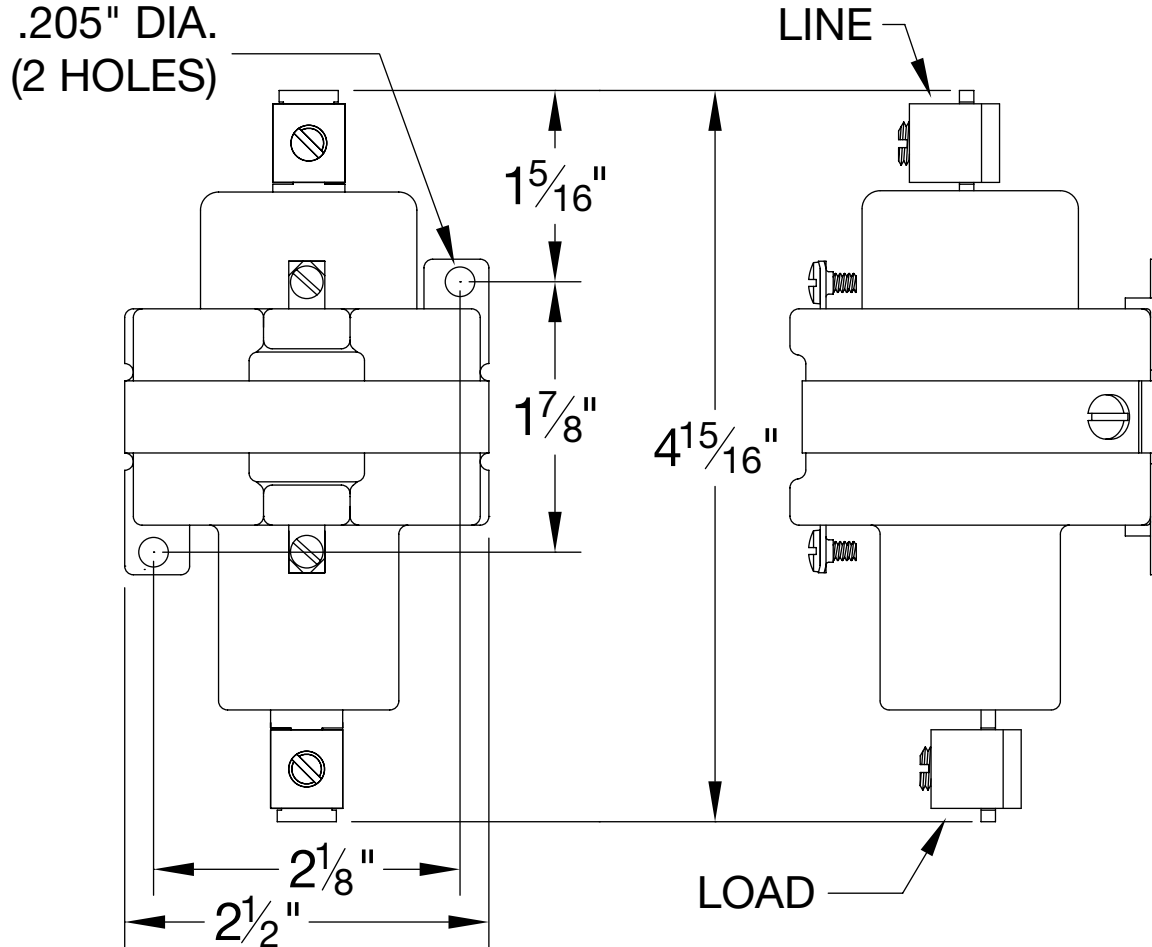

- * CONTACT RESISTANCE .001 ohms
- * DIELECTRIC WITHSTAND 2,500 VAC RMS
- * OPERATE TIME 45 MILLISECONDS
- * RELEASE TIME 60 MILLISECONDS
- * RATINGS:

CONTACTS: 100 AMPS @ 240 VAC

80 AMPS @ 480 VAC

COIL: 220 V 50/60 HZ CURRENT: 55 mA

RESISTANCE: 1,400 Ω VA: 11.4

WATTAGE: 4.2 RESISTIVE OR GENERAL PURPOSE

- * TEMPERATURE RANGE -35° TO $+85^{\circ}$ C
- * COIL TERMINALS #6 BINDING HEAD SCREWS
TORQUE TO 7 IN-LB
- * LOAD TERMINALS 2-8 A.W.G. COMPRESSION
TYPE TORQUE TO 45 IN-LB
- * SINGLE POLE / SINGLE THROW
- * MAGNETICALLY ACTIVATED
- * MERCURY CONTACTOR

J.J.S. May 26, 2015

Contactors - Relays - Switches

<http://www.mdious.com>