



MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710


Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077



360NO-24A-18

INDUSTRIAL CONTROL EQUIPMENT

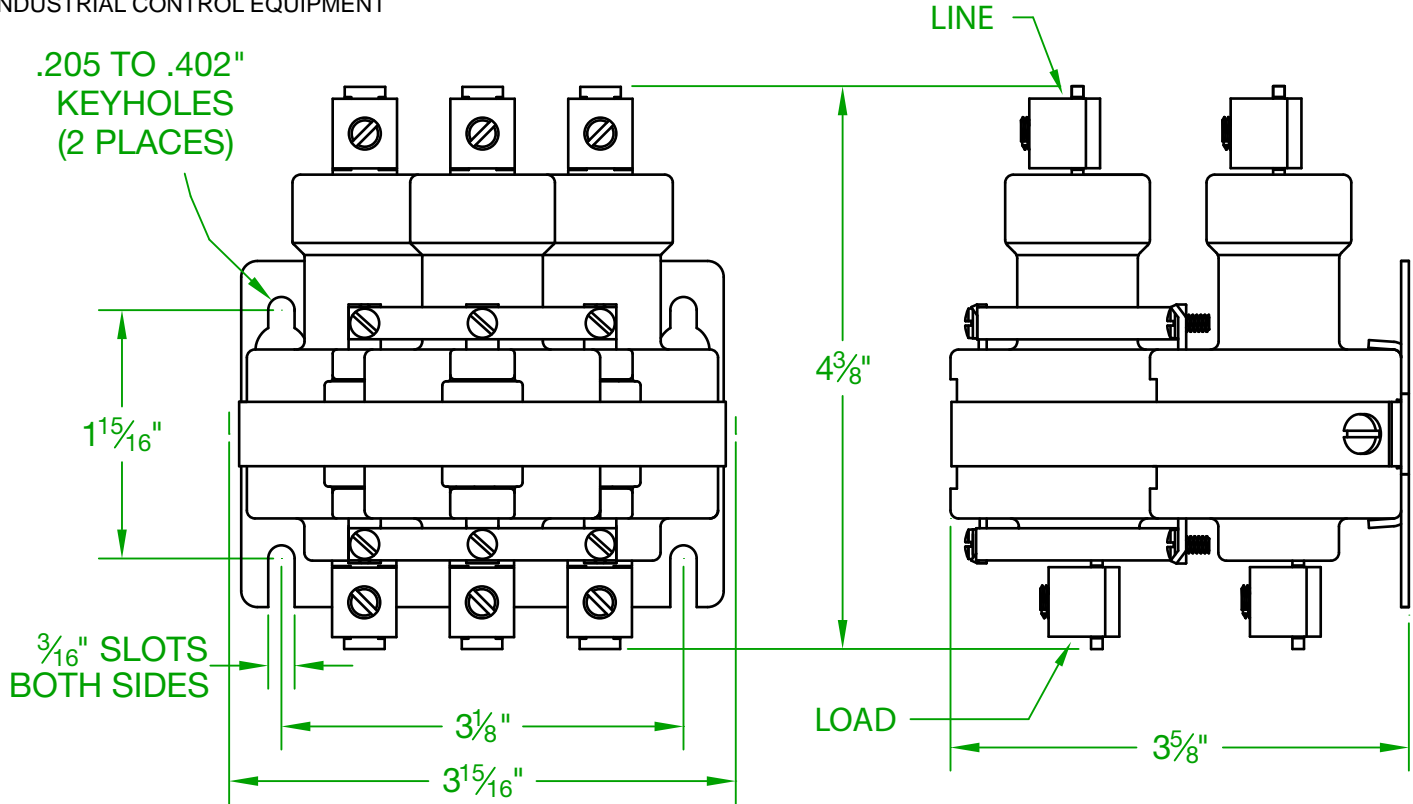

* CONTACT RESISTANCE .002 ohms

* TEMPERATURE RANGE -35° TO +85° C

* DIELECTRIC WITHSTAND 2,500 VAC RMS

* COIL TERMINALS #6 BINDING HEAD SCREWS TORQUE TO 7 IN-LB

* OPERATE TIME 50 MILLISECONDS

* LOAD TERMINALS 2-8 A.W.G. COMPRESSION TYPE TORQUE TO 45 IN-LB

* RELEASE TIME 80 MILLISECONDS

* RATINGS:

* 3 POLE / SINGLE THROW

CONTACTS: 60 AMPS @ 480 VAC RES.
48 AMPS @ 600 VAC RES.

* MAGNETICALLY ACTIVATED

COIL: 24V 50/60 Hz

CURRENT: 777mA

RESISTANCE: 16.7Ω

* MERCURY CONTACTOR

VA: 18.6 WATTAGE: 10.2

* LIFE CYCLE ENDURANCE TESTS: U.L. 508 @ 100,00 & CSA 22.2 @ 250,000 CYCLES

Contactors - Relays - Switches

J.J.S. 03-30-11

<http://www.mdious.com>