


Transformer Specifications	
PRIMARY VOLTAGE(S)	690
SECONDARY VOLTAGE(S)	120x240
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	NO UL OR C.S.A APPROVALS
ESTIMATED WEIGHT	5.1 LBS

TEST REQUIREMENTS			
WINDING	H2-H1	X4-X3	X2-X1
D.C. VOLTS	480	91.68 *	91.68 *
LOAD VOLTS	480	83.48	83.48
F.L. AMPS	0.277	0.625	0.625
HI-POT	3000V		1800V
EXCITING AMPS	0.056AMPS MAX @ 480VDLTS, 50HZ		
EXCITING WATTS	8.25 MAX		

* VOLTAGE TOLERANCE IS 90.99 TO 92.36 VOLTS




CONNECTION DIAGRAM

NOTE:
1. ALL MEASUREMENTS IN INCHES(MM).

PACKAGED ACCESSORIES	
1	PAIR OF J2 JUMPERS
-	-
-	-

MICRON
TRANSFORMER
1511 W. 23rd STREET, Suite 200, DAK BROOK, ILL.
TEL: (630)664-4660 WWW.MICRONPOWER.COM

DATE	6/10/11	MAW	J.G.V	CHECKED	APPROVED
MICRON PART NO.	B150-0653-5FA7777A2				
SCALE	C				
SIZE	B150-0653-5F				

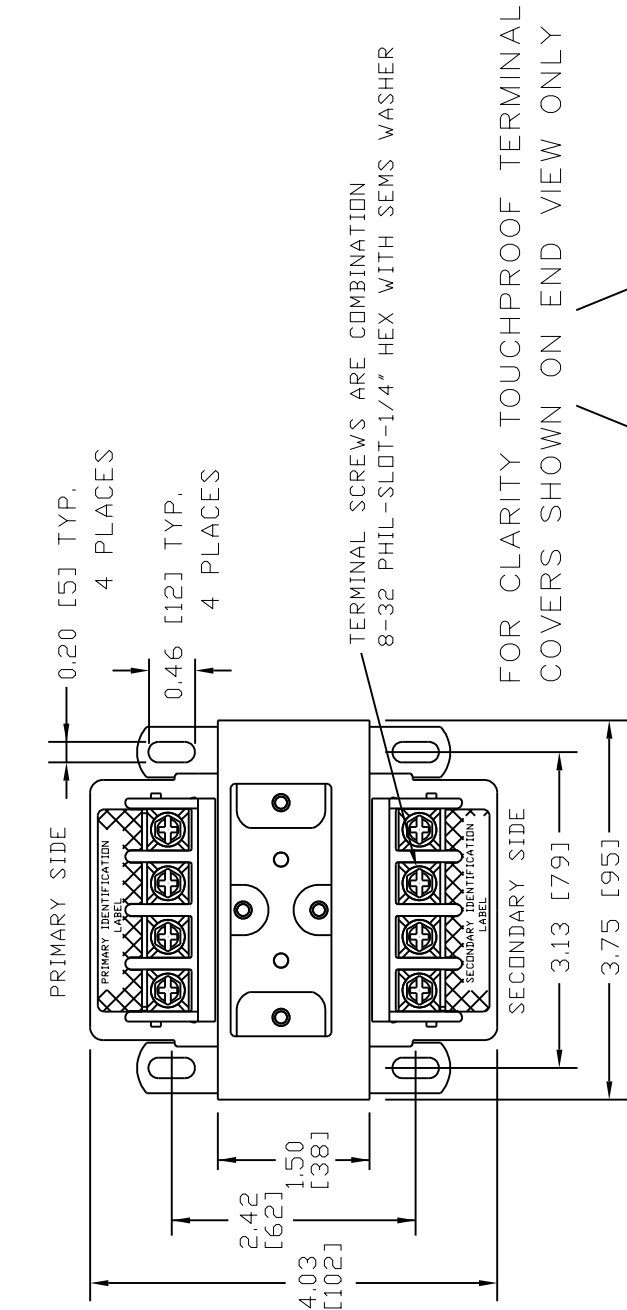

TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

FOR CLARITY TOUCHPROOF TERMINAL COVERS SHOWN ON END VIEW ONLY

PRIMARY SIDE
SECONDARY SIDE

MICRON
TRANSFORMERS
1511 W. 23rd STREET, Suite 200, DAK BROOK, ILL.
TEL: (630)664-4660 WWW.MICRONTRANSFORMERS.COM

QTY. 1

150VA
PRIMARY: 690
SECONDARY: 120X240
FREQUENCY: 50/60HZ

MADE IN USA

Cat. **B150-0653-5F**
SERIES 2

24114



MAIN PRODUCT IDENTIFICATION LABEL

MICRON
TRANSFORMERS
1511 W. 23rd STREET, Suite 200, DAK BROOK, ILL.
TEL: (630)664-4660 WWW.MICRONTRANSFORMERS.COM

150VA 50/60HZ
TEMP CL. 130°C



CAT. **B150-0653-5F**
NO. **SERIES 2**

24114

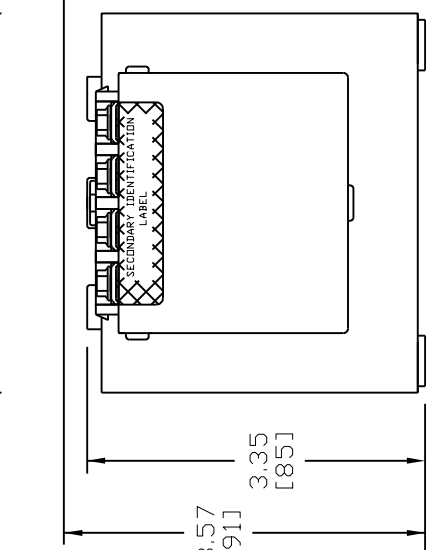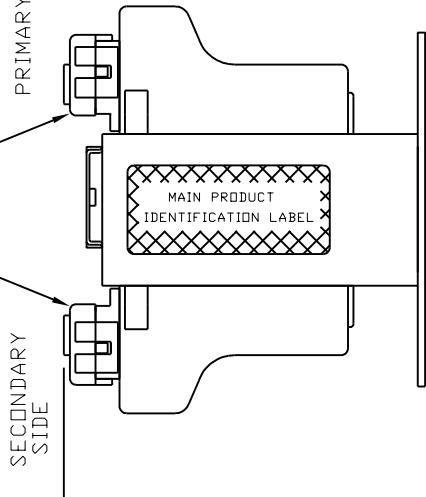

SECONDARY IDENTIFICATION LABEL

PRIMARY IDENTIFICATION LABEL

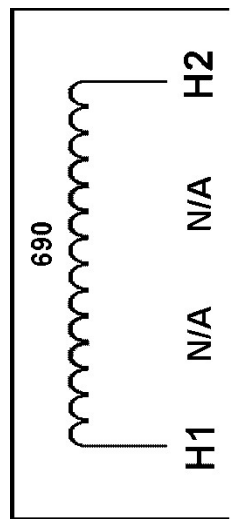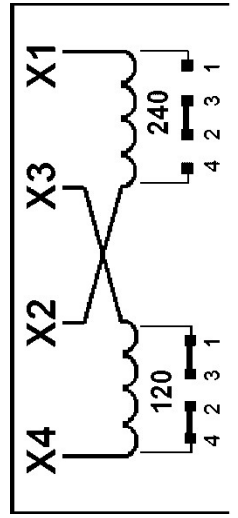

TEST SPECS	REVISED	J.V	6/21/11
A NEW	AND04874	J.V	6/10/11
ECL	REVISIONS	BY	DATE