
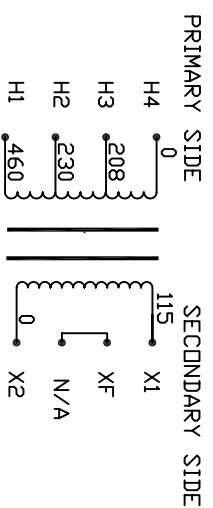
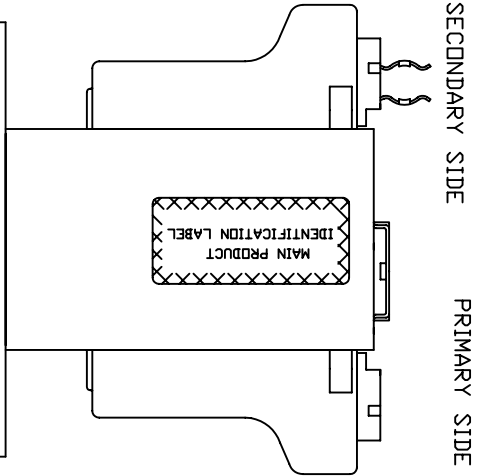
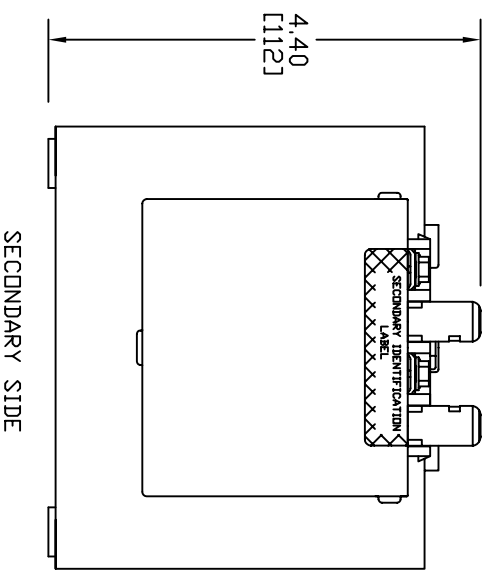




Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460
SECONDARY VOLTAGE(S)	115
RATED V.A.	300
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	11.2 LBS

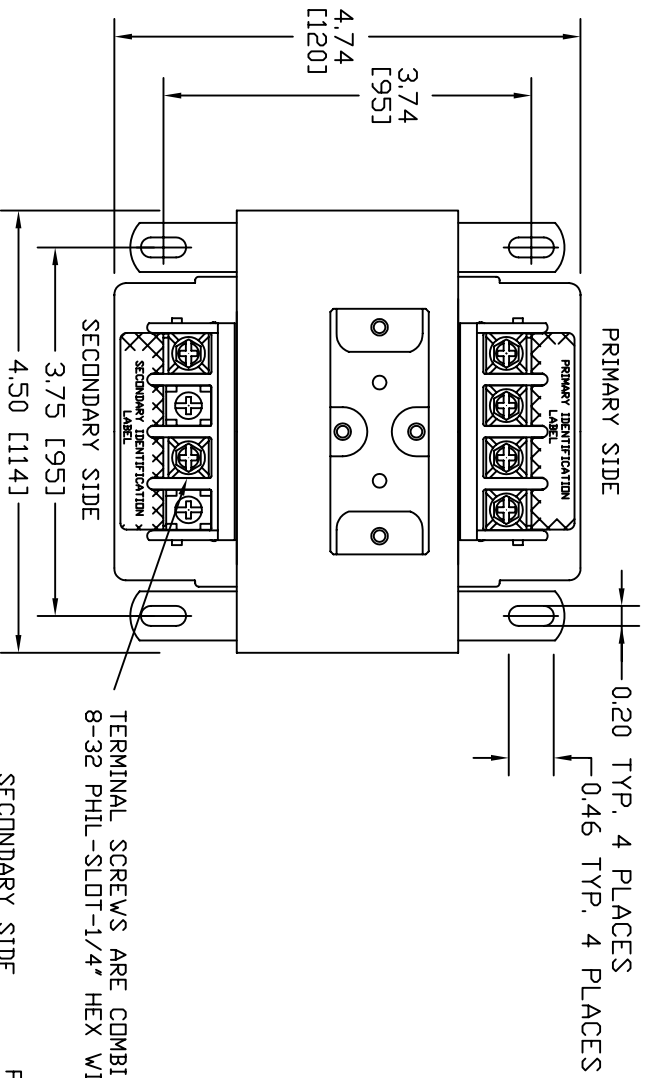

INTERNALLY JUMPERED TO FUSE TERMINAL CONNECTION DIAGRAM

NOTE:

1. TORQUE CONNECTIONS TO 16 LB-IN
2. FUSE CLIPS TO ACCOMADATE 13/32-1 1/2"
3. ALL MEASUREMENTS IN INCHES (MM)

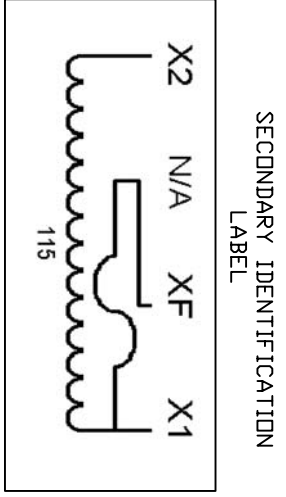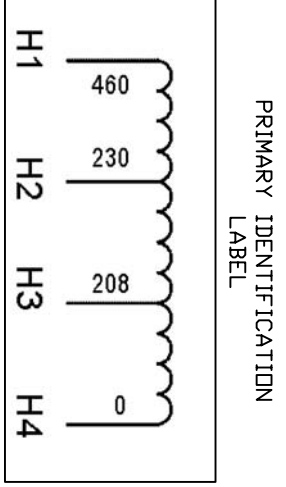

MAIN PRODUCT IDENTIFICATION LABEL

**MICRON** IMPERVITRAN  
 THE CONTRACTOR'S CHOICE  
 U.S. PAT. NO. 3,516,040  
 800 664-4660  
 www.microntransformers.com

**Impervitran**  
 300VA 50/60HZ  
 TEMP CL. 130°C

CAT. NO. B300MBT13XKF  
 SERIES 2  
 47074

UL LISTED 702X

PACKAGED ACCESSORIES			
DATE	11/26/07	DESIGNED	APPROVED
RELEASE DATE		CHECKED	
TRANSFORMER		MANUFACTURED	
MICRON			
SCALE			
SIZE			
TYPE			
DESCRIPTION	B300MBT13XKF		

MICRON INDUSTRIES CORPORATION  
 11501 S. HUNTER STREET, SUITE 100  
 TULSA, OKLAHOMA 74116  
 TEL: (800)664-4660 FAX: (918)515-1850