

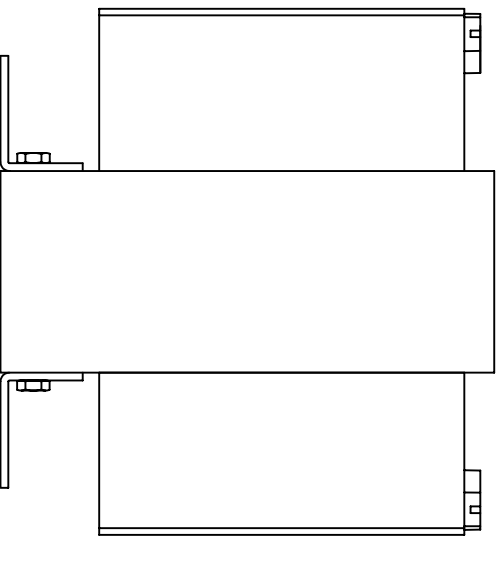
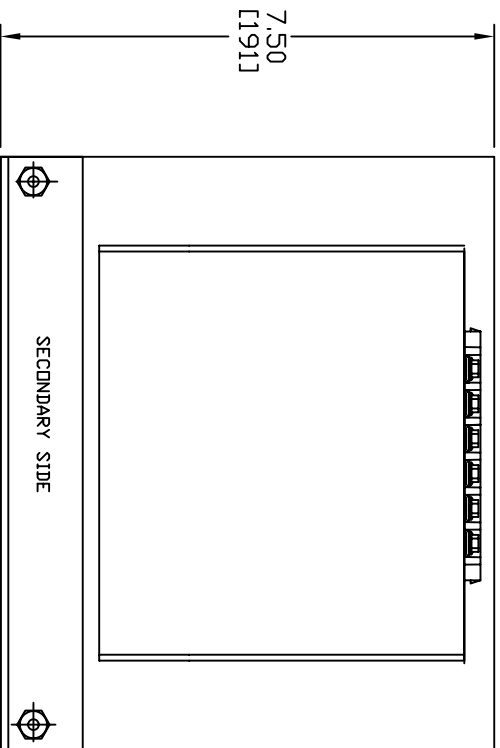


Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLY RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	3000
RATED FREQUENCY	50/60
INSULATION CLASS	180
AGENCY APPROVALS	UL/CUL
ESTIMATED WEIGHT	69.8 LBS

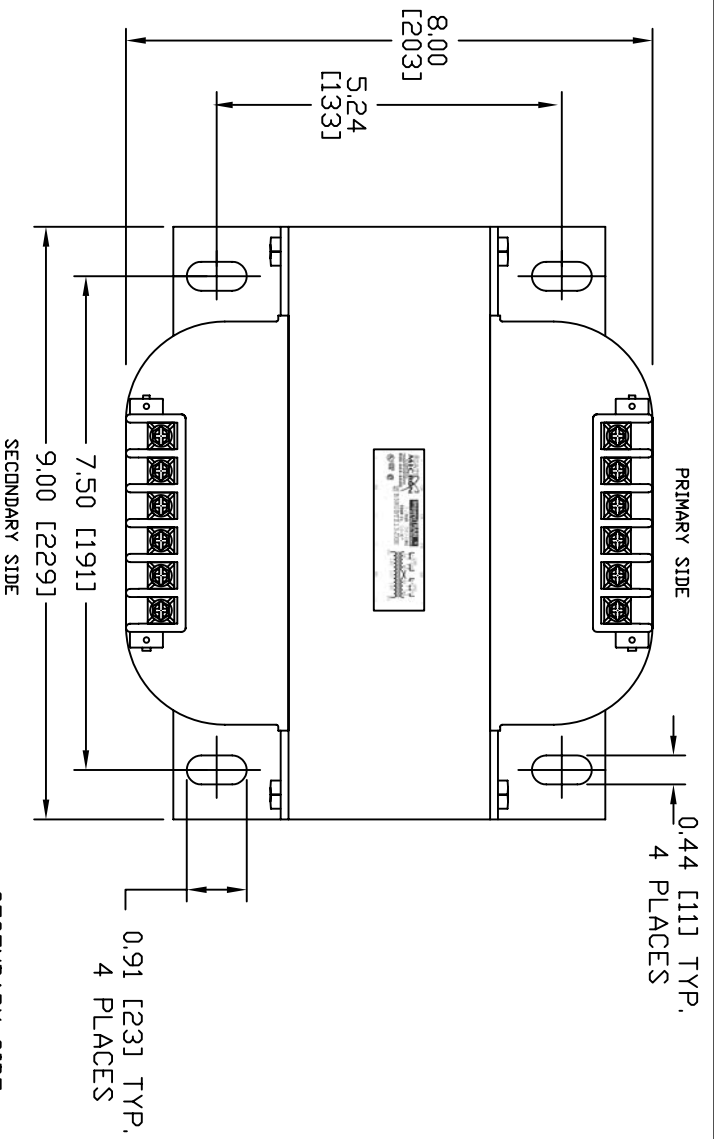

SECONDARY SIDE

PRIMARY SIDE

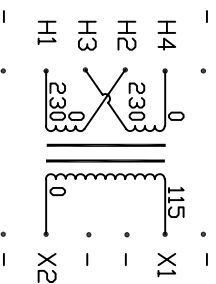

CONNECTION DIAGRAM

NOTE:

1. TORQUE CONNECTIONS TO 30 LB-IN

DATA TH CH 2H 4H
MICRON ImperVITRAN
 TRANSFORMERS U.S. PAT. NO. 3,516,040
 3.0KVA 50/60HZ
 TEMP. CL. 180C°
 CAT. NO. B3K0BTZ13JXH
 800 664-4660
 UL LISTED 702X
 230 460
 240 480
 H1 H2 H3 H4
 1 3 2 4
 1 3 2 4
 X2 110 115 120 X1

PACKAGED ACCESSORIES	
1	1 PAIR DF JUMPERS
-	-
-	-

DATE	BY	REVISION	DESCRIPTION
12/26/07	SMITH	J.G.V.	DESIGN

MICRON MICRON INDUSTRIES CORPORATION
 14000 W. 10TH AVENUE, SUITE 200
 DENVER, CO 80231
 TEL: 303.751.1000 FAX: 303.751.1001
 WWW.MICRONTRANSFORMERS.COM

SIZE	SCALE
C	NAME

B3K0BTZ13JXH