

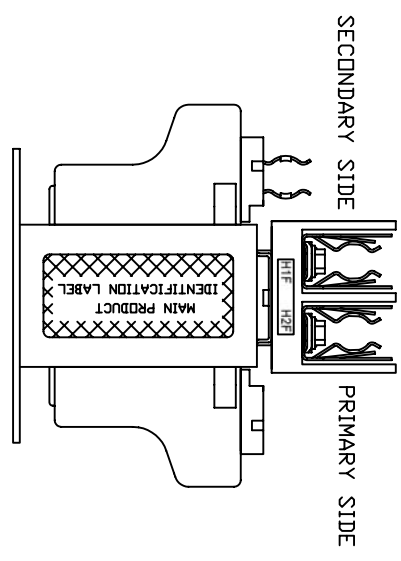


TERMINAL SCREWS ARE COMBINATION
8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

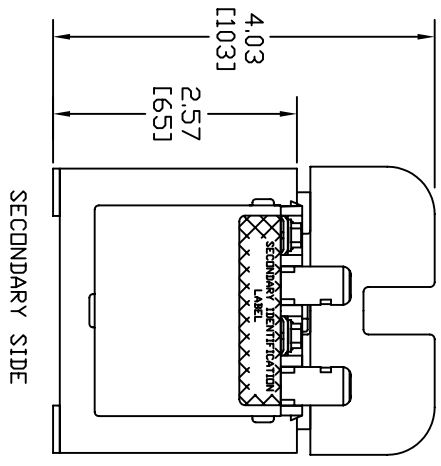

Transformer Specifications	
PRIMARY VOLTAGE(S)	575 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	75
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	3.4 LBS

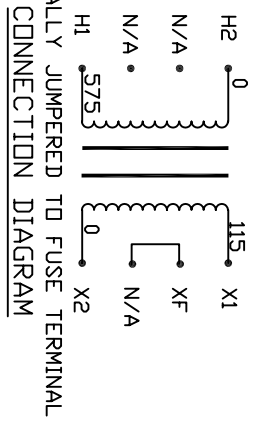

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN.
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2".
 3. ALL MEASUREMENTS IN INCHES(MM).

MAIN PRODUCT
IDENTIFICATION LABEL

MICRON CONTROL TRANSFORMERS
800 664-4660
www.microntransformers.com

Impervitran
U.S. PAT. NO. 3516040


75VA 50/60HZ
TEMP CL. 105°C

CAT. NO. B075WZ13RK
SERIES 2


05084

UL US LISTED 702X

PRIMARY IDENTIFICATION LABEL

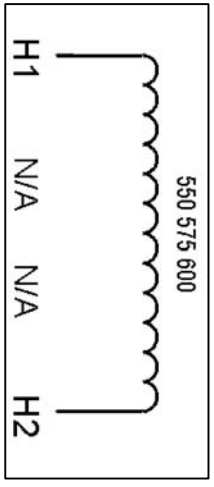

SECONDARY IDENTIFICATION LABEL

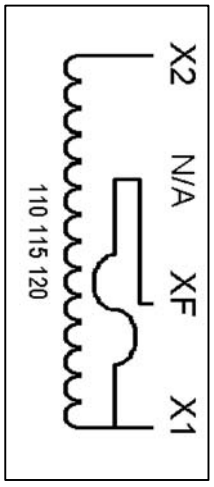

PACKAGED ACCESSORIES

QTY	DESCRIPTION	REV	DATE	BY	CHKD	APPROVED
1						

MICRON TRANSFORMERS

MICRON INDUSTRIES CORPORATION
14, 08000
www.microntransformers.com

DATE: 1/9/08
SCALE: NONE
C

B075WZ13RK