
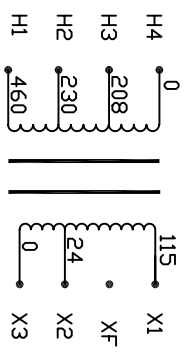
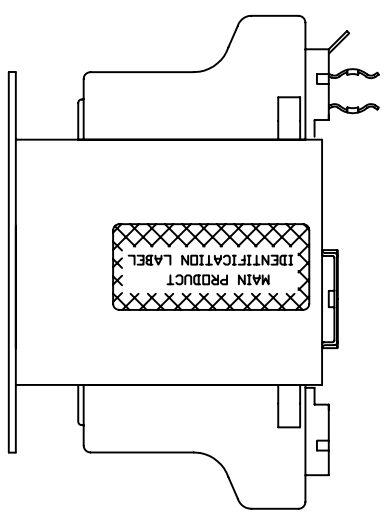


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER

INPUT VOLTAGE	H4-H3	H4-H2	H4-H1	OUTPUT VOLTAGE	XF-X2	XF-X1
208	240	480	25	120	24	115
220	230	460	23	110		
200	220	440				


NOTE: IF BOTH OUTPUTS ARE USED SIMULTANEOUSLY, FUSING SHOULD BE DONE OFF OF THE TRANSFORMER, WITH X3 REPLACING XF.

Transformer Specifications	
PRIMARY VOLTAGE(S)	208/230/460 (TRIPLE)
SECONDARY VOLTAGE(S)	24/115
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	8.5 LBS

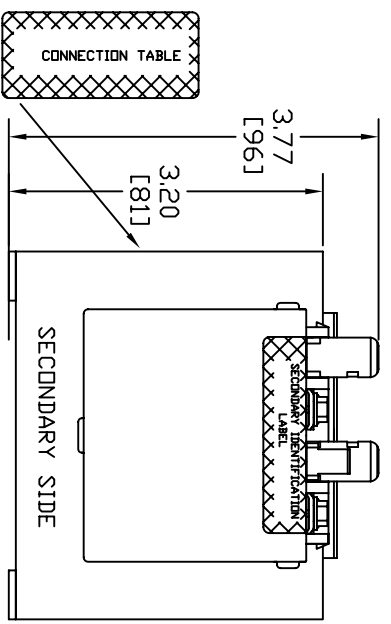


NOTE:
 1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

PRIMARY IDENTIFICATION LABEL

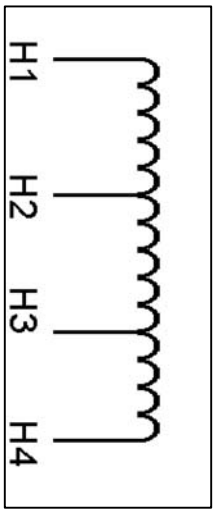

SECONDARY IDENTIFICATION LABEL

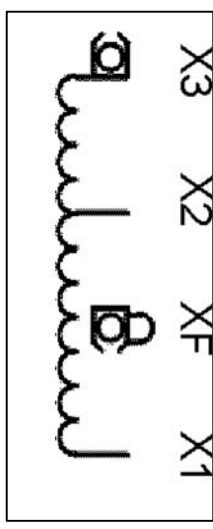

MAIN PRODUCT IDENTIFICATION LABEL

MICRON **Impervitran**
 U.S. PAT. NO. 3576040
 150VA 50/60HZ
 TEMP CL. 130°C
 CAT. NO. B150-2003-1F
 SERIES 2
 44075

UL LISTED 702X

PACKAGED ACCESSORIES	
1	-
-	-
-	-

MICRON PART NO.	DATE	REVISED BY	DESIGNED BY	CHECKED BY	APPROVED BY
	11/7/07	JGV			

MICRON INDUSTRIES CORPORATION
 17400 E. 14th Avenue, Suite 100
 Aurora, CO 80012
 www.microntransformers.com

SIZE SCALE: NONE
 B150-2003-1F