

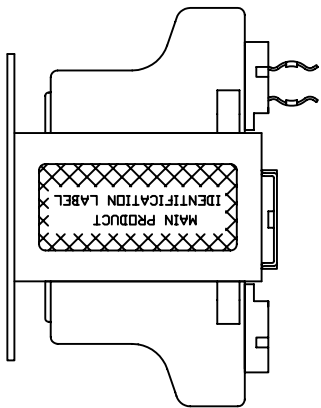


Transformer Specifications	
PRIMARY VOLTAGE(S)	208/277
SECONDARY VOLTAGE(S)	120
RATED V.A.	75
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	3.4 LBS

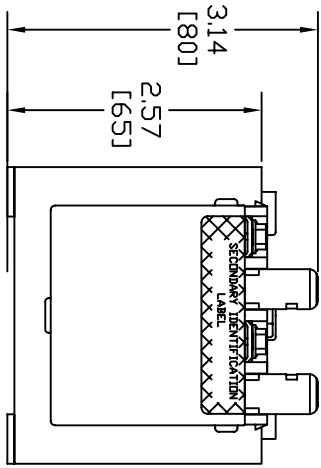


TERMINAL SCREWS ARE COMBINATION 8-32 PHIL-SLOT-1/4" HEX WITH SEMS WASHER


- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

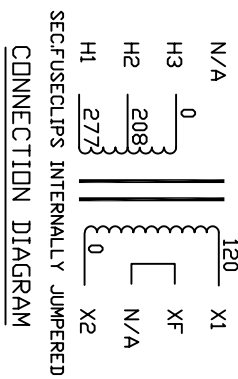

PRIMARY IDENTIFICATION LABEL

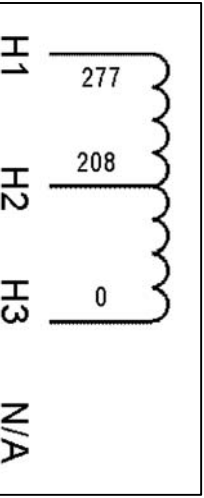

SECONDARY IDENTIFICATION LABEL

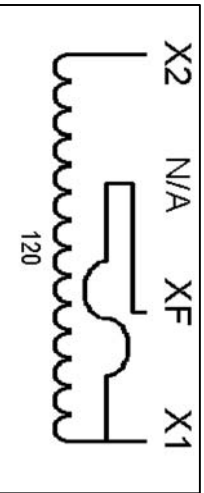

MAIN PRODUCT IDENTIFICATION LABEL

MICRON **Impervitran**
 U.S. PAT. NO. 3,516,040
 75VA 50/60HZ
 TEMP CL. 105°C
 CAT. NO. B075MQ15XK
 SERIES 2
 49071

UL US LISTED 702X

MICRON TRANSFORMERS
 800 664-4000
 WWW.MICRONTRANSFORMERS.COM

PACKAGED ACCESSORIES	
1	
-	
-	

MICRON PART NO.	B075MQ15XK
-----------------	------------

DATE	12/7/07	BY	JGV	ISSUED	APPROVED
RELEASE DATE					

MICRON INDUSTRIES CORPORATION
 17700 CHURCH ROAD, SUITE 1000, FORT WORTH, TX 76155
 14, 08000 WWW.MICRONTRANSFORMERS.COM