

NOARK

Information Sheet

22 mm Pilot Devices

LED Indicator Lights and Pushbuttons



Ex9IL Series



Ex9PB Series



NOARK Electric's LED Indicator Lights and Pushbuttons A perfect blend of quality, performance and exceptional value

Broad Product Range

- Metal construction for superior durability and visual appeal
- Low behind the panel depth
- Mounts in a round 7/8 in (22.5 mm) hole that is interchangeable with competitor's products
- Modular construction makes assembly fast and simplifies stocking of components and complete devices

Indicator Lights

- UL listed and IP 40* (front) available for protection against dust and water

Pushbuttons

- UL recognized component and labeled IP 40** (front) for protection against dust and water




* Indicator lights available up to IP 65. Contact a NOARK representative for more information.

** Ex9PBA momentary flush pushbuttons available up to IP 65. Contact a NOARK representative for more information.


		Ex9IL
Rated Operational Voltage Ue (V)	Vac	110~380
	Vac/dc	6~48
Rated Operational Current (mA)		le≤20
Service Life (h)		≥30,000
Brightness (cd/m ²)		≥60
Basic Colors		White, Green, Red, Yellow, Blue

Note: For AC power supply, the limit voltage range is 0.85Ue~1.1Ue between terminals.

Ex9IL Product Selection Guide

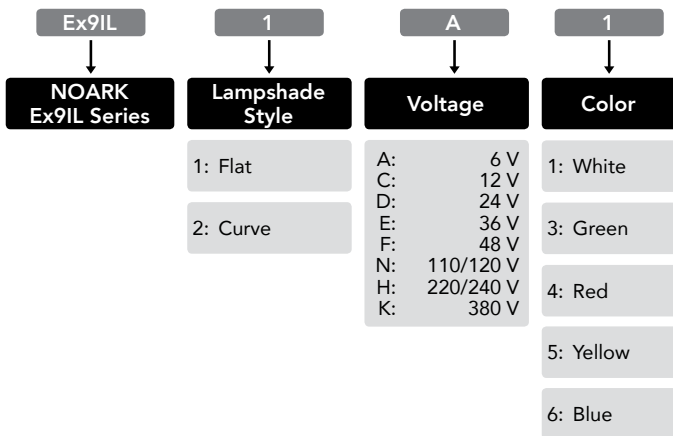

Ex9PB Product Selection

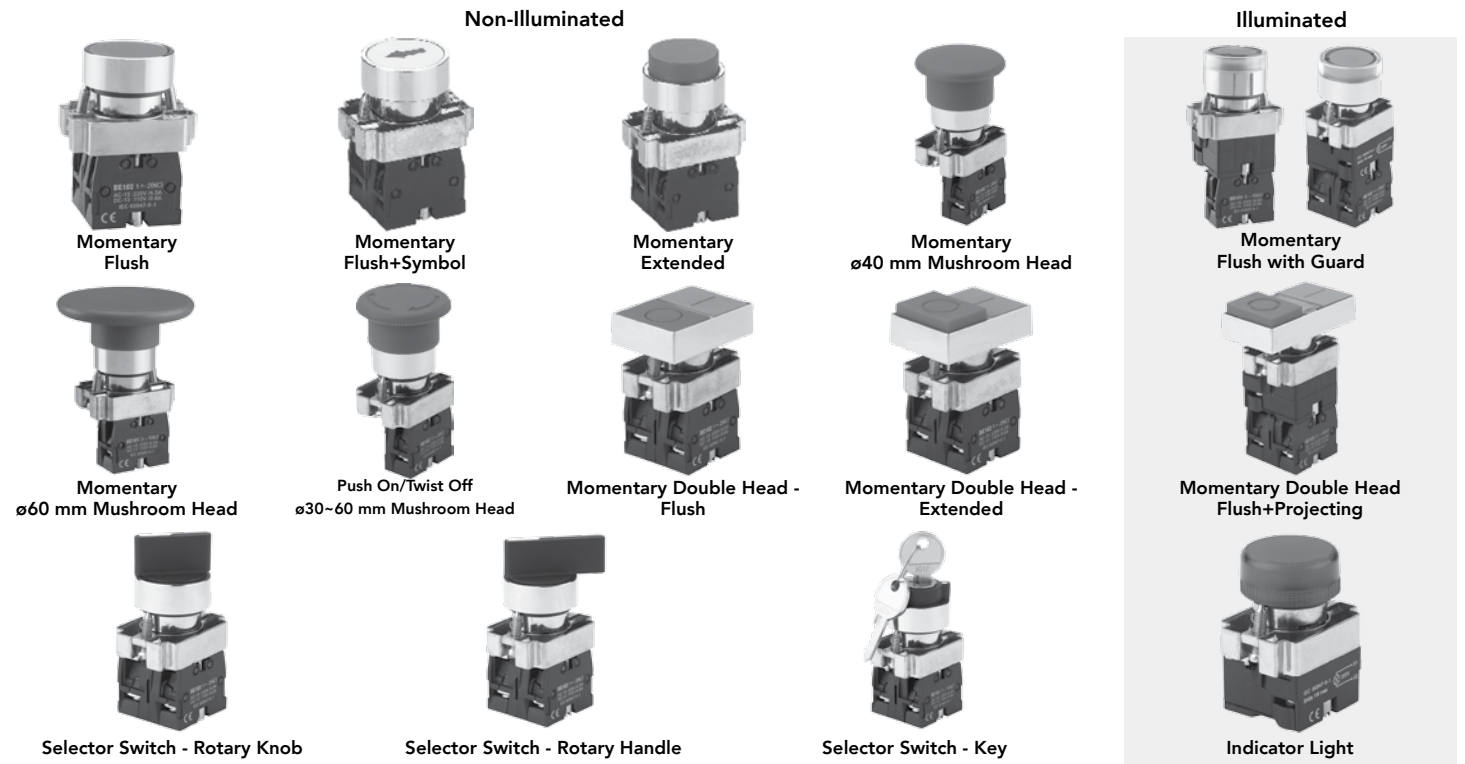

Accessories

- Contact Blocks
- Enclosures
- LED Lamp Replacements
- Middle Adapter
- Name Plate
- Replacement Heads
- Warning Label
- Waterproof Head Enclosure

NOARK Electric North America

2188 Ponoma Blvd. • Ponoma, CA 91768
(626) 330-7007

na.noark-electric.com • nasales@noark-electric.com