



NP400

RELATIVE PRESSURE TRANSMITTER – INSTRUCTIONS MANUAL – V1.0x A

INTRODUCTION

The NP400 relative pressure transmitters are robust and reliable equipment suitable for general industrial applications. They are available in several measuring ranges and process connection threads.

PRECAUTION

Before operating the transmitter, carefully read its specifications and operating instructions. In case of damage caused by incorrect operation or inappropriate usage, and its consequences, warranty becomes ineffective and null.

A specialized professional shall perform the installation.

A specific electrical power supply network should be provided for instruments use only.

UNPACKING

After unpacking the product, besides the transmitter it must be available:

- A quick guide to installation and operation.
- A sealed electrical connector.
- A screw to fix the connector to the transmitter.

IDENTIFICATION

An identification label is attached to the equipment housing. On this label, you can find detailed information about the transmitter.

Fig. 1 shows the identification label.

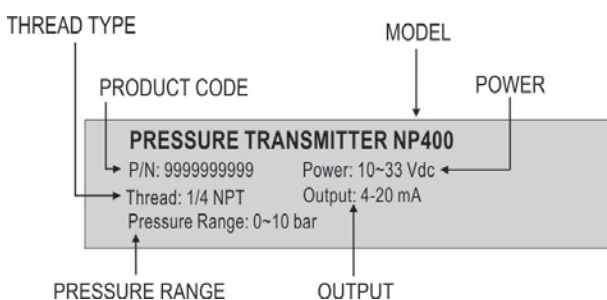


Fig. 1 – Transmitter identification

SPECIFICATIONS

Pressure Range:

0-2 / 0-5 / 0-10 / 0-20 / 0-50 / 0-100 bar (*)

Measurement Accuracy:

< ±0.5 % pressure range

< ±1.0 % pressure range for 0-100 bar model

Including linearity, hysteresis and repeatability, in 25 °C

Thermal Deviation Maximum:

< ± 0.06 % the span / °C

Overpressure Range:

Twice the pressure range upper value.

Rupture Pressure:

Three times the pressure range upper value.

Output Signal (Output):

Electric current, 4-20 mA, 2 wires.

Power Supply (Power):

10 to 33 Vdc

Maximum Load (RL):

$RL = (Vdc - 10) / 0.02 (\Omega)$

Where: Vdc= Power supply voltage

Electrical Connection:

Connector for Type A valves (DIN EN 175301-803), IP65.

Conductor 1.5 mm² (max.) and cables between 6 and 8 mm in diameter.

Operating Temperature:

-20 to 70 °C

Medium Temperature:

-20 to 100 °C

Dynamic Response:

< 30 ms

Process Connection (Thread):

¼ NPT; ½ NPT; ½ BSP (*)

Materials:

Metal housing of the transmitter: Stainless steel 316

Sensor: Ceramic (Al₂O₃ 96 %)

Sealing ring: FKM

Wetted parts:

Sensor (Ceramic), sealing ring (FKM) and metal connection (stainless steel 316).

Compatibility: Any gas or liquid compatible with the constituent materials of the wetted parts.

(*) Information available on the product identification label.

ELECTRICAL CONNECTIONS

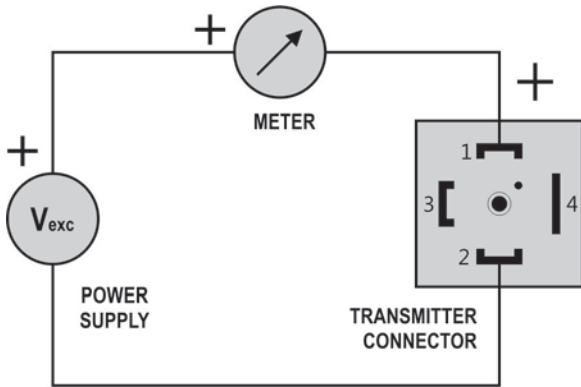


Fig. 2 – Electrical connections

Installation recommendations

- The instruments must be powered from a dedicated instrumentation power supply.
- It is strongly recommended to apply RC'S FILTERS (noise suppressor) to contactor coils, solenoids, etc.
- To improve measurement stability, immunity and safety, it is recommended to use system grounding.

DIMENSIONS

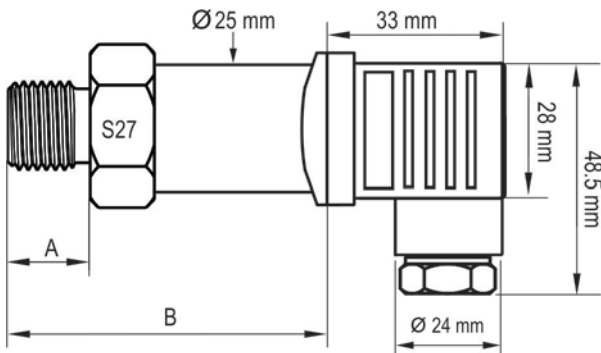


Fig. 3 – Transmitter dimensions

THREAD	A (mm)	B (mm)	WEIGHT (g)
NPT ¼	15.5	52.5	106
NPT ½	20.0	57	159
BSP ½	15.0	52	121

Table 1 – Transmitter thread type, dimensions and weight

WARRANTY

Warranty conditions are on our website www.novusautomation.com/warranty.