




SPECIFICATIONS

[General Specifications]

Model		CWA3S-24-CD
Color Code		CD
Luminous Color		Daylight
Color Temperature (typ.)		6500 K
Illuminance (at 24V DC,1m)		100 lx
Total Luminous Flux (at 24V DC)		350 lm
Rated Voltage		24V DC (Polarized)
Operating Voltage Range		Rated Voltage ±10%
Signal Wire Current (Rated Current Consumption)	Typ.	180 mA
	Max.	198 mA
Operating Ambient Temperature		-30 °C to +60 °C
Operating Ambient Humidity		Less than 90% (No condensation)
Storage Ambient Temperature		-35 °C to +65 °C
Storage Ambient Humidity		Less than 90% (No condensation)
Mounting Direction		All Directions
Protection Rating		IP65 (IEC 60529) (Cable connection ends not included)
Vibration Resistance		19.6 m/s <sup>2</sup> (30Hz, Back and Forth, Up and Down, Left and Right for 2 hrs. each)
Mass		215±10 g
Outer Dimensions		Refer to the Outer Dimension Drawing
Conformity Standards		EMC Directive (EN 55015, EN 61000-6-2) RoHS Directive (EN 50581) UL Listed (File No.E306141)
Remarks		· Due to the inherent properties of the LED, color variations and hue may occur.


No.CWA3S-24-CD-W18C-1\_2

PATLITE Corporation

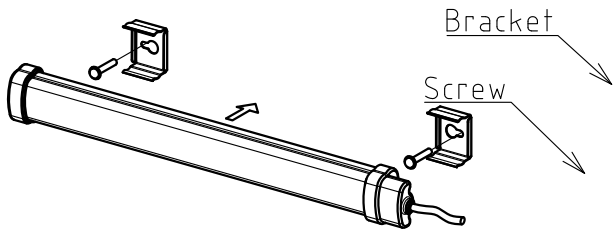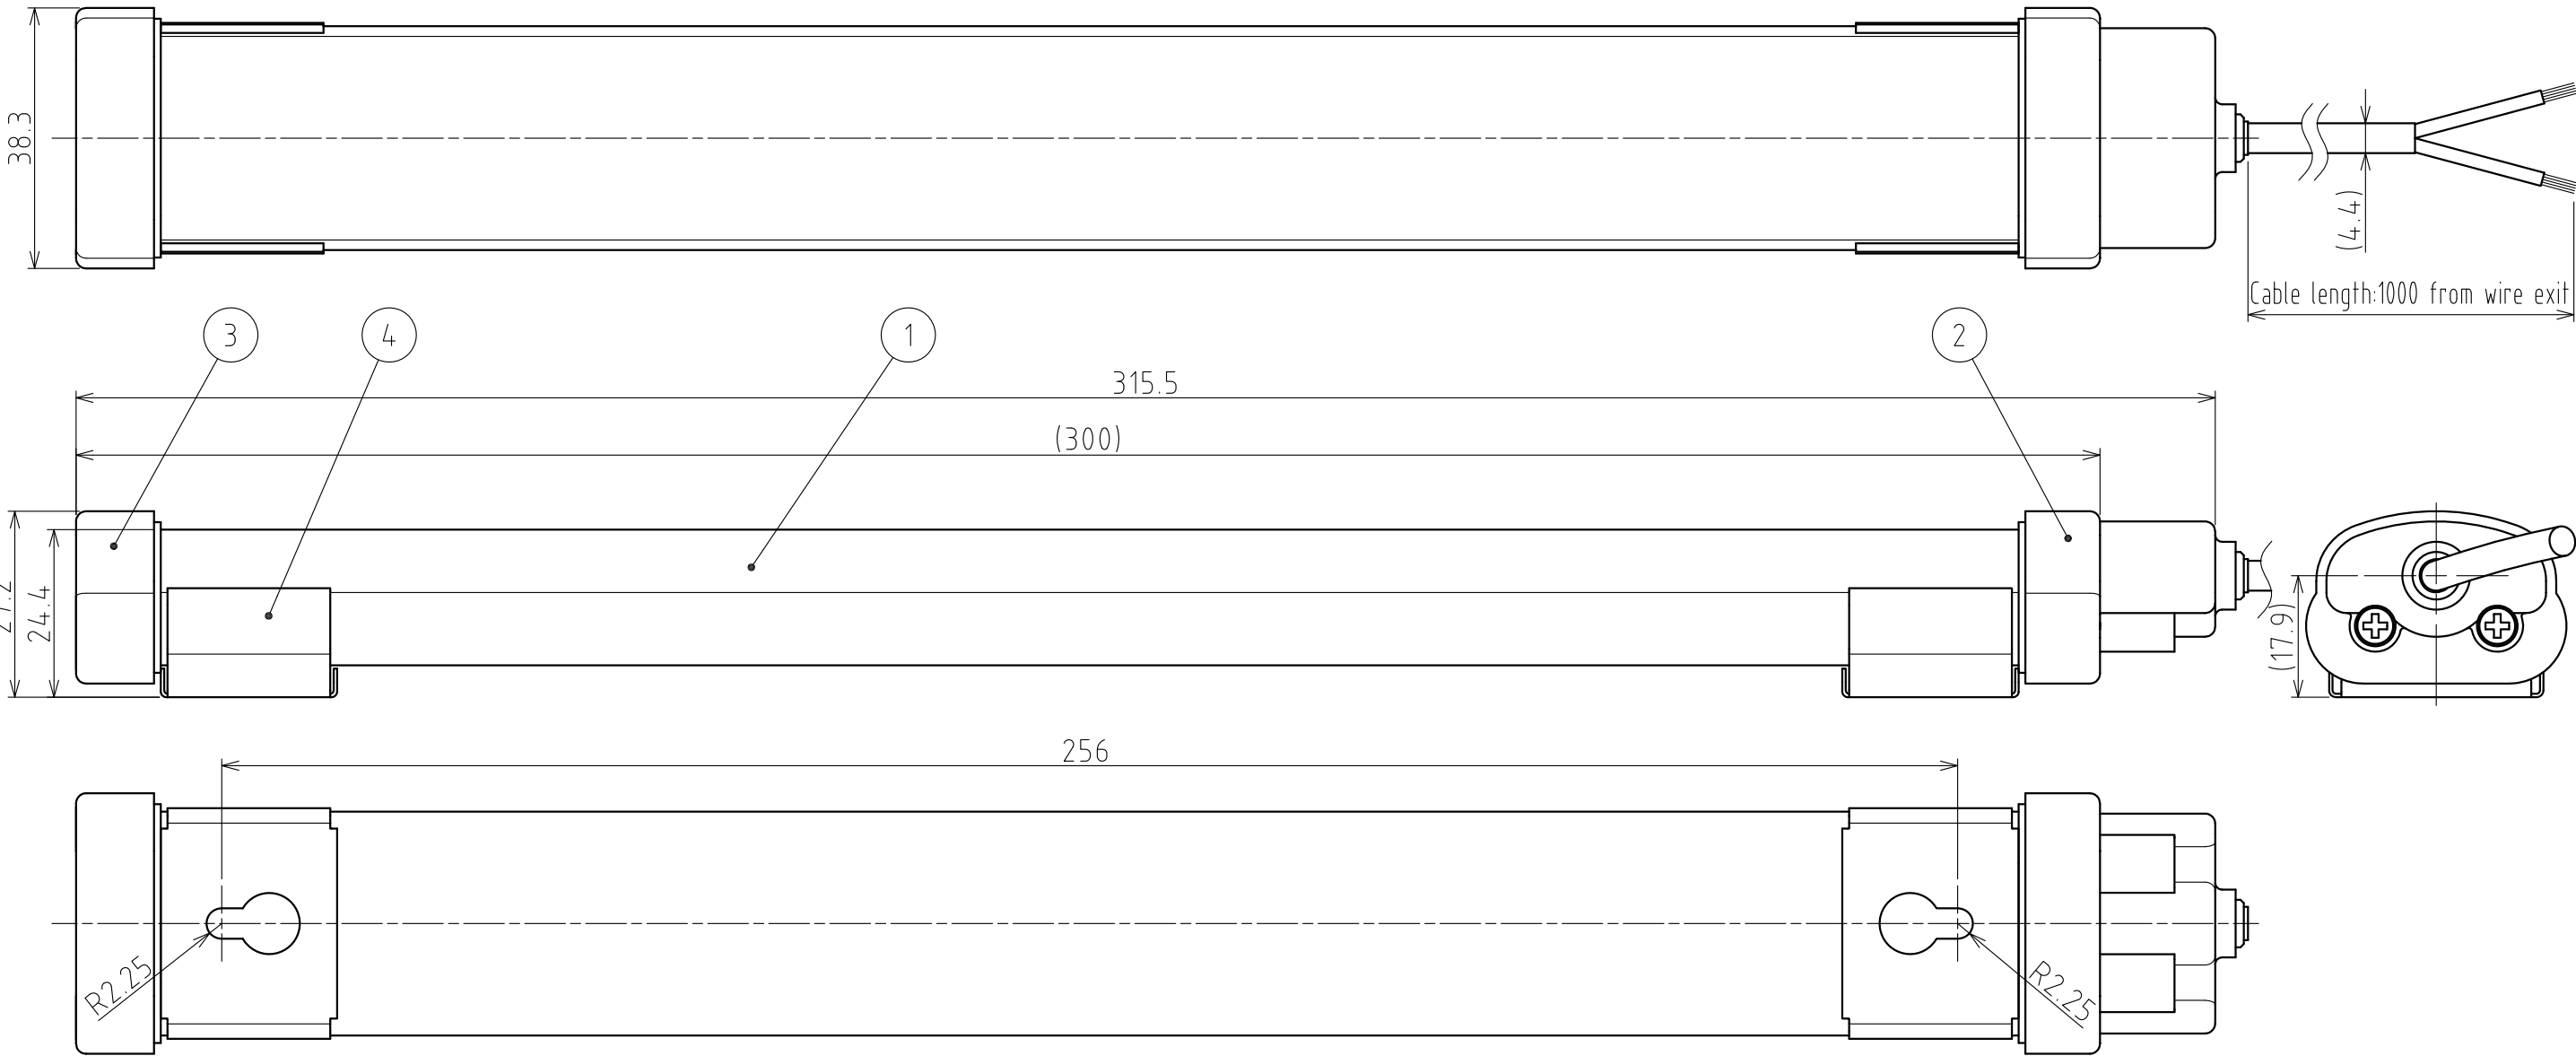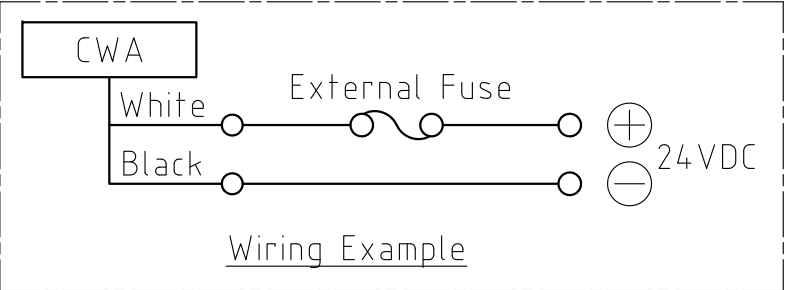

Installation Example

Install the Bracket on a sturdy surface with M4 screws,  
and snap the main unit into place.



Screw Dimensions

4	Bracket	-	2	SUS	
3	End Cap B	-	1	PC (White)	
2	End Cap A	-	1	PC (White)	
1	Cover	-	1	PC (Clear)	
番号 No.	部品名 Part Name	品目コード Part No.	数量 Qty.	材料 & 寸法 & 処理 Material & Size & Finish	記事 Remarks

CWA3S-24 Outer Dimension Drawing
株式会社 パトライト PATLITE Corporation
CWA3S-24-CD-W18C-2_2