

Vibration sensor

VIM32PL-E1AC8-0RE-IO-1V1401



- Vibration velocity in mm/s via root mean square formation (rms)
- Vibration acceleration in g via root mean square formation (rms)
- IO-Link Interface for process data, parameterization and diagnosis
- Switching output and current output parameterizable
- Additional temperature value output
- Rugged stainless steel housing


Vibration sensor with IO-Link and programmable switching output or analog current output



Function

The vibration sensor determines the vibration quantity using rms (root mean square) averaging. This form of quadratic averaging or pre-filtering enables precise trend statements about the condition of the application. The integrated IO-Link interface provides an optimal adaptation to different applications through parameterization and process data transmission for condition monitoring. The simple mounting allows for commissioning in any application.

Dimensions

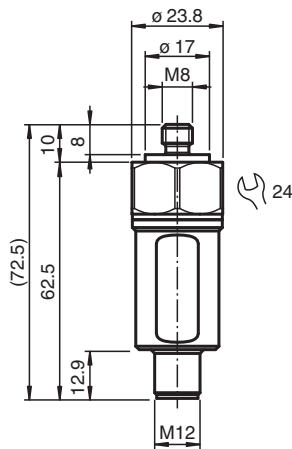

Technical Data

General specifications		
Type	Vibration sensor	
Measuring technology	MEMS	
Series	Performance Line	
Measured variable	Vibration velocity Vibration acceleration Temperature	
Measurement range		
Vibration velocity	v-rms	0 ... 128 mm/s
Vibration acceleration	a-rms	0 ... 10 g rms
Temperature	-40 ... 85 °C (-40 ... 185 °F)	

Release date: 2023-06-01 Date of issue: 2023-06-01 Filename: 70140695-100001_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Technical Data

Measurement accuracy		Vibration velocity: ± 0.1 mm/s (calibration point: 90% of the measuring range; 159.2 Hz) Complies with the tolerance requirements of DIN ISO 2954 for measurement range greater than 8 mm/s Vibration acceleration: ± 0.01 g (calibration point: 90% of the measuring range; 159.2 Hz) Complies with the tolerance requirements of DIN ISO 2954
Cross-sensitivity		< 5 % of the partial lateral acceleration, which acts exactly 90° to the measuring axis
Resolution		Vibration velocity: 0.01 mm/s Vibration acceleration: 0.01 g
Frequency range		10 ... 1000 Hz
Averaging time		for v-rms: 2 s for a-rms: 2 s
Electrical specifications		
Fusing		external fuse is required: 1 A , fast acting , 30 V DC
Operating voltage	U_B	18 ... 30 V DC
Current consumption		max. 700 mA
Power consumption	P_0	max. 21 W
Time delay before availability	t_v	≤ 1 s
Surge protection		up to 2 kV
Interface		
Interface type		IO-Link (via C/Q = Pin 4)
IO-Link revision		1.1
Device profile		Identification and Diagnosis - I&D
Process data		Input 16 Byte measurement channels: - rms value velocity - peak value acceleration - rms value acceleration - temperature per measurement channel: - measurement value 2 Byte - scaling 8 Bit - switching signals 2 Bit status data
Vendor ID		1 (0x0001)
Device ID		5308417 (0x510001)
Transfer rate		COM2 (38.4 kBit/s)
Min. cycle time		5 ms
SIO mode support		yes
Compatible master port type		Class A Class B (use 3-pole adapter or 3-wire cable)
Output 1		
Output type		C/Q - Pin 4 in SIO mode (switching signal of the measured variable is programmable)
Switching function		Normally open/closed (NO/NC)
Operating current		≤ 100 mA
Short-circuit protection		yes
Output 2		
Output type		I/Q - pin 2 (parameterizable as analog current output or switching signal) - I: analog output for the measured variable, current 4 ... 20 mA - Q: switching signal of the measured variable is parameterizable, PNP normally open
Switching function		Normally open/closed (NO/NC)
Operating current		≤ 120 mA for switching signal
Voltage drop		< 2 V
Output rated operating current		4 ... 20 mA at analog output
Load resistor		$\leq 500 \Omega$ at analog output
Short-circuit protection		yes
Standard conformity		
Degree of protection		DIN EN 60529, IP66, IP67
Shock resistance		DIN EN 60068-2-27, 60 g, 6 ms
Vibration resistance		DIN EN 60068-2-6, 16.5 g, 10 ... 1000 Hz
Approvals and certificates		

Release date: 2023-06-01 Date of issue: 2023-06-01 Filename: 70140695-100001_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

 Pepperl+Fuchs Group
www.pepperl-fuchs.com

 USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

 Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


 Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**


Technical Data

UL approval		
Ordinary Location	E468231 cULus Listed, Class III Power Source and limited energy , if UL marking is marked on the product. For use in NFPA 70 Applications only. adapters providing field wiring on request	
Maximum permissible ambient temperature	max. 80 °C (max. 176 °F)	
Ambient conditions		
Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)	
Storage temperature	-40 ... 60 °C (-40 ... 140 °F)	
Mechanical specifications		
Connection type	plug	
Housing material	Stainless steel 1.4305 / AISI 303	
Housing length	72.5 mm	
Housing diameter	23.8 mm	
Degree of protection	IP66 / IP67 only in connected state	
Connector		
Threading	M12	
Number of pins	4	
Mass	approx. 100 g	

Connection



Connection Assignment



Installation

Further Documentation



The sensor manual is also available as detailed overall documentation. Among other things, installation, grounding concepts and mounting are described there in detail.

You can access the manual via the product detail page at www.pepperl-fuchs.com.
















Note

The correct electrical connection and the selection of the appropriate grounding concept are crucial for malfunction-free operation of the sensor. For detailed information you may refer to the manual of the sensor.




Accessories

	EMCAD-M08-1,25-M08-1,25/36	EMC adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread M8 x 1.25, screw-in depth 8
	MONAD-M08-1,25-M08-1,25K/368	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M8 x 1.25, screw-in depth 19.5

Accessories

	MONAD-M08-1,25-M10-1,5/36	Mounting adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread M10 x 1.5, screw-in depth 18
	MONAD-M08-1,25-M30-3,5/368	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M30 x 3.5, screw-in depth 45
	RSL3-CS-SC-M55P200	Protective rubber sleeve for VIM3* vibration sensors against ingress of moisture and mechanical effects
	MONAD-M08-1,25-1,2Z-BSPT/36	Mounting adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread NPT1/2", screw-in depth 24
	V1-G-BK2M-PUR-U-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PUR cable black, UL-approved, drag chain suitable, torsion resistant
	V1-G-BK5M-PUR-U-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PUR cable black, UL-approved, drag chain suitable, torsion resistant
	V1-G-BK10M-PUR-U-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PUR cable black, UL-approved, drag chain suitable, torsion resistant
	V1-G-0,6M-PUR-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PUR cable grey
	IO-Link-Master02-USB	IO-Link master, supply via USB port or separate power supply, LED indicators, M12 plug for sensor connection
	ICE1-8IOL-G60L-V1D	Ethernet IO-Link module with 8 inputs/outputs
	ICE1-8IOL-G30L-V1D	Ethernet IO-Link module with 8 inputs/outputs
	ICE2-8IOL-G65L-V1D	EtherNet/IP IO-Link master with 8 inputs/outputs
	ICE3-8IOL-G65L-V1D	PROFINET IO IO-Link master with 8 inputs/outputs
	ICE2-8IOL-K45S-RJ45	EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, screw terminal
	ICE3-8IOL-K45P-RJ45	PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, push-in terminals
	ICE3-8IOL-K45S-RJ45	PROFINET IO IO-Link master with 8 inputs/outputs, DIN rail, screw terminal
	ICE2-8IOL-K45P-RJ45	EtherNet/IP IO-Link master with 8 inputs/outputs, DIN rail, push-in connectors
	V1-G-BK0,6M-PUR-U-V1-G	Cordset M12 socket straight to M12 plug straight A-coded, 4-pin, PUR cable black, UL-approved, drag chain suitable, torsion resistant
	MONAD-M08-1,25-M06-1,0/36	Mounting adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread M6 x 1.0, screw-in depth 10
	MONAD-M08-1,25-M10-1,5/8	Mounting adapter for VIM3*/VIM6* vibration sensors, internal thread M8 x 1.25 x 10, external thread M10 x 1.5, screw-in depth 18

Accessories

	MONAD-M08-1,25-M16-2,0/368	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M16 x 2.0, screw-in depth 27
	MONAD-M08-1,25-M20-2,5/368	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M20 x 2.5, screw-in depth 34
	MONAD-M08-1,25-M24-3,0/368	Mounting adapter for VIM3*/VIM6*/VIM8* vibration sensors, internal thread M8 x 1.25 x 10, external thread M24 x 3.0, screw-in depth 40