

PUSHBUTTON ENCLOSURES FOR 22.5MM PUSHBUTTONS

Application

Designed to offer protection for miniature oil-tight pushbuttons, switches, and pilot lights from dust, water, dirt and oil. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction

- 0.063" carbon steel.
- Continuously welded seams.
- Captivated cover screws thread into sealed wells.
- 4-way miniature pushbutton holes accept all brands of oil-tight pushbuttons, switches and pilot lights. Hole diameter is 0.87" (22.5 mm).
- Immediate removal of cover is permitted.
- Pour in place oil and water resistant gasket.
- Welded mounting provision top and bottom of back.

Finish

ANSI-61 gray powder coated inside and out.

IS2 Industry Standards

NEMA Type 4, 12 & Type 13
UL Listed Type 4 & 12
CSA Type 4 & 12
IEC 60529 IP66

Enclosure Product Code A1

Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard
SCE-1PBGX	3.25	3.25	3.50	IS2
SCE-2PBGX	5.13	3.25	3.50	IS2
SCE-3PBGX	7.00	3.25	3.50	IS2
SCE-4PBGX	8.88	3.25	3.50	IS2
SCE-6PBGX	8.50	6.00	4.25	IS2
SCE-9PBGX	8.50	6.50	4.25	IS2
SCE-12PBGX	10.38	6.25	4.25	IS2



SCE-1PBGX




SCE-2PBGX




SCE-3PBGX




SCE-4PBGX



SCE-6PBGX




SCE-9PBGX



SCE-12PBGX



PUSHBUTTON ENCLOSURES FOR 22.5MM PUSHBUTTONS TECHNICAL DATA

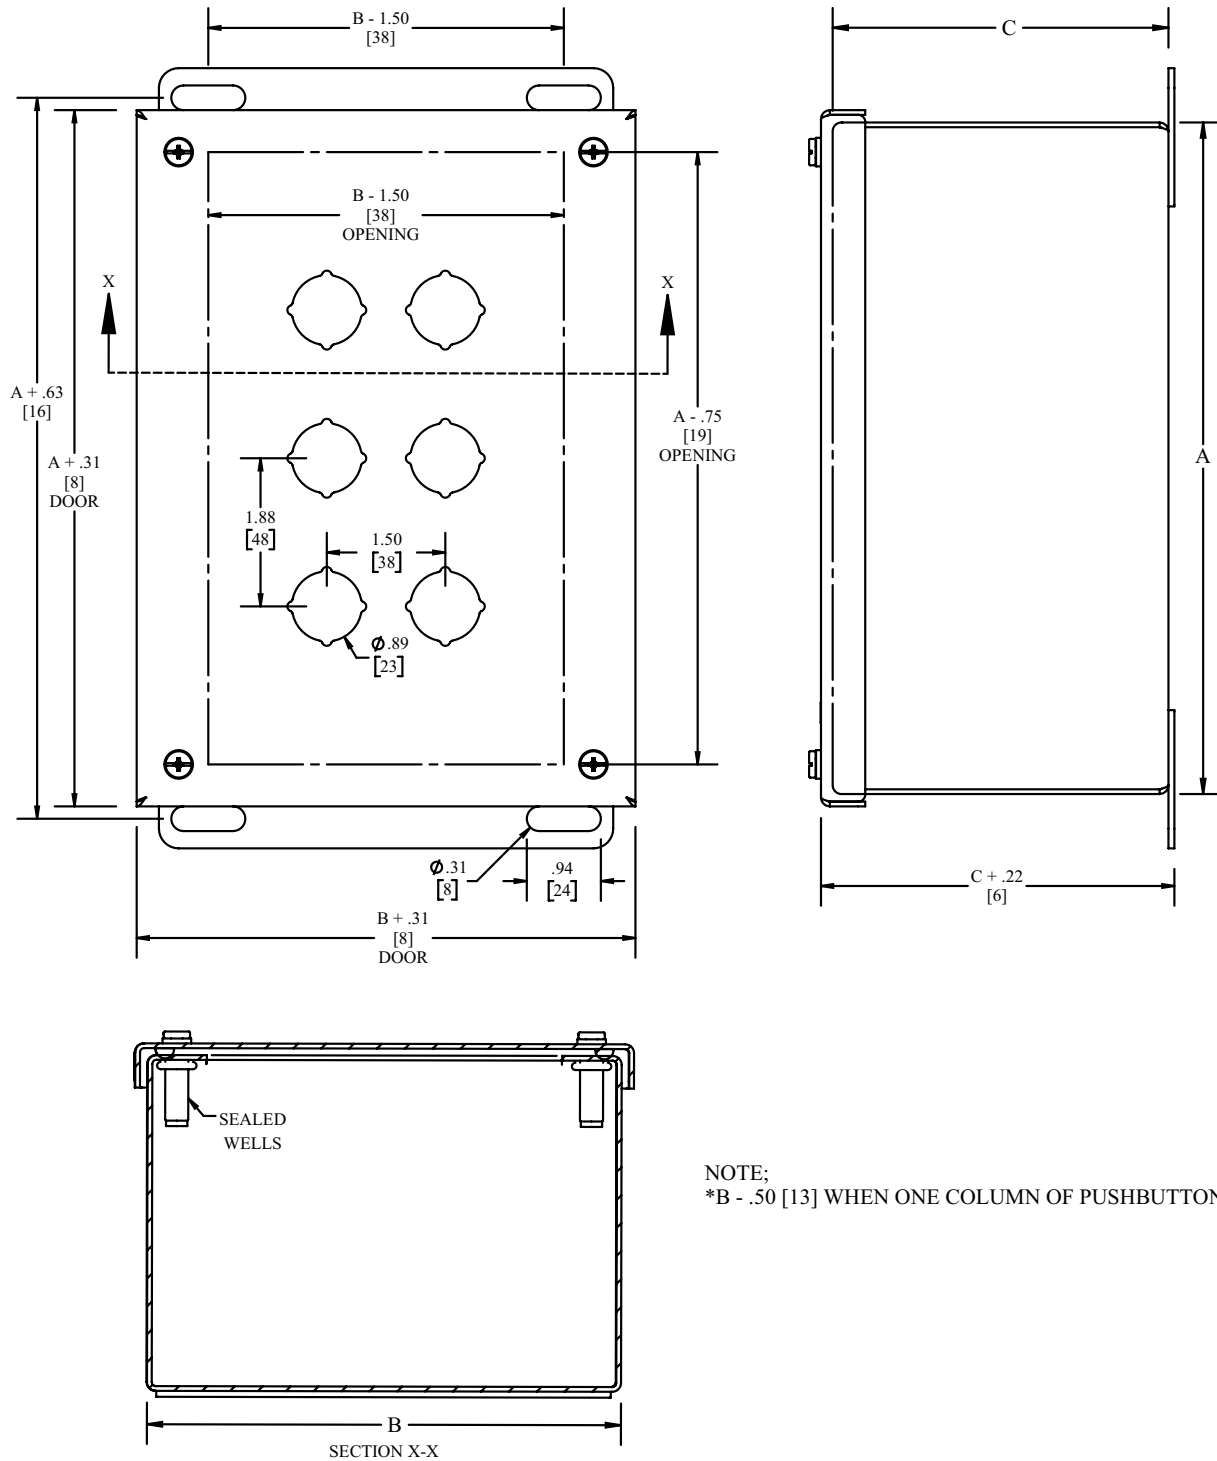

NOTE:
*B - .50 [13] WHEN ONE COLUMN OF PUSHBUTTONS