

STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE

Application

Designed to house electrical and electronic controls, instrumentation and components. For outdoor applications a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction

- 0.075" stainless steel Type 304.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Collar studs provided for mounting optional sub-panels.
- Removable center posts permit easy sub-panel installation.
- Mounting holes in back of the enclosure for wall mounting.
- Mounting hardware, sealing washers and hole plugs included.
- Stainless steel concealed hinges.
- Removable and interchangeable doors.
- Black keylocking padlocking handles.
- 3-point latching mechanism.
- Removable print pocket.
- Pour in place oil & water resistant gasket.
- Ground stud on door and body.

Finish

#4 brushed finish on all exterior surfaces. Optional sub-panels powder coated white.

Options

Provisions for mechanical interlock. See accessory section to order.

Notes

Mechanical interlock not for use in enclosures 24" in height.

IS6 Industry Standards

NEMA Type 3R, 4, 4X, 12 & Type 13
 UL Listed Type 3R, 4, 4X & 12
 CSA Type 3R, 4, 4X & 12
 IEC 60529 IP66

***To maintain Type 3R listing, Drainage is required. Install equally rated drainage device or drill a 1/8 to 1/4 inch hole in the bottom center of the enclosure, approximately 1 inch from the right, and 1 inch from the left for drainage, use listed rain-tight or wet location hubs. Drip shield over the door is recommended for all outdoor applications.

Enclosure Product Code S5



Sub-Panel (P3)

Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	Catalog No.	Panel Height (D)	Panel Width (E)
SCE-24EL4210SSWFLP	24.00	42.00	10.00	IS6	SCE-42P24	39.00	21.00
SCE-24EL4810SSWFLP	24.00	48.00	10.00	IS6	SCE-48P24	45.00	21.00
SCE-30EL4210SSWFLP	30.00	42.00	10.00	IS6	SCE-42P30	39.00	27.00
SCE-30EL4810SSWFLP	30.00	48.00	10.00	IS6	SCE-48P30	45.00	27.00
SCE-30EL6010SSWFLP	30.00	60.00	10.00	IS6	SCE-60P30	57.00	27.00
SCE-36EL4212SSWFLP	36.00	42.00	12.00	IS6	SCE-42P36	39.00	33.00
SCE-36EL4812SSWFLP	36.00	48.00	12.00	IS6	SCE-48P36	45.00	33.00
SCE-36EL6012SSWFLP	36.00	60.00	12.00	IS6	SCE-60P36	57.00	33.00
SCE-42EL4212SSWFLP	42.00	42.00	12.00	IS6	SCE-42P42	39.00	39.00
SCE-42EL4812SSWFLP	42.00	48.00	12.00	IS6	SCE-48P42	45.00	39.00
SCE-42EL6012SSWFALP	42.00	60.00	12.00	IS6	SCE-60BFP42	56.00	38.00
SCE-48EL4812SSWFLP	48.00	48.00	12.00	IS6	SCE-48P48	44.00	44.00



STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE

TECHNICAL DATA

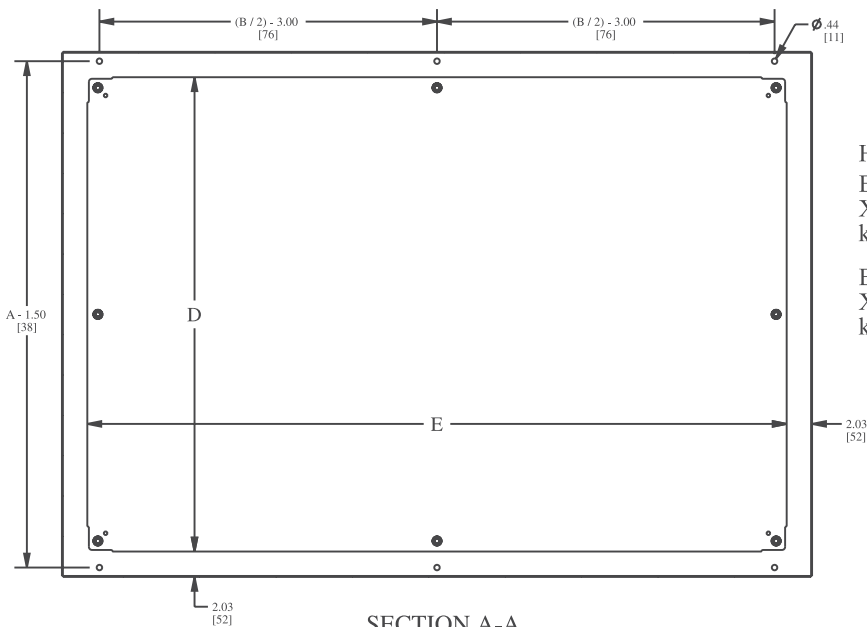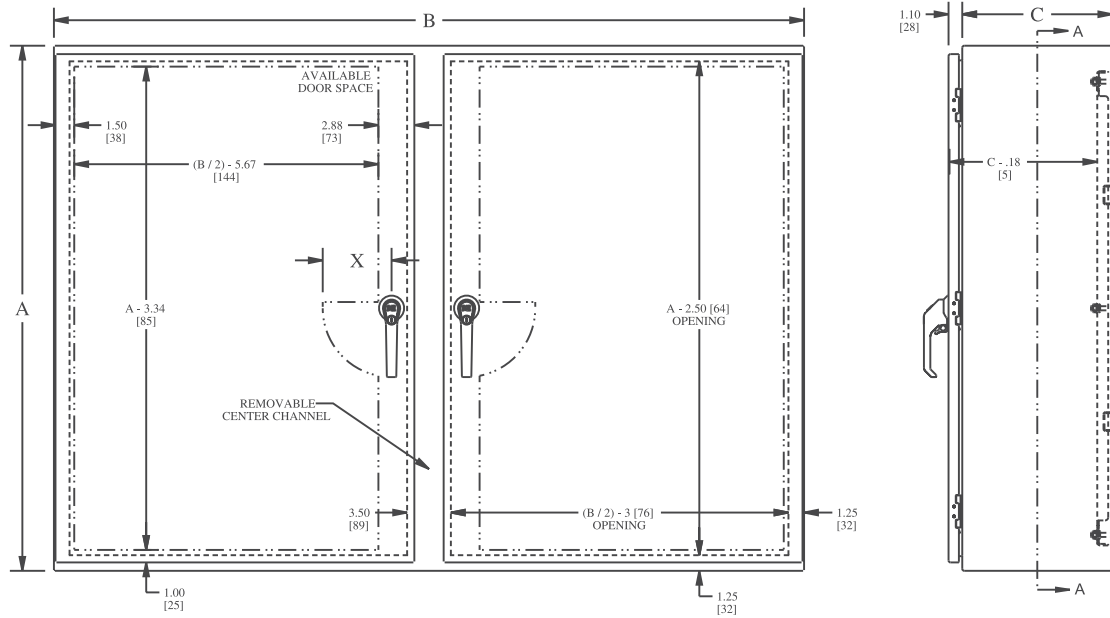

HANDLE NOTES:
 Enclosures ≤ 42.00 [1067] in height
 $X = 5.50$ [140] and uses 5.00 [127]
 key-locking/padlocking handle.
 Enclosures > 42.00 [1067] in height
 $X = 6.75$ [171] and uses 7.00 [178]
 key-locking/padlocking handle.