

STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT ENCLOSURES WITH 3-POINT HARDWARE

Application

Designed to house electrical and electronic controls, instrumentation and components in indoor or outdoor locations. For outdoor applications a drip shield is recommended. For installation information, consult our Installation Manual at www.saginawcontrol.com.

Construction

- 0.075" stainless steel Type 304 & 316/316L.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Collar studs provided for mounting optional sub-panels.
- Mounting holes in back of the enclosure for wall mounting.
- Mounting hardware, sealing washers and hole plugs included.
- Stainless steel concealed hinges.
- Removable and interchangeable doors.
- Black zinc die cast keylocking/padlocking handles.
- 3-point latching mechanism.
- Black quarter turn latches as required.
- Removable print pocket.
- Pour in place oil and water resistant gasket
- Ground stud on door and body.

Finish

#4 brushed finish on all exterior surfaces. Optional sub-panels powder coated white.

IS6 Industry Standards

NEMA Type 3R, 4, 4X, 12 & Type 13

UL Listed Type 3R, 4, 4X & 12

CSA Type 3R, 4, 4X & 12

IEC 60529 IP66

***To maintain Type 3R listing, Drainage is required. Install equally rated drainage device or drill a 1/8 to 1/4 inch hole in the bottom center of the enclosure, approximately 1 inch from the right, and 1 inch from the left for drainage, use listed rain-tight or wet location hubs. Drip shield over the door is recommended for all outdoor applications.

304 STAINLESS STEEL

Enclosure Product Code S9					Sub-Panel (P3')		
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	Catalog No.	Panel Height (D)	Panel Width (E)
SCE-24EL2010SSLPPL	24.00	20.00	10.00	IS6	SCE-24P20	21.00	17.00
SCE-24EL2410SSLPPL	24.00	24.00	10.00	IS6	SCE-24P24	21.00	21.00
SCE-30EL2412SSLPPL	30.00	24.00	12.00	IS6	SCE-30P24	27.00	21.00
SCE-30EL3012SSLPPL	30.00	30.00	12.00	IS6	SCE-30P30	27.00	27.00
SCE-36EL2412SSLPPL	36.00	24.00	12.00	IS6	SCE-36P24	33.00	21.00
SCE-36EL3012SSLPPL	36.00	30.00	12.00	IS6	SCE-36P30	33.00	27.00
SCE-36EL3612SSLPPL	36.00	36.00	12.00	IS6	SCE-36P30	33.00	27.00
SCE-42EL3612SSLPPL	42.00	36.00	12.00	IS6	SCE-42P36	39.00	33.00
SCE-48EL3612SSLPPL	48.00	36.00	12.00	IS6	SCE-48P36	45.00	33.00
SCE-48EL3616SSLPPL	48.00	36.00	16.00	IS6	SCE-48P36	45.00	33.00
SCE-60EL3612SSLPPL	60.00	36.00	12.00	IS6	SCE-60P36	57.00	33.00
SCE-60EL3616SSLPPL	60.00	36.00	16.00	IS6	SCE-60P36	57.00	33.00
SCE-60EL3624SSLPPL	60.00	36.00	24.00	IS6	SCE-60P36	57.00	33.00
SCE-72EL3624SSLPPL	72.00	36.00	24.00	IS6	SCE-72P36	69.00	33.00




316 STAINLESS STEEL

Enclosure Product Code S9					Sub-Panel (P3')		
Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	Catalog No.	Panel Height (D)	Panel Width (E)
SCE-24EL2010SS6LPPL	24.00	20.00	10.00	IS6	SCE-24P20	21.00	17.00
SCE-24EL2410SS6LPPL	24.00	24.00	10.00	IS6	SCE-24P24	21.00	21.00
SCE-30EL2412SS6LPPL	30.00	24.00	12.00	IS6	SCE-30P24	27.00	21.00
SCE-30EL3012SS6LPPL	30.00	30.00	12.00	IS6	SCE-30P30	27.00	27.00
SCE-36EL2412SS6LPPL	36.00	24.00	12.00	IS6	SCE-36P24	33.00	21.00
SCE-36EL3012SS6LPPL	36.00	30.00	12.00	IS6	SCE-36P30	33.00	27.00
SCE-42EL3612SS6LPPL	42.00	36.00	12.00	IS6	SCE-42P36	39.00	33.00
SCE-60EL3612SS6LPPL	60.00	36.00	12.00	IS6	SCE-60P36	57.00	33.00



STAINLESS STEEL ENVIROLINE® SERIES WALL-MOUNT ENCLOSURES WITH 3-POINT HARDWARE

TECHNICAL DATA

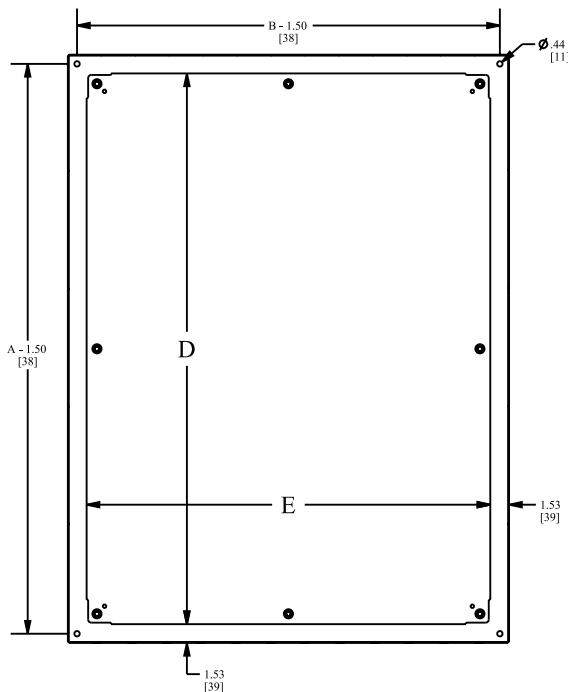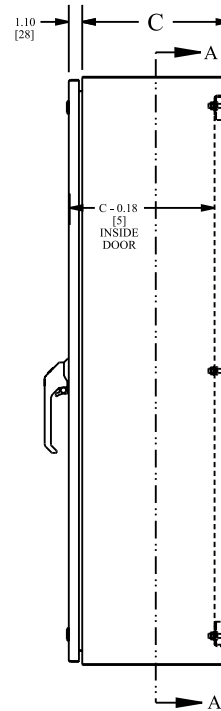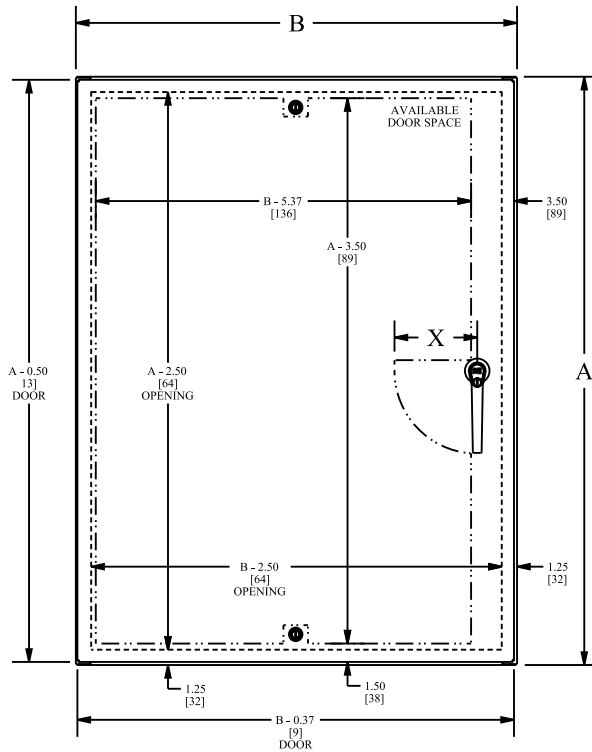

LATCH NOTES:
OMIT CENTER LATCH TOP AND BOTTOM OF DOOR WHEN DOOR WIDTH IS < 30.00 [762]

HANDLE NOTES:
WHEN ENCLOSURE HEIGHT <= 42.00 [1067]
"X" = 5.50 [140]

WHEN ENCLOSURE HEIGHT > 42.00 [1067]
"X" = 6.75 [172]