

ENVIROLINE® SERIES WALL-MOUNT TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE

Application

Designed to house electrical and electronic controls, instrumentation and components. For installation information, consult our Installation Manual at www.saginawcontrol.com. For outdoor applications a drip shield is recommended.

Construction

- 0.075" carbon steel.
- Seams continuously welded and ground smooth.
- Flange trough collar around all sides of door opening.
- Collar studs provided for mounting optional sub-panels.
- Removable center posts permit easy sub-panel installation.
- Mounting holes in back of the enclosure for wall mounting.
- Mounting hardware, sealing washers and hole plugs included.
- Concealed hinges.
- Removable and interchangeable doors.
- Black keylocking/padlocking handles.
- 3-point latching mechanism.
- Removable print pocket.
- Pour in place oil & water resistant gasket.
- Ground stud on door and body.

Finish

ANSI-61 gray powder coated inside and out. Optional sub-panels powder coated white.

Options

Optional mounting foot kit available (SCE-ELMFK6).

Notes

Mechanical Interlock not for use in Enclosures 24" in height.

IS4 Industry Standards

NEMA Type 3R, 4, 12 & Type 13
UL Listed Type 3R, 4 & 12
CSA Type 3R, 4 & 12
IEC 60529 IP66

***To maintain Type 3R listing, Drainage is required. Install equally rated drainage device or drill a 1/8 to 1/4 inch hole in the bottom center of the enclosure, approximately 1 inch from the right, and 1 inch from the left for drainage, use listed rain-tight or wet location hubs. Drip shield over the door is recommended for all outdoor applications.

102



Enclosure Product Code A4

Sub-Panel (P3)

Catalog No.	Height (A)	Width (B)	Depth (C)	Industry Standard	Catalog No.	Panel Height (D)	Panel Width (E)
SCE-24EL4210WFLP	24.00	42.00	10.00	IS4	SCE-42P24	39.00	21.00
SCE-24EL4810WFLP	24.00	48.00	10.00	IS4	SCE-48P24	45.00	21.00
SCE-30EL4210WFLP	30.00	42.00	10.00	IS4	SCE-42P30	39.00	27.00
SCE-30EL4810WFLP	30.00	48.00	10.00	IS4	SCE-48P30	45.00	27.00
SCE-30EL6010WFLP	30.00	60.00	10.00	IS4	SCE-60P30	57.00	27.00
SCE-36EL4216WFLP	36.00	42.00	16.00	IS4	SCE-42P36	39.00	33.00
SCE-36EL4812WFLP	36.00	48.00	12.00	IS4	SCE-48P36	45.00	33.00
SCE-36EL6012WFLP	36.00	60.00	12.00	IS4	SCE-60P36	57.00	33.00
SCE-42EL4212WFLP	42.00	42.00	12.00	IS4	SCE-42P42	39.00	39.00
SCE-42EL4812WFLP	42.00	48.00	12.00	IS4	SCE-48P42	45.00	39.00
SCE-42EL6012WFALP	42.00	60.00	12.00	IS4	SCE-60BFP42	56.00	38.00
SCE-48EL4812WFLP	48.00	48.00	12.00	IS4	SCE-48P48	44.00	44.00



ENVIROLINE® SERIES WALL-MOUNT TWO-DOOR ENCLOSURES WITH 3-POINT HARDWARE TECHNICAL DATA

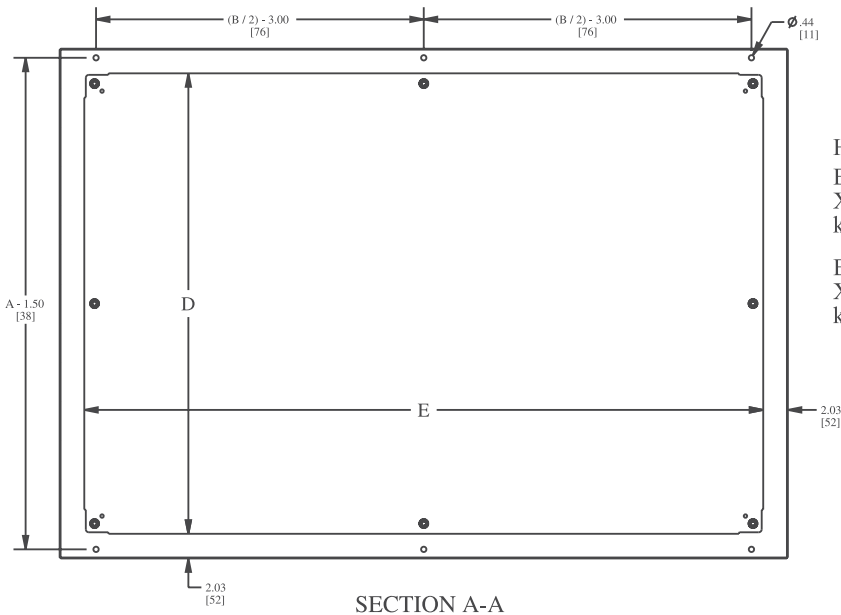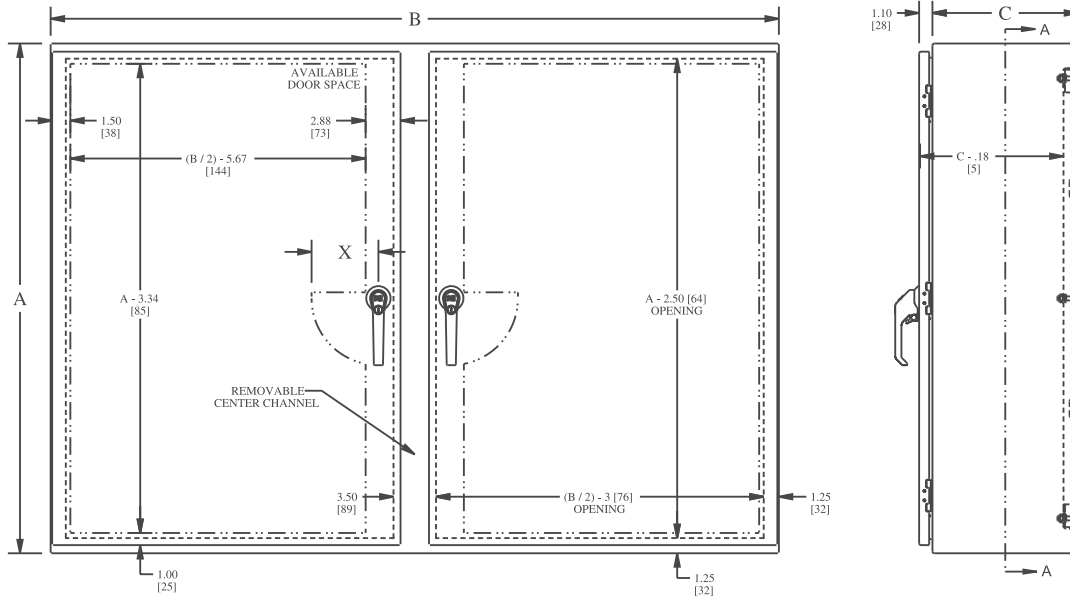

HANDLE NOTES:

Enclosures ≤ 42.00 [1067] in height
X = 5.50 [140] and uses 5.00 [127]
key-locking/padlocking handle.

Enclosures > 42.00 [1067] in height
X = 6.75 [171] and uses 7.00 [178]
key-locking/padlocking handle.