

# DATASHEET

## Contactors



### Main Features



Reference	: CWC0
Product code	: 15769769
Rated current Ie AC-3 (Ue ≤ 440 V)	: 12 A
Main contacts (power)	: 3 NO
Auxiliary contacts	: 1 NC
Control voltage	: 180-208V 50Hz/208-240V 60Hz
Type of terminal	: Screw

### Basic data

Rated utilization voltage Ue

- IEC / UL : 690 V / 600 V

Isolation voltage Ui (pollution degree 3)

- IEC / UL : 690 V / 600 V

Rated impulse withstand voltage Uimp

- Frequency limits [1] : 4 kV

- Mechanical lifespan

AC-operated contactor : 10 million

DC-operated contactor : 12 million

Electrical lifespan - Ie AC3

: 1,2 million

Number of coil terminals (AC Coil)

AC coil contactors : 2

- DC coil contactors : 2

Resistance to vibration (IEC 60068-2-6)

opened contactor : 2 g

closed contactor : 3 g

Resistance to mechanical shock (½ sinusoid = 11ms)

opened contactor : 6 g

closed contactor : 6 g

Installation

Degree of protection (IEC 60529) : DIN 35 mm (EN 50022)

Main circuit

: IP20

Control circuit

: IP20

### Alternating current - control circuit

Isolation voltage Ui (pollution degree 3) : 690 V / 600 V

- IEC / UL

Standard voltages for 50/60 Hz : 12...660 V

Command circuit operation limits

- control circuit 60 Hz : 0,4...0,76xUs

- pick up : 0,25...0,65xUs

- drop out : 0,4...0,76xUs

- control circuit 50 Hz : 0,25...0,65xUs

- pick up : 0,4...0,76xUs

- drop out : 0,25...0,65xUs

- Average coil consumption

- operating at 60 Hz : 2,5...3,5 VA

- closed magnetic circuit : 0,28

- power factor ( $\cos \varphi$ ) : 1 W

- Thermal power dissipated : 35 VA

- closing the magnetic circuit : 2,5...3,5 VA

- operating at 50 Hz : 0,28

- closed magnetic circuit : 0,28

- power factor ( $\cos \varphi$ ) : 1 W

- Thermal power dissipated : 35 VA

- closing the magnetic circuit : 35 VA

Average time of operation

- closing the NO contacts : 8...20 ms

- opening the NO contacts : 5...15 ms

### Direct current - command circuit

- IEC / UL

Standard voltages :

Command circuit operation limits

- pick up :

- drop out :

Average consumption

- closed magnetic circuit :

- closing the magnetic circuit :

Thermal power dissipated :

Average time of operation

- closing the NO contacts :

- opening the NO contacts :


### Main contacts (power)

Rated utilization current Ie

- AC-3 (Ue ≤ 440 V) : 12 A

# DATASHEET

## Contactors



- AC-4 (Ue ≤ 440 V)	: 4,5 A
- AC-1 ( $\theta \leq 55^\circ\text{C}$ , Ue ≤ 690 V)	: 22 A
Rated utilization voltage Ue	: 690 V / 600 V
- IEC / UL	: 690 V / 600 V
Number of main contacts	: 3 NO
Establishment capacity (IEC 60947)	: 120 A
Breaking capacity (IEC/EN 60947)	
- Ue≤400V	: 96 A
- Ue=500V	: 96 A
- Ue=690V	: 72 A
Temporary permissible current (without previously current conduction during 15 min at $\theta \leq 40^\circ\text{C}$ )	
- 1 sec	: 250 A
- 10 sec	: 95 A
- 10 sec	: 95 A
- 1 min	:
- 10 min	: Not available
Protection against short circuit of the contacts main fuse (gL/gG)	
- @600V - UL/CSA	: 5 kA
- type 1 coordination	: 35 A
- type 2 coordination	: 25 A
Average power dissipated per pole	
AC-1 ( $\theta \leq 55^\circ\text{C}$ , Ue ≤ 690 V)	: 2,4 W
AC-3 (Ue ≤ 440 V)	: 0,7 W
<b>Utilization category AC-3</b>	
Rated current Ie ( $\theta \leq 55^\circ\text{C}$ )	
- Ue ≤ 440V	: 12 A
- Ue ≤ 500V	: 8,8 A
- Ue ≤ 690V	: 6,6 A
Maximum percentage (600 ops./h)	: 100 %

Orientative values of power (IEC)-three-phase induction motors (50/60 Hz)-IV poles-1800 rpm

Voltage	kW	cv or HP
220 / 240 V	3 kW	4 HP
380 / 400 V	5,5 kW	7,4 HP
415 / 440 V	6,3 kW	8,4 HP
500 V	5,5 kW	7,4 HP
660 / 690 V	5,5 kW	7,4 HP

Orientative values of power (UL)

Voltage	1 Phase	3 Phase
120 V	0,5	1,5
200 V	Not applicable	Not available
208 V	1,5	1,5
240 V	2	3
480 V	Not available	7,5
600 V	Not available	7,5

### Utilization category AC-4

Rated current Ie ( $\theta \leq 55^\circ\text{C}$ )

- Ue ≤ 440V	: 4,5 A
- Ue ≤ 500V	: Not available
- Ue ≤ 690V	: Not available

Orientative values of power (IEC)-three-phase induction motors (50/60 Hz)-IV poles-1800 rpm

Voltage	kW	cv or HP
220 / 240 V	0,75 kW	1 HP
380 / 400 V	1,8 kW	2,4 HP
415 / 440 V	2,2 kW	2,9 HP
500 V	2,2 kW	2,9 HP
660 / 690 V	2,2 kW	2,9 HP

### Utilization category AC-1 (3 P/NA)

Maximum percentage (600 ops./h)

: 1

Maximum power operation $\theta \leq 55^\circ\text{C}$ (three resistors)	
Voltage	Power
220 / 240 V	8,3 kW
380 / 400 V	14,5 kW
415 / 440 V	16 kW
500 V	18 kW
660 / 690 V	25 kW

### Auxiliary contacts

Standards compliance

: IEC 600947-5-1

Insulation voltage Ui

: 690 V / 600 V

- IEC / UL

# DATASHEET

## Contactors



Rated utilization voltage Ue

- IEC / UL : 690 V / 690 V

Conventional thermal current Ith ( $\theta \leq 55^\circ\text{C}$ ) : 10 A

Rated current le - IEC 60947-5-1/AC-15

- 220 / 240 V : 10 A

- 380 / 440 V : 6 A

- 500 V : 4 A

- 660 / 690 V : 2 A

Rated current le - IEC 60947-5-1/DC-13

- 24 V : 6 A

- 48 V : 4 A

- 110 V : 2 A

- 220 V : 0,7 A

- 440 V : Not available

Establishment capacity - (AC-15 and Ue  $\leq 690\text{V}$  50/60Hz) : 10 x le

Interruption capacity - (AC-15 and Ue  $\leq 400\text{V}$  50/60Hz) : 10 x le

Protection against short circuit of the contacts main fuse (gL/gG) : 10 A

Control circuit reliability : 17/5 V/mA

Electrical lifespan : 1 Million

Mechanical lifespan : 10 million

Non-overlapping time between NO and NC contacts : Not available

Impedance per pole : Not available

### Connection

Main contacts

Type of the screw : M3 Flat/Phillips

Section of the conductors

Type of the conductor	Section (IEC)	Section (UL)
Rigid cable	1 x 0,5...2,5 mm <sup>2</sup>	1 x
	2 x 0,5...2,5 mm <sup>2</sup>	2 x
Flexible cable without terminal	1 x 0,75...2,5 mm <sup>2</sup>	1 x
	2 x 0,75...2,5 mm <sup>2</sup>	2 x
Flexible cable with terminal	1 x 0,5...2,5 mm <sup>2</sup>	1 x
	2 x 0,5...1,5 mm <sup>2</sup>	2 x

Tightening torque (IEC/UL) : 1.1 Nm / 10 lb.in

Control circuit

Type of the screw : M3 Flat/Phillips

Section of the conductors

Type of the conductor	Section (IEC)	Section (UL)
Rigid cable	1 x 0,5...2,5 mm <sup>2</sup>	1 x
	2 x 0,5...2,5 mm <sup>2</sup>	2 x
Flexible cable without terminal	1 x 0,75...2,5 mm <sup>2</sup>	1 x
	2 x 0,75...2,5 mm <sup>2</sup>	2 x
Flexible cable with terminal	1 x 0,5...2,5 mm <sup>2</sup>	1 x
	2 x 0,5...1,5 mm <sup>2</sup>	2 x

Tightening torque (IEC/UL) : 1,1 Nm / 10 lb.in

### Direct current application

Utilization category DC-1 (L/R  $\leq 1\text{ ms}$ )


Voltage	Rated utilization current (le)			
	Pole(s) in series			
1	2	3	4	
Ue $\leq 24\text{V}$	16 A	20 A	22 A	Not available
Ue $\leq 48\text{V}$	13 A	20 A	22 A	Not available
Ue $\leq 60\text{V}$	10 A	18 A	22 A	Not available
Ue $\leq 125\text{V}$	5 A	10 A	16 A	Not available
Ue $\leq 220\text{V}$	0,7 A	6 A	10 A	Not available
Ue $\leq 440\text{V}$	0,3 A	0,7 A	4 A	Not available
Ue $\leq 600\text{V}$	Not available	0,3 A	1,5 A	Not available

Utilization category DC-3 (L/R  $\leq 2.5\text{ ms}$ )

Voltage	Rated utilization current (le)			
	Pole(s) in series			
1	2	3	4	
Ue $\leq 24\text{V}$	9 A	12 A	15 A	Not available
Ue $\leq 48\text{V}$	8 A	12 A	15 A	Not available
Ue $\leq 60\text{V}$	5 A	10 A	14 A	Not available
Ue $\leq 125\text{V}$	1,5 A	5,5 A	10 A	Not available
Ue $\leq 220\text{V}$	0,4 A	1,5 A	7 A	Not available
Ue $\leq 440\text{V}$	Not available	0,2 A	1 A	Not available
Ue $\leq 600\text{V}$	Not available	Not available	0,6 A	Not available

# DATASHEET

## Contactors



Operation category DC-5 (L/R ≤ 15ms)

Voltage	Rated utilization current (Ie)			
	Pole(s) in series			
	1	2	3	4
Ue ≤ 24V	8 A	12 A	15 A	Not available
Ue ≤ 48V	8 A	12 A	15 A	Not available
Ue ≤ 60V	5 A	10 A	14 A	Not available
Ue ≤ 125V	1,5 A	5,5 A	9 A	Not available
Ue ≤ 220V	0,4 A	0,7 A	3 A	Not available
Ue ≤ 440V	Not available	Not available	0,3 A	Not available
Ue ≤ 600V	Not available	Not available	Not available	Not available

### Ambient temperature

Operation : -25 °C ... +55 °C  
 Storage : -55 °C ... +80 °C

Maximum altitude with no change of rated values [2] : 3000 m

### Dimensions

Height : 58 mm (2.28 in)  
 Width : 45 mm (1.77 in)  
 Depth : 52 mm (2.05 in)  
 Weight : 194 g

### Standards

IEC 60947-1

UL 508

### Certifications


CE, UL, UL-NOM, IRAM and EAC

### Notes


- 1) Values above 60 Hz should have current reduction;
- 2) For altitudes of 3000 to 4000 m ( $0.90 \times 0.80 \times Ie$  and  $Ui$ ) and from 4000 to 5000 m ( $0.80 \times 0.75 \times Ie$  and  $Ui$ ).

1 2 3 4 5 6


A

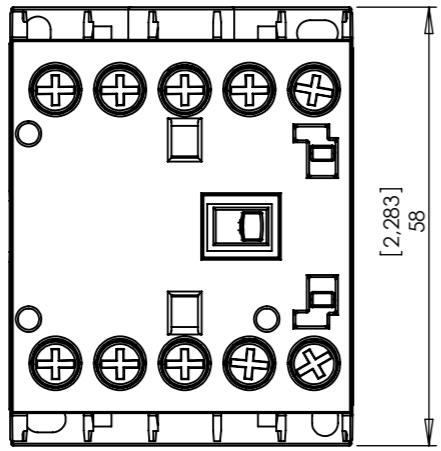


B

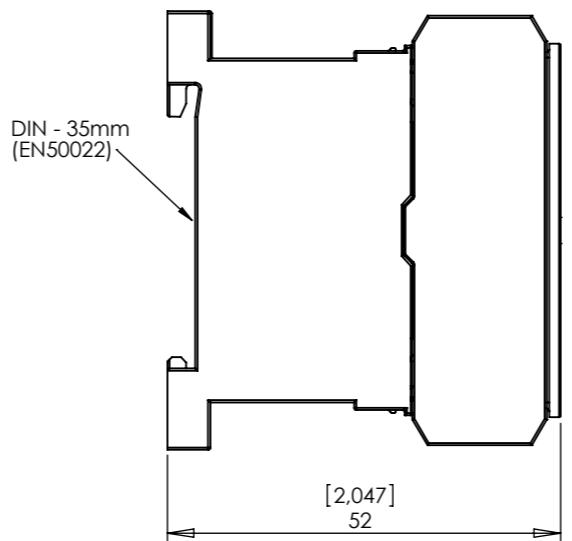


C

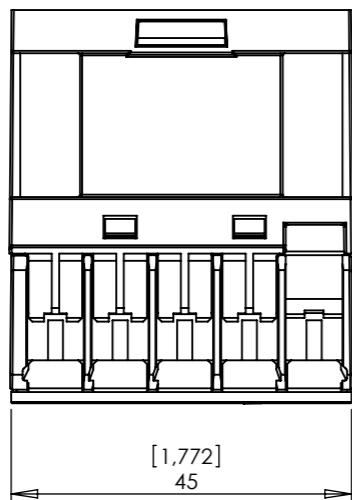

D

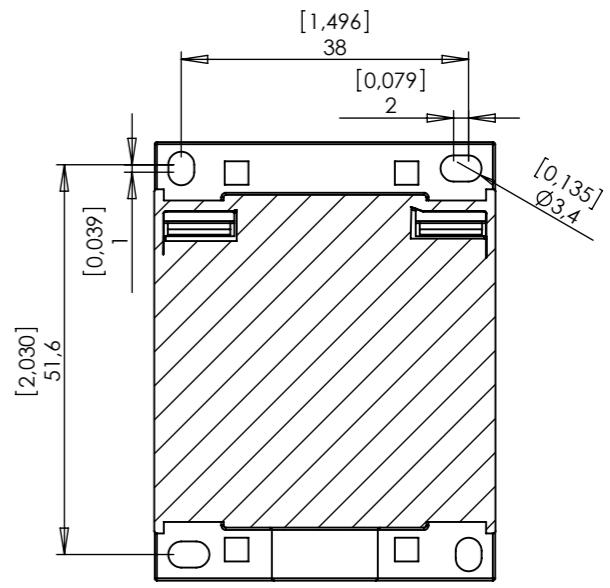

E

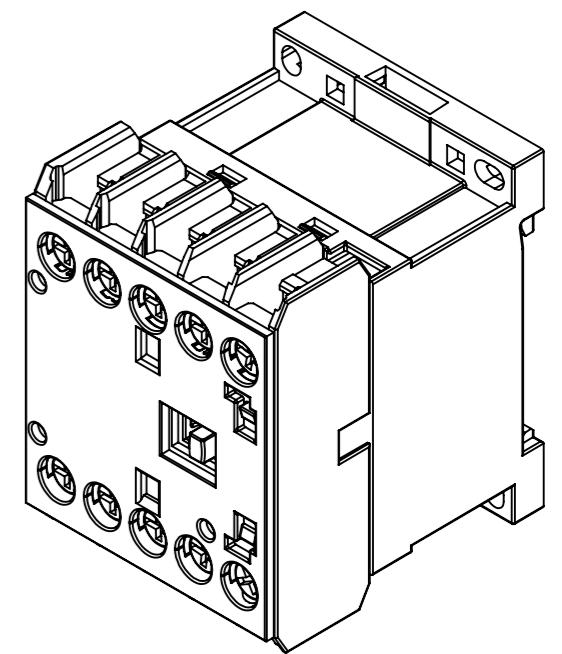

CWC07...16-CWCA0

24/02/2012

1 : 1

mm [inches]

**weg**

Los valores denotados pueden ser cambiados sin aviso previo. As informações contidas são valores de referência. The information is for reference only.

Sujeito a alteração sem aviso prévio. As informações contidas são valores de referência. The information is for reference only.