Signal Towers / Completely pre-assembled Signal Towers

eSIGN 9 Segments with Siren



ļ

| Part No.: Series: | 657.100.55 eSIGN | |
|-----------------------------|---------------------|--|
| MECHAN | ICAL DATA | |
| Height | | 271 mm |
| Diameter | | 72 mm |
| Materials | | PC |
| Dome colour | | Tranclucent |
| Housing colour | | Black |
| Protection category | | IP66 IP69K |
| Connection | | M12 plug 8-pole |
| Working temperature minimum | | -30°C |
| Working temperature maximum | | +60°C |
| Weight with packaging | | 614 g |
| Product weight | | 569 g |
| IK-Code (IEC 62262) | | IK08 |
| ELECTRIC | AL DATA | |
| Operating voltage | | 24V |
| Operating voltage type | | DC |
| Operating voltage tolerance | | +/- 10% |
| Rated operational voltage | | 24 VDC |
| Rated operational current | | 405 mA |
| Rated inrush current | | 800 mA |
| Protectio | n class | Protection class 3 |
| Pollution degree | | 3 |
| Overvoltage category | | 1 |
| Isolation voltage | | Ui = 50V / Uimp = 330V |
| Request to external PSU | | SELV/PELV |
| connectivity | | Digital entrance USB |
| OPTICAL | DATA | |
| Light source | | LED |
| Light colour | | MC >1.000.000 colours |
| Optical signal image | | Blink Double flash Flash Permanent Revolving Triple flash |
| Blink frequency | | Configurable |
| Service life optical | | 50,000 h maximum |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Signal Towers / Completely pre-assembled Signal Towers


eSIGN 9 Segments with Siren

| ACOUSTIC DATA | |
|-------------------------------|-----------------------|
| Volume (max) at 1m distance | 105 dB |
| Acoustic signal image | Multi-tone |
| Number of tones | 10 tone |
| Acoustic service life | 5,000 h minimum |
| APPROVAL DATA | |
| Conforms with CE | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC-Ex | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 4/4X/12/13 |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | No |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |
| MTTF-value [years] | 39 |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Signal Towers / Completely pre-assembled Signal Towers eSIGN 9 Segments with Siren

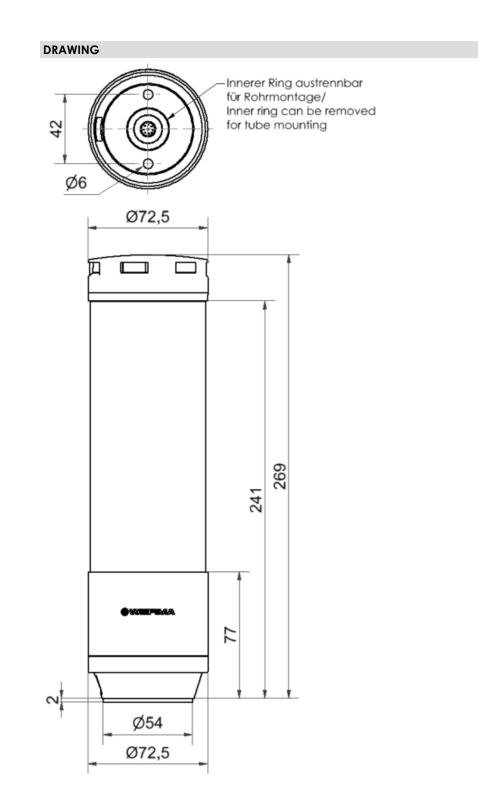

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.