




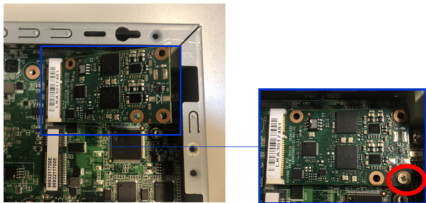
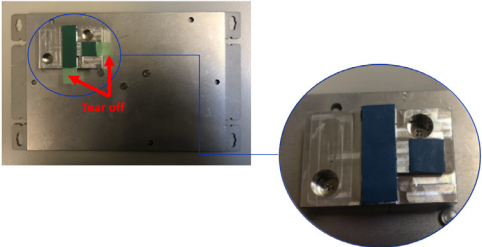
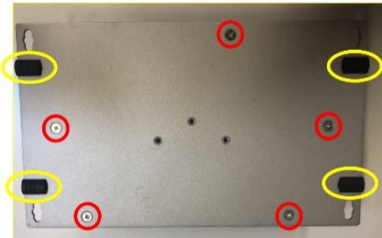
## ▶ VEGA-330 on UNO Installation Guide

For better heat expansion, UNO-2372G/2484G have to change bottom plate to support VEGA-330 module. This installation guide illustrates how to install VEGA-330 on UNO-2372G/UNO-2484G (single stack model only) with change of bottom plate.

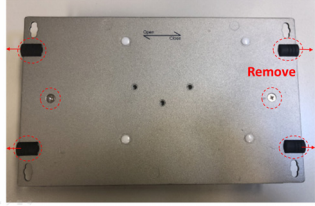
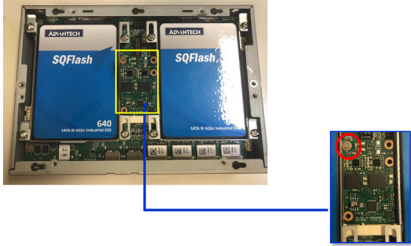
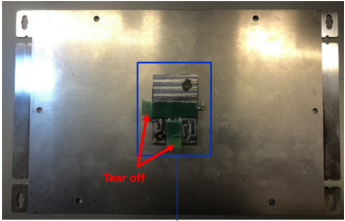
### Corresponding P/N

P/N	UNO-2372G-VEGA330	UNO-2484G-VEGA330
Packing list	<ul style="list-style-type: none"> <li>● Bottom plate x 1</li> </ul>  <ul style="list-style-type: none"> <li>● Screws x 5 (M3x6L)</li> <li>● Thermal pad (10x10x0.5)</li> <li>● Thermal pad (29.5x10x0.5)</li> </ul>	<ul style="list-style-type: none"> <li>● Bottom plate x 1</li> </ul>  <ul style="list-style-type: none"> <li>● Screws x 6 (M3x6L)</li> <li>● Thermal pad (10x10x0.5)</li> <li>● Thermal pad (29.5x10x0.5)</li> </ul>
Support platform	UNO-2372G-J021AE UNO-2372G-E021AE UNO-2372G-J121AE	UNO-2484G-6731AE UNO-2484G-6531AE UNO-2484G-6331AE UNO-2484G-7731AE UNO-2484G-7531AE UNO-2484G-7331AE UNO-2484G-7C21AE

### UNO-2372G-VEGA330 Installation steps

STEP 1.	Taking off bottom cover by removing rubber stopper(x4) and screws (x2) from UNO-2372G.	
STEP 2.	Install the VEGA-330 module on mPCIe Slot of UNO and lock the screw.	
STEP 3.	Tear off the film on thermal pad of UNO-2372G-VEGA330.	
STEP 4.	Assembly UNO-2372G-VEGA330 back on UNO-2372G by locking 5 screws and rubber stopper.	

## UNO-2484G-VEGA330 Installation steps

<p>STEP 1.</p>	<p>Taking off bottom cover by removing rubber stopper(x4) and screws (x2) from UNO-2484G.</p>	
<p>STEP 2.</p>	<p>Install the VEGA-330 module on mPCIe Slot of UNO and lock the screw.</p>	
<p>STEP 3.</p>	<p>Tear off the film on thermal pad of UNO-2484G-VEGA330.</p>	
<p>STEP 4.</p>	<p>Assembly UNO-2484G-VEGA330 back on UNO-2484G by locking 6 screws and rubber stopper.</p>	